



COAST COUNTIES TRUCK & EQUIPMENT CO.

DBA: COAST COUNTIES PETERBILT

MAIN OFFICE
1740 N. 4TH, SAN JOSE CA 95112
P.O. BOX 757, SAN JOSE, CA 95106-0757
PHONE (408) 453-5510 FAX (408) 453-7637

www.coastcounties.com



July, 12, 2019
Mr. Ronald Patterson
City of Salinas
200 Lincoln Ave
Salinas, CA 93901

Dear Ron,

Thank you for your recent interest in Coast Counties Truck & Equipment and our line of Peterbilt conventional trucks. In accordance to Sourcewell (formerly NJPA) Contract 081-716-PMC, we are pleased to provide our proposal for (1) 2021 model year Peterbilt 337 sewer cleaner/TV truck for your consideration. **Price valid 30 days**

2021 Peterbilt 337 Two Axle Chassis

| | |
|--|----------------------------|
| Total Peterbilt List Price | \$118,656.00 |
| 29.59% Sourcewell Contract Discount | <u><\$35,110.31></u> |
| Total Sourcewell Price for Peterbilt 348 Chassis | \$83,545.69 |
| Sourced Items | |
| Sewer Cleaner/TV Body | \$202,213.54 |
| Custom Frame Layout | \$1,500.00 |
| DMV Doc Fee | \$85.00 |
| Licensing Fee | \$100.00* |
| Flooring Plan Cost | \$3,780.00* |
| Extra Pre Delivery Inspection | \$1,000.00* |
| Truck Detail | \$200.00* |
| CA Tire Tax | <u>\$10.50*</u> |
| Total Sourced Items | \$208,889.04 |
| Sales Tax @ 9.25% | <u>\$26,579.34</u> |
| Total Delivered Price | \$319,014.07 |

*Items not subject to sales tax

Thanks again for considering Coast Counties Truck and Equipment under the Sourcewell Contract, and please let me know if I can be of further assistance.

Sincerely,



Dane Lamanna

□ SO. CALIFORNIA: 2044 South Vineyard Avenue, Ontario, CA 91761 • (909) 930-1822 • FAX (909) 923-2356
□ NO. CALIFORNIA: 800 East Grant Line Road, Tracy, CA 95376 • (209) 830-8600 • FAX (209) 830-8884

City of Salinas
426 Work Street
Salinas, CA 93901

July 12, 2019

Reference: Sewer Equipment of America - Sewer Cleaner/TV Truck – Sourcewell Contract # 122017-SCA – Body factory mounted on conventional chassis

Our proposal for the addition of a **Sewer Equipment Model 800-HPRTV ECO Jetter/Camera** unit to your fleet as follows:

Sewer Cleaner/TVTV – Included options shown in bold print

- 800 HPRTV ECO High Pressure Sewer Cleaner
- Dual Rear mounted Safety Reels – Jetting and Camera, Rotating and Telescoping
- Self-Leveling Color TV Camera
- " Jet Pod skid
- Color Monitor
- DVR with Removable SD card
- 1 each - 6" Jet Pod skid extension – straight view camera
- 1 each - 8" Jet Pod skid extension – straight view camera
- 1 each – 10" Jet Pod skid extension – straight view camera
- **Giant 50 GPM @ 3000 PSI Water Pump**
- Hydrostatic Drive via world Trans
- Lighted NEMA 4 Control panel, hour meter & Tachometer
- Painted steel shroud with (3) Rollup doors
- 1500 Gallon Black Duraprolene Tank – 7 years standard warranty
- Mounting to Freightliner M2 106 Chassis, Mud-flaps, Bumper, LED D.O.T. approved Lighting
- Nozzle Rack
- 25' fill hose
- 2.5" Water Fill System
- 20
- Tri-Star (Chisel Point) nozzle
- DD (High flow) nozzle
- Finned nozzle extension
- Wash-down gun w/25' hose
- Upstream pulley guide
- Operator and Owner Manual – 2 Copies paper – 1 Copy USB

Included Options:

- Automatic Level Wind with hydraulic up/down action
- Digital "Smart Counter" with on screen footage display
- Phoenix Style - Roll-out expanded metal drawer - Curbside
- Hydraulic pressure gauge
- 600' Sewer Hose (3/4" I.D. 3,000 PSI Operating Pressure)
- 50' wash-down system with retractable reel
- Fill hose storage rack
- Equipment compartment LED light
- LED Flood lights (2 each)
- LED Strobe lights (2 each)
- LED Arrow stick
- Wireless Remote: Hose reel F-N-R Control, Throttle Up/Down, Water On/Off, Kill Switch
- Air purge system (Powered by Chassis air)
- Steel Skirting and Aluminum Toolboxes (5)
- Phoenix Roll-Out Drawer - Curbside
- Long handled tool storage (Two 4" Tubes)
- Rear back up camera system w/7" color monitor mounted in cab
- Six (6) 18" D.O.T. Safety cones and holder

| | |
|--|---------------------|
| Sourcewell Body Price per Contract | \$ 208,467.57 |
| Less 3% Sourcewell Contract Discount | <u>\$ 6,254.03</u> |
| Sourcewell Customer Price | \$ 202,213.54 |
| Freight, PDI and Start-Up | <u>\$ Included</u> |
| Total Price 800-HPRTV - FOB Salinas, CA | \$ 202,213.54 |
| Sales Tax at 9.25% | <u>\$ 18,704.75</u> |
| Total cost of body, FOB Cust., Incl. sales tax | \$ 220,918.29 |

Special Notes:

1. Price quoted is for resale only. (Note resale number must be provided at time of order)
2. A Copy of the end users (City of Salinas) purchase order must be submitted with purchase order to Nixon-Egli in order to keep the Sourcewell pricing. City of Salinas' Sourcewell ID number will also be required.
3. Terms are C.O.D.
4. Delivery will be **180-210 days** after receipt of truck.
5. Trucks are to be dropped shipped to **1590 Dutch Road, Dixon IL, 61021**
6. Upon completion, the trucks will be driven to Nixon-Egli in Ontario for pre-delivery and inspection
7. All prices quoted are F.O.B. **Coast Counties Peterbilt**
8. Nixon-Egli does not pay for liquidated damages.
9. Nixon-Egli does not pay for flooring costs.
10. One year parts and labor warranty
11. One day training for operators and mechanics
12. Prices quoted are firm for 30 days.


Thank you for the opportunity to quote you on this piece of equipment

Sincerely,
Nixon-Egli Equipment Company

Gavin Singleton

Gavin Singleton
Vice President of Municipal Sales

VEHICLE SUMMARY

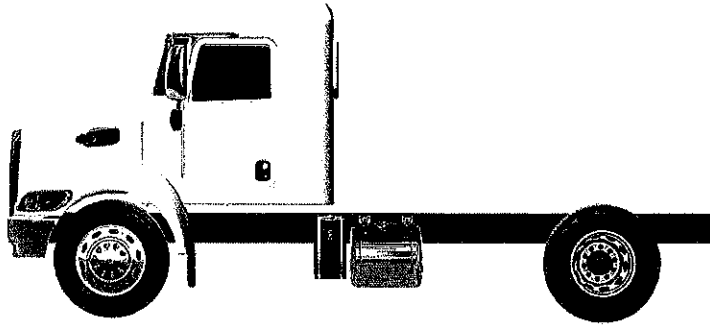

SUMMARY

VEHICLE COMPONENTS

| | | | |
|-------------------------|---------------------|------------------------|---|
| Quote/DTPO # | QUO-510509-B4W8F1 | Model | |
| Quote Name | Nixon 337 2020 PL | Engine | PACCAR PX-7 250@2400 GOV@2600 660@1600 |
| Model | Model 337 | Front Axle | Dana Spicer E1322IL 13,200 lb, 3.5 in. Drop |
| Vehicle Type | Full Truck | Front Tire | FF: YO 16Ply 11R22.5 RY023 |
| Body Type | Other Body Type | Front Wheel | FF: Accu-Lite Steel Armor 51408PK 22.5X8.25 |
| Trailer Type | | Rear Axle | Dana Spicer S21-172 Single Axle, 21000 lb |
| Intended Service | Tanker, Liquid Bulk | Rear Tire | RR: YO 14Ply 11R22.5 703ZL |
| Do Not Drive? | False | Rear Wheel | RR: Accu-Lite Steel Armor 51408PK 22.5X8.25 |
| List Price | \$118,656 | Rear Axle Ratio | 6.14 |
| Weight | 10726 # | Transmission | Allison 3000 RDS-P Transmission, Gen 5 |
| | | Suspension | Reyco 79KB Taper Leaf 21,000 lb |
| | | Frame Rail | 10-3/4" Steel Rails To 354" |
| | | Cab | Alum Cab 108in BBC Metton Hood w/Bright Crown |
| | | Sleeper | |
| | | Exhaust System | Exhaust Single RH Side of Cab |



Coast Counties Truck (C505)
920 Elvee Drive
Salinas, California 93901

City Of Salinas
22 Lincoln Ave
Salinas, California 93901
United States of America

Dane Lamanna
Phone:
Email: dlamanna@coastcounties.com

Phone:
Email:

Vehicle Summary

| Unit | | Chassis | |
|-------------------------|------------------------------|----------------------------|-------|
| Model: | Model 337 | Fr Axle Load (lbs): | 13200 |
| Type: | Full Truck | Rr Axle Load (lbs): | 21000 |
| Description 1: | Nixon 337 2020 PL | G.C.W. (lbs): | 50000 |
| Description 2: | Copy of Nixon 337 March 2019 | | |
| Application | | Road Conditions: | |
| Intended Serv.: | Tanker, Liquid Bulk | Class A (Highway) | 100 |
| Commodity: | Hazardous Waste | Class B (Hwy/Mtn) | 0 |
| | | Class C (Off-Hwy) | 0 |
| | | Class D (Off-Road) | 0 |
| Body | | Maximum Grade: | 6 |
| Type: | Other Body Type | Wheelbase (in): | 176 |
| Length (ft): | 14 | Overhang (in): | 43 |
| Height (ft): | 13.5 | Fr Axle to BOC (in): | 69.8 |
| Max Laden Weight (lbs): | 1000 | | |
| | | Cab to Axle (in): | 106.2 |
| Trailer | | Cab to EOF (in): | 149.2 |
| No. of Trailer Axles: | 0 | Overall Comb. Length (in): | 257.2 |
| Type: | | | |
| Length (ft): | 0 | Special Req. | |
| Height (ft): | 0 | | |
| Kingpin Inset (in): | 0 | | |
| Corner Radius (in): | 0 | | |
| Restrictions | | | |
| Length (ft): | 40 | | |
| Width (in): | 102 | | |
| Height (ft): | 13.5 | | |

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.



| Sales Code | Std/Opt | Description | Weight |
|-----------------------------------|---------|---|--------|
| Base Model | | | |
| 0003371 | S | Model 337 The Peterbilt Model 337 is built to take on the big jobs. That's why it's available as a Class 7 truck or tractor with a GVW up to 33,000 lbs. With a full range of suspensions and in an all-wheel-drive configuration, the 337 delivers an ideal match for applications such as wrecker, tanker, beverage delivery, municipal utilities – just about any job you can throw at it. | 10,070 |
| 0091240 | O | Hazardous Waste | 0 |
| 0093020 | O | Tanker, Liquid Bulk General freight (linehaul) service using a liquid bulk tanker body or tanker trailer. | 0 |
| 0095200 | O | Other Body Type | 0 |
| 0098170 | S | United States Registry Canadian Registry Package Requires Air Conditioning Excise Tax Canada, Speedometer to be KPH ipo MPH, Daytime Running Lights and Rubber Battery Pad in Bottom of Battery Box. | 0 |
| Configuration | | | |
| 0200700 | S | Not Applicable Secondary Manufacturer | 0 |
| Frame & Equipment | | | |
| 0514000 | O | 10-3/4" Steel Rails To 354" 10.75x3.5x.375 Dimension, 2,136,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 17.8 cubic inches. Weight: 1.74 lbs/inch pair | 200 |
| 0612230 | O | Custom Wheelbase or Overhang Engineering approval may be required. | 0 |
| 0613090 | O | Three-Piece Crossmembers | 3 |
| 0644090 | S | EOF Square without Crossmember For use with body builder installed crossmember. | 0 |
| 0651090 | S | Omit Rear Mudflaps and Hangers | 0 |
| Front Axle & Equipment | | | |
| 1011840 | O | Dana Spicer E1322IL 13,200 lb, 3.5 in. Drop Axle is designed for applications with a gross axle weight rating (GAWR) of 13,200 pounds. The axles have exclusive one-piece forged design knuckle including steer arm, tie rod arm and spindle. This feature helps in greater durability and reduced maintenance. | 7 |
| 1111200 | O | Taper Leaf Springs, Shocks 13,200 lb Hendrickson taper leaf springs for 13,200 lbs. offer high value to weight ratio. | 9 |
| 1243040 | S | Power Steering Sheppard HD94 | 0 |



| Sales Code | Std/Opt | Description | Weight |
|----------------------------------|---------|--|--------|
| | | RH Sheppard HD94 power steering gear is a light weight version of heavy duty line-haul power steering gear. For use with 12,000 to 14,000 lb. axle ratings. | |
| 1250180 | O | Power Steering Reservoir Frame Mounted | 0 |
| | | The power steering reservoir is a steering system that eases drivability by applying hydraulic pressure to the steering gear. | |
| 1353545 | O | PHP10 Aluminum PreSet Hubs | 0 |
| 1380070 | O | Greasable Front Spring Pins | 0 |
| 1380240 | O | Dana Spicer Wide Track IPO Standard | 15 |
| | | Dana Spicer wide track front axles offer added stability and deliver greater turn angles. 71in KPI IPO 69in for E1202, E1322, E1462, D2000F front axles. | |
| 1380260 | S | Bendix Air Cam Front Drum Brakes 16.5x5 | 0 |
| | | For use with 10,000 lbs to 14,600 lbs steer axles. Includes automatic slack adjusters & outboard mounted brake drums. | |
| 1391410 | O | Gusseted Cam Brackets, Steer Axle | 0 |
| 1392970 | O | Heavy Duty Cam Bushings, Steer Axle | 0 |
| Rear Axle & Equipment | | | |
| 1513270 | O | Dana Spicer S21-172 Single Axle, 21000 lb | 250 |
| 1616360 | O | PHP10 Aluminum PreSet Hubs | 0 |
| 1631310 | S | Standard Stroke Parking Brakes | 0 |
| | | Drive Axle(s). Not for use on U.S. or Canada Tractors, other than car carriers. | |
| 1680450 | O | Rear Brake Camshaft Reinforcement | 9 |
| | | Rear brake camshaft reinforcement helps guard against wear and corrosion. | |
| 1680490 | O | Gusseted Cam Brackets, Drive Axle(s) | 2 |
| 1680500 | S | SBM Valve | 0 |
| | | Full trucks require a spring brake modulation (SBM) system for emergency braking application. This system requires an SBM valve and a relay valve with spring brakes on the rear axles. The SBM valve allows the foot valve to operate the rear axle spring brakes if a failure exists in the rear air system. | |
| 1680795 | O | Diff Lock, Single Drive Axle with Speed Interlock | 30 |
| 1680950 | S | Stability System Not Selected Or Not Available | 0 |
| 1681337 | S | Single Drive Axle (Model 337) | 0 |
| 1682430 | S | Anti-Lock Braking System (ABS) 4S4M | 0 |
| | | ABS-6. Includes air braking system. | |
| 1684200 | S | Synthetic Axle Lubricant All Axles | 0 |

Price Level: January 1, 2020
Deal: Nixon 337 2020 PL
Printed On: 7/12/2019 11:36:29 AM

Date: July 12, 2019
Quote Number: QUO-510509-B4W8F1



| Sales Code | Std/Opt | Description | Weight |
|------------|---------|--|--------|
| | | Peterbilt heavy duty models include Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life. | |
| 1687010 | S | Bendix Air Cam Rear Drum Brakes 16.5x7 Bendix Air Cam Rear Drum Brakes to fit all heavy haul, construction, refuse and highway truck and tractor applications. Includes Automatic Slack Adjusters & Outboard Mounted Brake Drums. | 0 |
| 1688110 | O | Heavy Duty Cam Bushings, Drive Axle(s) | 0 |
| 1706140 | O | Ratio 6.14 Rear Axle | 0 |
| 1816140 | S | Reyco 79KB Taper Leaf 21,000 lb | 0 |
| 1911280 | O | Reyco Helper Springs 3,000 lb For use with Reyco 79KB suspension | 60 |

Engine & Equipment

| | | | |
|---------|---|--|------|
| 2073212 | O | PACCAR PX-7 250@2400 GOV@2600 660@1600 Efficiency (2017 Emissions) Includes alum flywheel housing, cruise control, and J1939 provisions (provides an interface point for the Electronic Service Analysis-ESA and other PACCAR approved diagnostic tools). Chevron Delo LE SAE 10W30 engine oil is specially formulated for new low emissions engines. Magnetic engine oil drain plug captures and holds any metal fragments in engine oil to extend service life. N21320 N205 120...Standard Maximum Speed Limit N21470 P062 NO....Cruise Control Auto Resume (N21480 P068 NO....Auto Engine Brake in Cruise N21450 P026 NO....Gear Down Protection (P026) N21440 P015 NO....Engine Protection Shutdown (N21350 P001 70....Maximum Accelerator Pedal Ve N21370 P059 70....Maximum Cruise Speed (P059) N21590 P230 YES...Enable Hot Ambient Automatic N21530 P233 YES...Enable Impending Shutdown Wa N21540 P234 60....Timer For Impending Shutdown N21460 P046 1400..Max PTO Speed (P046) N21520 P030 5.....Timer Setting (P030) N21570 P031 NO....Idle Shutdown Manual Overrul N21610 P172 40....Low Ambient Temperature Thre N21630 P171 80....High Ambient Temperature Thr N21510 P520 YES...Enable Idle Shutdown Park Br N21430 N201 0.....Reserve Speed Limit Offset (N21410 N202 0.....Maximum Cycle Distance (N202 N21400 N203 252...Reserve Speed Function Reset N21420 N206 10....Maximum Active Distance (N20 N21340 P112 120...Hard Maximum Speed Limit (P1 N21550 P516 35....Engine Load Threshold (P516) | -540 |
|---------|---|--|------|

Price Level: January 1, 2020

Deal: Nixon 337 2020 PL

Printed On: 7/12/2019 11:36:29 AM

Date: July 12, 2019

Quote Number: QUO-510509-B4W8F1



| Sales Code | Std/ Opt | Description | Weight |
|------------|----------|--|--------|
| | | N21620 P173 60....Intermediate Ambient Tempera N21330 N207 0.....Expiration Distance (N207) N21500 N209 0.....Expiration Distance (N209) | |
| 2091310 | O | Engine Idle Shutdown Timer Disabled | 0 |
| 2091315 | O | Enable EIST Ambient Temp Overrule | 0 |
| 2091372 | | Eff EIST NA Expiration Miles | 0 |
| 2091640 | | Effective VSL Setting NA | 0 |
| 2140200 | S | CARB Engine Idling Compliance PACCAR PX-7, PX-9 and MX, Cummins X15 and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard. | 0 |
| 2513060 | S | PACCAR 160 Amp Alternator, Brushed PACCAR 160 AMP alternator, brushed producing 160 Amps at road speed and 100 Amps at idle. | 0 |
| 2522110 | S | PACCAR 12V Starter, N/A PACCAR MX Engines PACCAR 12-volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded. | 0 |
| 2538030 | S | 2 PACCAR Premium 12V Starting Batteries 2000 CCA Threaded stud type terminal. Stranded copper battery cables are double aught (00) or larger to reduce resistance. | 0 |
| 2539700 | O | Battery Jumper Terminal Mtd under hood RH frame rail. Available with PX-7 engines only. | 4 |
| 2539740 | O | Kissling Battery Disconnect Switch, 300 amp Mounted on battery box | 3 |
| 2621000 | O | 2-Speed Fan Clutch For Frequent Start/Stops A 2-speed fan clutch is ideal for vocational applications where the fan clutch engagement time exceeds 10% of the engine run time. When the fan clutch is disengaged, the fan still rotates at 15-25% of the engine RPM. This fan rotation provides crucial airflow to the engine and draws virtually no horsepower. | 0 |
| 2723210 | S | 18.7 CFM Air Compressor N/A X15. Furnished on engine. Teflon lined stainless steel braided compressor discharge line. | 0 |
| 2812210 | O | VGT Exhaust Brake (Variable Geometry Turbo). Provides approximately 90-100 HP of retardation and is part of the turbocharger. | 0 |
| 2921160 | S | Spin-On Fuel/Water Separator | 0 |
| 2921210 | S | No Fluid Heat Option for Fuel Filter | 0 |
| 2921310 | S | No Electric Heat Option for Fuel Filter | 0 |
| 3114270 | S | High Efficiency Cooling System | 0 |

Price Level: January 1, 2020

Deal: Nixon 337 2020 PL

Printed On: 7/12/2019 11:36:29 AM

Date: July 12, 2019

Quote Number: QUO-510509-B4W8F1



| Sales Code | Std/Opt | Description | Weight |
|-------------------------------------|---------|---|--------|
| | | Cooling module is a combination of steel and aluminum components, with aluminum connections to maximize performance and cooling capability. Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. ClimaTech extended life coolant extends maintenance intervals which reduces maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 579/367 FEPTO 1325 sq in, 567/365/367: 1440 sq in, 365 FEPTO: 1184 sq in, 389/367 HH: 1669 sq in, 348: 1000 sq in, 520: 1242 sq in. | |
| 3211120 | S | Radial Seal, Dry Type Air Cleaner, Frontal Air Intake. Molded rubber air intake connections with lined stainless steel clamps seal to prevent contaminants in air intake. | 0 |
| 3365270 | O | Exhaust Single RH Side of Cab DPF/SCR right-hand Under Cab (2017). | 29 |
| 3387610 | O | 18" Ht, 5" Dia Chrome, Clear Coat Standpipe(s) | -2 |
| Transmission & Equipment | | | |
| 4052110 | O | Allison 3000 RDS-P Transmission, Gen 5 Rugged Duty Series. Includes Rear Transmission Support except on MX engines, TranSynd Automatic Transmission Fluid, and Water-Oil Heat Exchange. Also includes features that monitor the transmission fluid, filter and clutch condition. Will display percent life remaining for the transmission fluid, filter and clutches on the shift selector. This information may be displayed using the Mode and Up and Down buttons. A wrench icon will also be included to indicate when the transmission fluid, filter or clutches need servicing. Suited for vehicles operating on/off highway and/or requiring PTO operation. Forward ratios: 1st-3.49, 2nd-1.86, 3rd-1.41, 4th-1.00, 5th-0.75, 6th-0.65. Reverse ratios: DR-(5.03). | 195 |
| 4210080 | S | 1710 HD Driveline, 1 Midship Bearing | 0 |
| 4233030 | O | (1) Dash Mounted Single Acting Air PTO Control Standard with PTO engaged indicator light on Class 8 units. Occupies the space of one gauge. Specing PTO switch does not ensure the PTO will fit. | 0 |
| 4252890 | O | Allison FuelSense 2.0 Not Desired | 0 |
| 4252950 | O | Omit Allison Neutral At Stop | 0 |
| 4256640 | O | Allison 6-Speed Configuration, Close Ratio Gears 3000 Series Transmissions | 0 |
| 4256920 | O | Dash Mounted Push Button Shifter Available with Allison transmissions | 0 |
| Air & Trailer Equipment | | | |
| 4510330 | O | Bendix AD-IS EP Air Dryer, Heater Coalescing filter, extended purge | 6 |
| 4520420 | O | Pull Cords All Air Tanks | 0 |

Price Level: January 1, 2020
Deal: Nixon 337 2020 PL
Printed On: 7/12/2019 11:36:29 AM

Date: July 12, 2019
Quote Number: QUO-510509-B4W8F1



| Sales Code | Std/Opt | Description | Weight |
|---------------------------|---------|--|--------|
| 4540420 | S | Nylon Chassis Hose | 0 |
| 4543320 | S | Steel Painted Air Tanks All air tanks are steel with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed. | 0 |
| 4611930 | O | Body Connections 5' BOC Junction box contains light and power circuits for body connections located 5' from back-of-cab | 4 |
| 4612800 | O | Trailer Hand Valve, Column Mounted Controls | 11 |
| 4612900 | O | AE Connection EOF, 7-Way Socket, Connection EOF Strapped to the rail | 15 |
| Tires & Wheels | | | |
| 5006870 | O | FF: YO 16Ply 11R22.5 RY023 Diameter = 41.4 inches; SLR = 19.3 inches | 0 |
| 5106740 | O | RR: YO 14Ply 11R22.5 703ZL Diameter = 42.3 inches; SLR = 19.7 inches | 0 |
| 5190004 | O | Code-rear Tire Qty 04 | 0 |
| 5211990 | S | FF: Accu-Lite Steel Armor 51408PK 22.5X8.25 PHP10-2 hand holes | 0 |
| 5311990 | S | RR: Accu-Lite Steel Armor 51408PK 22.5X8.25 PHP10-2 hand holes | 0 |
| 5390004 | O | Code-rear Rim Qty 04 | 0 |
| Fuel Tanks | | | |
| 5556040 | O | 26" Aluminum 50 Gal Fuel Tank LH BOC Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks. | 117 |
| 5604050 | O | Location LH BOC 50 Gallon | 0 |
| 5652840 | O | Locking Fuel Tank Cap(s) | 0 |
| 5652890 | S | DEF Tank Mounted LH BOC Models 220 and 520 mounted left-hand cab fender | 0 |
| 5652990 | S | Standard DEF to Fuel Ratio 2:1 Or Greater | 0 |
| 5655019 | O | DEF Tank Small | 0 |

Price Level: January 1, 2020
Deal: Nixon 337 2020 PL
Printed On: 7/12/2019 11:36:29 AM

Date: July 12, 2019
Quote Number: QUO-510509-B4W8F1



| Sales Code | Std/Opt | Description | Weight |
|---------------------------------|---------|---|--------|
| Battery Box & Bumper | | | |
| 6010030 | O | Aluminum Battery Box LH Under Cab, Non-Slip Step Includes diamond pattern block shaped cover in traditional/vocational models and a smooth finish tapered cover on aerodynamic models | -55 |
| 6034620 | O | Heavy Duty Battery Box Step Reinforcement | 2 |
| 6040550 | S | Aftertreatment Aluminum Non-Slip Cab Entry Aftertreatment right-hand under cab step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box is aerodynamic. | 0 |
| 6121180 | S | Steel Styled Aero Bumper Painted Cab Color Two tow pins | 0 |
| Cab & Equipment | | | |
| 6510110 | S | Alum Cab 108in BBC Metton Hood w/Bright Crown Includes view window RH door and convex mirror over RH door. | 0 |
| 6540160 | O | Thermal Insulation Package in Cab Includes thick, closed-cell foam in floor, special mylar-faced foam in walls and roof structure. | 2 |
| 6540720 | O | 10" Extension for Ultra Day Cab Add additional 10" to the loadspace dimension-- refer to the horizontal dimension workscreen. | 163 |
| 6911700 | S | Peterbilt UltraRide Driver Seat | 0 |
| 6921700 | O | Peterbilt UltraRide Passenger Seat | 0 |
| 6930500 | O | Drivers Armrest - RH Only | 2 |
| 6930590 | O | Passenger Armrest - LH only Required with Evolution LX seats, optional with Evolution ST Seats. | 2 |
| 6930800 | O | Black Seat Color IPO Standard Color | 0 |
| 6939400 | O | Air Ride Driver | 0 |
| 6939440 | O | Low Back Driver | 0 |
| 6939470 | S | Vinyl Driver | 0 |
| 6939500 | O | Air Ride Passenger | 43 |
| 6939540 | S | Low Back Passenger | 0 |
| 6939570 | S | Vinyl Passenger | 0 |
| 7001520 | O | Adjustable Steering Column - Tilt/Telescope | 11 |
| 7001620 | S | Steering Wheel With Peterbilt Logo Steering Wheel with embossed Peterbilt logo over horn button. | 0 |

Price Level: January 1, 2020

Deal: Nixon 337 2020 PL

Printed On: 7/12/2019 11:36:29 AM

Date: July 12, 2019

Quote Number: QUO-510509-B4W8F1



| Sales Code | Std/Opt | Description | Weight |
|------------|---------|---|--------|
| 7036120 | S | Interior Grey/Black Includes rugged charcoal instrument panels, glare-resistant gray dash, black bezels on gauges, (2) power ports, monochromatic molded door pads with durable in-mold color, gray molded back wall, 18 inch 4-spoke soft-touch steering wheel, soft-touch steering column cover, power lift passenger window, extruded rubber floor covering, header-mounted dome light, foot well lighting, integrated "dead pedal", (4) inside entry grab handles, (2) inside sunvisors, (2) coat hooks, (2) cup holders and map bin in dash. | 0 |
| 7210420 | O | Dark Window Tint IPO Standard Tint - Day Cab | 0 |
| 7210540 | S | Day Cab Rear Window | 0 |
| 7230060 | S | 1-Piece Curved Windshield | 0 |
| 7322010 | S | Combo Fresh Air Heater/Air Conditioner With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses. | 0 |
| 7410040 | O | Outside Sunvisor - Stainless Steel Not available with 2.1M high roof sleeper. | 4 |
| 7560100 | O | Mirrors SSTL Each Side Heated and Motorized with Switch on Door. | 2 |
| 7560850 | O | (2) Convex 8 Inch SSTL Mirrors Center mounted under mirror bracket. If rear view mirrors are heated, the convex mirrors will be heated. Option includes dual door stops. | 4 |
| 7564110 | S | Power Package Includes power door locks and power windows. | 0 |
| 7610020 | O | (1) Air Horn 15" Painted Mounted under cab. | 8 |
| 7725710 | O | Standard Speaker Package For Cab (2) Speakers | 4 |
| 7725715 | O | ConcertClass Without CD, Includes BT Phone and Audio, AM/FM, WB, USB and MP3. | 10 |
| 7748140 | O | CB Terminals/Wiring Mounted Under Header | 0 |
| 7748300 | O | (1) 48" CB Antenna | 1 |
| 7748510 | O | CB Antenna Mounting, RH Mirror Available with Rami only on 1.9m, available without Rami on medium duty | 1 |
| 7850210 | O | Plug-In Auto Reset Circuit Breaker in place of fuses in junction box. | 0 |
| 7851480 | S | Peterbilt Electric Windshield Wipers With Intermittent Feature. | 0 |
| 7851780 | O | CabMate Cab Air Suspension | 15 |



| Sales Code | Std/Opt | Description | Weight |
|--------------|---------|--|--------|
| | | Mfg by Link. The class 8 conventionals (except Model 348) includes (2) airbags, (2) shock absorbers, (1) leveling valve, radius rod, and height limiter. The Models 330, 337, and 348 includes (1) airbag and (1) shock absorber. | |
| 7900090 | O | Triangle Reflector Kit, Ship Loose Florescent triangle emergency road flares are designed to meet and exceed all DOT standards. | 13 |
| 7900270 | O | Fire Extinguisher, Cab Mounted Hazmat approved UL listed/rated ABC | 8 |
| 7901130 | O | Backup Alarm (107 DB) | 3 |
| 8011400 | O | Main Transmission Oil Temperature Gauge Located in Driver Information Display | 0 |
| 8021380 | S | Air Restriction Indicator Mounted on air cleaner, intake piping, or firewall | 0 |
| 8071340 | O | Bright Bezel Gauges | 0 |
| 8071510 | O | (1) Additional Electric Switch Without Wiring | 0 |
| 8071870 | S | Main Instrumentation Panel, Graphics Display Includes speedometer with trip odometer, tachometer with hourmeter and outside air temperature display, voltmeter, engine oil pressure, engine coolant temperature, fuel level, primary and secondary air pressure gauges. Includes standard warning light package: high water temperature, low oil pressure, and low air pressure warning lights with audible alarms, high beam, turn signal, low fuel, parking brake, and ice warning indicators; seat belt reminder; rocker switches with long-life LED indicators; multi-function turn stalk with flash-to-pass feature (night mode flashes headlights and marker lights; day mode flashes headlights only), intermittent windshield wiper and headlamp beam control. Hydraulic braked trucks do not include air pressure gauges. | 0 |
| 8111110 | S | Headlights Composite Fender Mounted Integral park, turn, and side marker | 0 |
| 8120980 | S | (5) Marker Lights, Aero LED | 0 |
| 8133900 | O | None Furnished Stop/Tail/Backup Lights Available with full truck only, not available with tractor | -16 |
| 8134070 | O | (2) Additional Dome/Reading Lights, Ceiling Mtd | 0 |
| 8153100 | O | (1) F/O Load Light, Switch, 10' Wire Coil Under / in cab / sleeper baggage compartment | 2 |
| Paint | | | |
| 8500710 | O | Standard Paint Color Selection | 0 |
| 8530770 | S | (1) Color Axalta Two Stage - Cab/Hood Base Coat/Clear Coat N85020 A - L0006EY WHITE N85700 BUMPER L0006EY WHITE N85500 CAB ROOF L0006EY WHITE | 0 |

Price Level: January 1, 2020

Deal: Nixon 337 2020 PL

Printed On: 7/12/2019 11:36:29 AM

Date: July 12, 2019

Quote Number: QUO-510509-B4W8F1



| Sales Code | Std/ Opt | Description | Weight |
|------------|----------|-------------------------------|--------|
| | | N85300 FENDER L0006EY WHITE | |
| | | N85200 FRAME L0001EA BLACK | |
| | | N85400 HOOD TOP L0006EY WHITE | |

Shipping Destination

| | | | |
|---------|---|---|---|
| 8999990 | O | Shipping Destination Other Than Dealer (Specify by narrative) | 0 |
|---------|---|---|---|

Options Not Subject To Discount

| | | | |
|---------|---|---|---|
| 9400091 | S | Peterbilt Class 7 Standard Coverage 1 year/Unlimited Miles/km | 0 |
| 9400093 | O | PACCAR PX-7 Standard Coverage 3 years/Unlimited Miles/Unlimited hrs | 0 |
| 9408982 | O | Vehicle Layout Option is not subject to discount. Fleets will be split prior to build so that the charge is applied to only one unit. Quotes will not reflect this. <i>Narr Dane dlamanna@coastcounties.com Clear outside frame rail LH/RH</i> | 0 |

Miscellaneous

| | | | |
|---------|---|--|---|
| 9409800 | O | 2017 EPA Emissions Engine Warranty Only | 0 |
| 9409869 | O | Presentation Created With SmartSpec | 0 |
| 9409960 | O | Presentation Created Using Featured Spec For Model | 0 |

Promotions

Order Comments



Total Weight

10,726

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information