CITY OF SALINAS

2023 Pavement Management Program Update

Draft Report

September, 2023

Pavement Engineering Inc.

You can ride on our reputation

Table of Contents

Section Description

I. Executive Summary
- Introduction
- Work Performed
- Findings
- Budget Analysis
- Conclusions and Recommendations

II. Background
- Pavement Design Basics
- Pavement Deterioration
- Typical Pavement Defects
- Pavement Maintenance Procedures
- Pavement Rehabilitation Procedures

III. Pavement Management Program Specifics
- Background (StreetSaver®)
- Program Assumptions
- Program Inventory
- Pavement Maintenance & Rehabilitation (M&R) Units Costs
- Annual Pavement Maintenance Rehabilitation Program
- Visual Evaluations
- Program Reports
- Program Updates

IV. Reference Reports
- Street List Alphabetical
- Street List by PCI (High to Low)

Maps:
1. Current Pavement Condition
2. Functional Class
3. Current Pavement Condition (Good & Fair Only)

Appendix A Summarized System Information
- Network Summary Statistics
- Network Replacement Cost
- Decision Tree

Appendix B Budget Scenarios

5 Year:
- Needs / Zero Budget
- Increase PCI By 5
- Maintain PCI
- Current Funding
- Increased Funding

10 Year:
- Target PCI's (Arterials 75, Collectors 65)
- Target PCI's (Arterials 75, Collectors 65, Residentials 50)

Appendix C Definitions

Section I
Executive Summary

EXECUTIVE SUMMARY

The City of Salinas currently maintains approximately 292 centerline miles of roads, or 62,289,734 square feet of pavement. The 292 miles of roads have an estimated replacement value of approximately $1.1 Billion, and a back log of deferred maintenance of $343 Million, as calculated by StreetSaver®.

Pavement Engineering Inc. (PEI) updated all the City's Arterial, Collector, and Residential Streets in the City's Pavement Management Program, using the Metropolitan Transportation Commission's (MTC) StreetSaver® program. The purpose of a Pavement Management Program is to track inventory, store work history and furnish budget estimates to optimize funding for improving the city's pavement system.

INTRODUCTION

A Pavement Management Program has several distinctive uses:

- As a budgeting tool, a Pavement Management Program uses treatment costs that are based on recently bid projects, by the participating agency, so that budgets reflect historical costs for the area.
- As an inventory tool, a Pavement Management Program provides a quick and easy reference for pavement areas and use.
- As a pavement condition record, a Pavement Management Program provides age, load-related, non-load related and climate-related pavement condition and deterioration information. The Pavement Management Program uses pavement deterioration curves, based on nationwide research, which allow the program to predict a pavement's future condition.

A Pavement Management Program is not capable of providing detailed engineering designs for a street. The Pavement Management Program instead helps the user identify candidate streets for potential repair and maintenance. Project level pavement analysis and engineering is an essential feature of future pavement maintenance and rehabilitation projects. Additional investigation, or project level analysis, can optimize the City's pavement management dollars. Project level engineering examines the pavements in significantly more detail than the visual evaluation required for the Pavement Management Program Update and optimizes designs for all of the peculiar constraints of a set of project streets.

WORK PERFORMED

Pavement Distress Survey and Database Update

For this update, PEI performed inspections on all 291.96 centerline miles of city-maintained roadways. 51.19 centerline miles of Arterial streets, 46.59 centerline miles of Collector streets, and 194.16 centerline miles of Residential streets. Additionally, PEI reviewed 0.14 centerline miles of gravel roads, these 2 gravel segments are currently part of the City's maintained road network, but pavement has not been installed. As part of our Pavement Management Program review, the segmentation of each street was examined. This resulted in some segments being split, or combined, as well as the reassignment of segment data to be in one of the six (6) City Council Districts. The Functional Classification of each segment was also review and compared to The California Road System (CRS) data that Caltrans maintains.

PEI measured the following distress types as part of our review: Alligator cracking (fatigue), Block cracking, Distortions, Longitudinal & Transverse cracking, Patching & Utility cuts, Rutting/ Depressions, Raveling, and Weathering. All the collected data was entered into the City's StreetSaver® database. Field inspections were completed in March of 2023.

As part of our field review, all the streets were measured to confirm lengths and widths. Lengths were measured using a vehicle-mounted electronic measuring device and widths were measured using a hand-held measuring wheel. Measurement discrepancies were tabulated and reviewed with the City to determine if corrections were needed.

PEI performed a quality control (QC) check on our work. PEI's QC check consists of performing a field review of any street segment where the PCI showed a decrease of 3 or more points per year, or an increase of 1 PCI without a documented M&R treatment, when compared to the last inspection for the same road segment in the StreetSaver® database. Each segment in the QC process was visually reviewed to determine if the StreetSaver® calculated PCI was representative of the observed overall pavement condition for that road segment. Variations found were re-inspected by a Senior Engineering Technician, or the Project Manager, and the segments' PCI was recalculated.

FINDINGS

The updated Pavement Management Program showed that the City's overall average PCI is **53**.

The breakdown by functional classification is as follows:

Functional Classification	Centerline Miles	Lane Miles	Area (sq. ft.)	Percent of System	Average PCI
Arterial	**51.19**	**177.46**	**16,532,622**	**26.54%**	**62**
Collector	**46.59**	**106.97**	**10,432,527**	**16.75%**	**52**
Residential	**194.16**	**388.15**	**35,324,361**	**56.71%**	**49**
Totals	**291.94**	**672.57**	**62,289,510**	**100%**	**53**

Refer to Map #2 in Section IV for a City Map by Functional Classification

The breakdown by Condition Category and corresponding PCI range is shown below:

Condition Category Breakdown			
Condition	**PCI Range**	**Square Feet**	**% Of Total**
Excellent	91-100	1,322,813	2.12%
Good	71-90	16,615,184	26.67%
Fair	51-70	14,893,509	23.91%
Poor	31-50	17,475,772	28.06%
Failed	0-30	11,982,232	19.24%

Refer to Map #1 in Section IV for a City Map by PCI Condition Category

The analysis shows that **50.6%** of the City's pavements are in **Good** to **Fair** condition. Details of each street segment are provided in ***Section IV: Reference Reports***.

The pie graph below shows the percentage of each functional classification, by area.

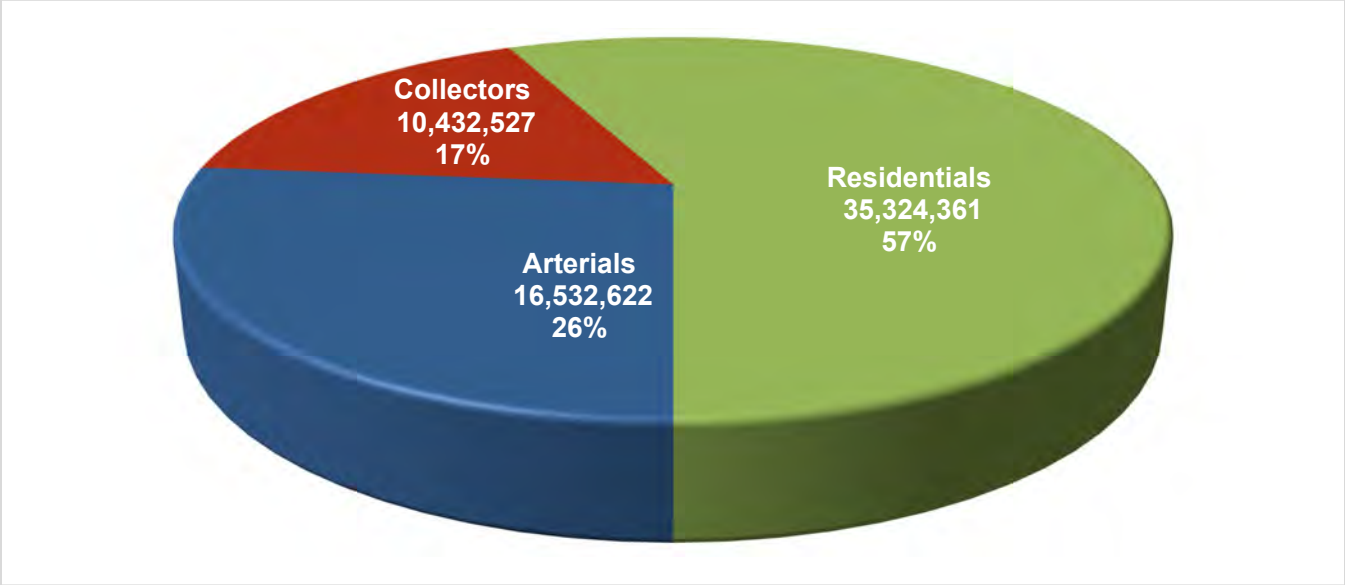

The bar graph below shows the City's street system broken down into 10-point PCI ranges.

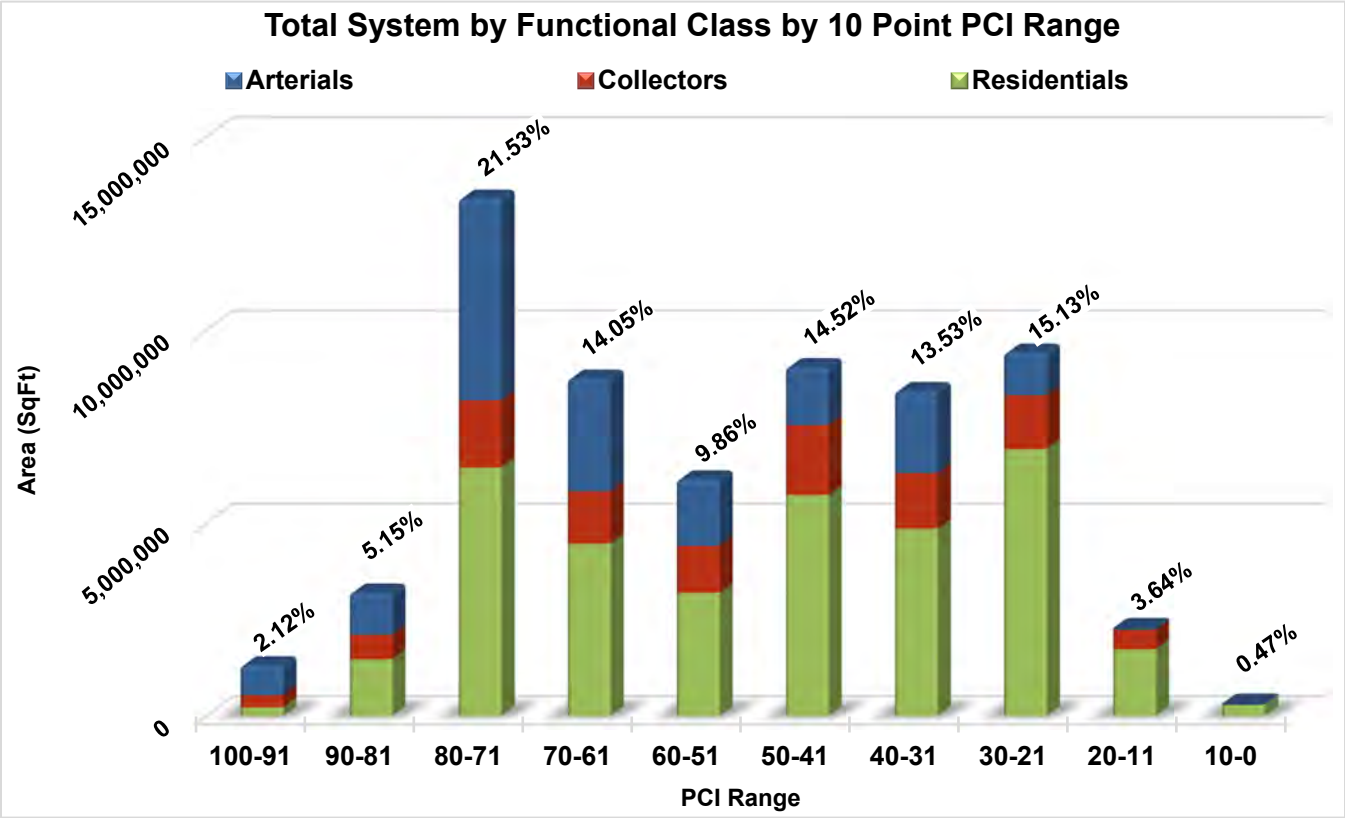

BUDGET ANALYSIS

StreetSaver® uses a decision tree to model the decision-making process that agencies follow to select a maintenance or rehabilitation strategy. The decision tree contains "branches" for each functional classification, surface type and condition category. Jurisdictions can outline their maintenance and rehabilitation strategy by choosing a treatment for each branch.

StreetSaver® assigns a treatment action and estimated cost to each street segment based on the pavement's current PCI. The PCI range of 0 to 100 is broken down into five condition categories for budget calculation purposes. StreetSaver® default PCI breakpoints were used during the update of The City's Pavement Management Program.

The breakpoints are as follows:

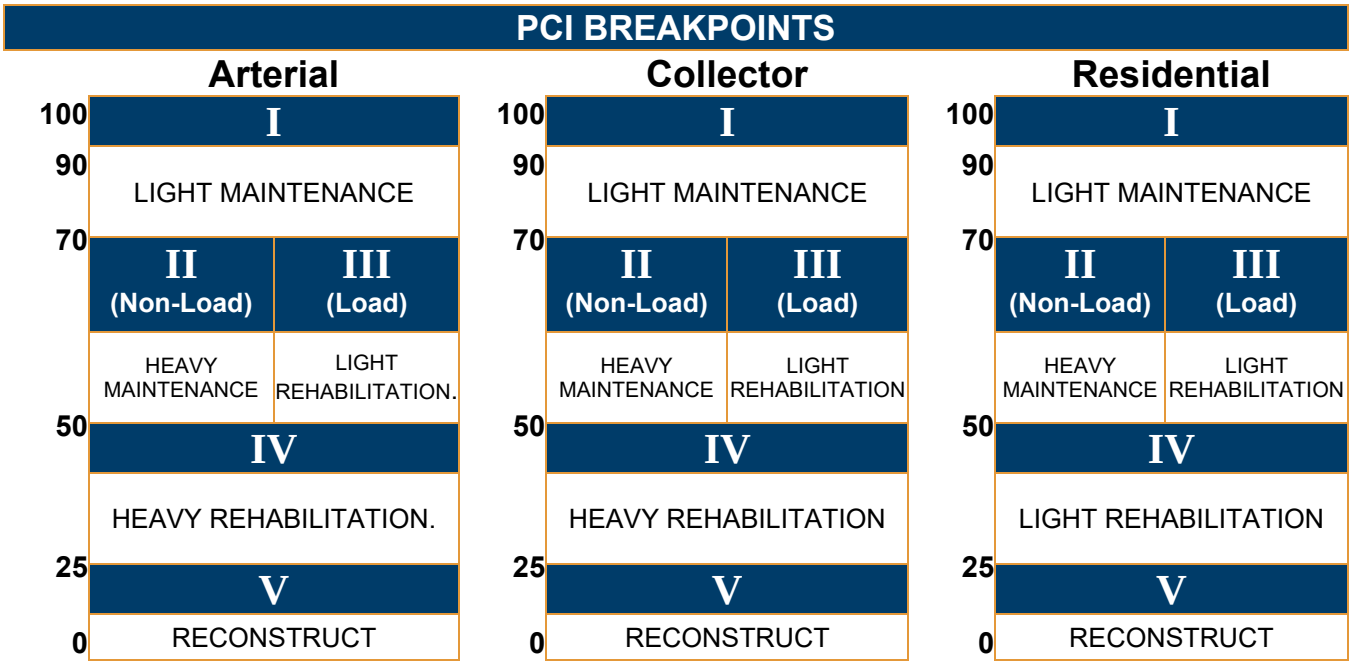

The treatments listed in the decision tree are generalized to provide a range of treatments. Typical treatments within each generalized treatment range are listed below. The exact treatment would need to be determined during the design phase of the project.

Treatment Category	Typical Treatment
Light Maintenance	• Slurry Seal or Micro-Surface • Fog Seal or Scrub Seal
Heavy Maintenance	• Chip Seal, Cape Seal • Slurry Seal or Micro-Surface with Digouts • Thin Maintenance Overlay (TMO)
Light Rehabilitation	• Overlay (2" and under) or Thin Mill and Fill
Heavy Rehabilitation	• Overlay (greater than 2") or Thick Mill and Fill • Cold-In-Place Recycling • Full Depth Reclamation • Pulverize and Resurfacing
Reconstruct	• Full Section Reconstruction

Decision Tree Unit Prices

As a minimum, recent bid tabulations should be used to determine the appropriate unit costs for each general treatment category. Furthermore, the unit costs should be whole or complete costs and include other costs that may be incurred during the process of a pavement maintenance, or rehabilitation project. This ensures that the budget projections in StreetSaver® are conservative. First, a 15% increase was applied to account for curb ramp upgrades that may be triggered by a treatment. Then, an increase of 15% was applied to the unit cost to account for "Soft costs", or items such as design, construction management, and materials testing. Additionally, an increase of 10% was applied to the unit costs as a general contingency. These all come together to form a more comprehensive unit cost for the selected treatments.

For the City of Salinas, the unit costs on the following table were used:

Treatment	Arterial	Collector	Residential
Cost/ Sq Yd			
Crack Seal ($/LF)	$1.56	$1.25	$1.25
Light Maintenance	$5.63	$5.63	$5.63
Heavy Maintenance	$13.86	$12.60	$12.60
Light Rehab	$50.40	$44.10	$44.10
Heavy Rehab	$104.71	$91.35	$75.60
Reconstruct	$176.40	$163.80	$151.20

For this update, PEI analyzed several scenarios, which are summarized below:

Budget Scenario Projections

PEI generated Five (5) scenario projections which are represented graphically below:

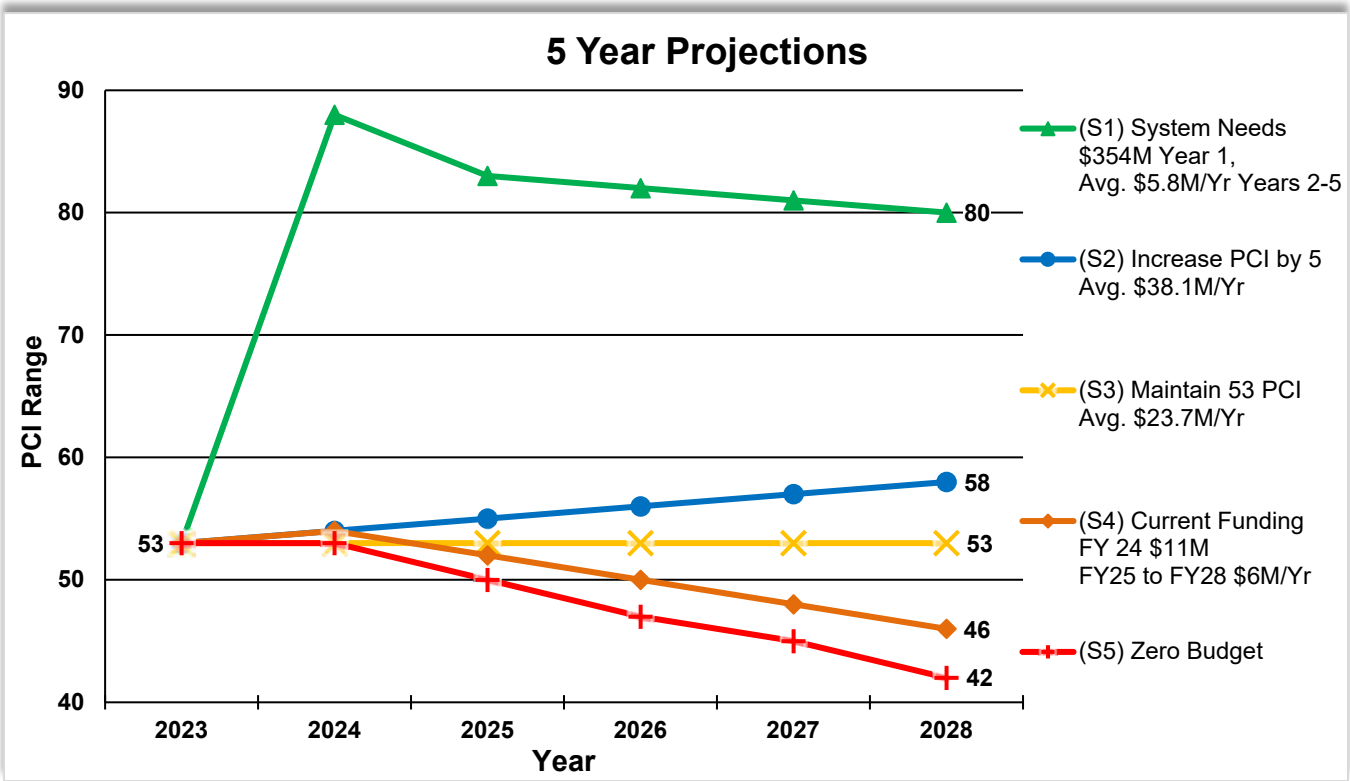

A summary of each of the scenario projections are as follows:

Scenario 1: Amount of funding estimated to fulfill the overall system Needs. ($354M for Year 1, Average $5.8M/Yr. for Years 2-5)

Scenario 2: Amount of funding estimated to Increase the system PCI by 5 (Average of $38.1 Million per Year)

Scenario 3: Amount of funding estimated to Maintain an overall system PCI of 53 (Average of $23.7 Million per Year)

Scenario 4: Projected system PCI with Current Funding of $11 million for FY 24 and $6 Million per Year for FY 25 – FY 28, Results in an seven (7) point PCI drop to 46.

Scenario 5: Represents the impact to the PCI if Zero dollars are spent

Additionally, we ran a 5-year scenario that showed the impact to the city's PCI if the Current Funding amount was increased to $10 million per year for FY 25 and FY 26. The graph below compares that scenario to the Current Funding represented by Scenario 4.

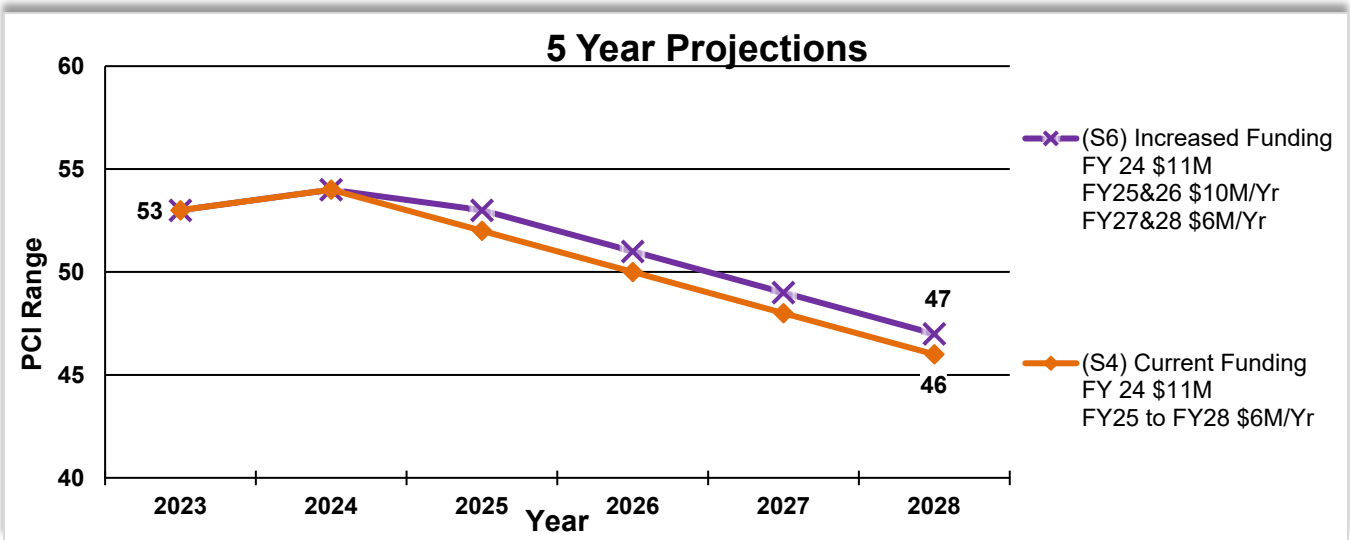

Lastly, we ran 10-year scenarios (S7) and (S8). Scenario 7 shows the annual cost to reach a Target PCI of 75 for the City's Arterial Streets and a Target PCI of 65 for the City's Collector Streets, while not touching the Residentials. Scenario 8 shows the annual cost to reach those same PCI targets (75 for Arterials, and 65 for Collectors) while maintaining the residentials streets at their current PCI of 50 for that 10-year time frame. The graph below shows the effect this would have on the city's overall PCI.

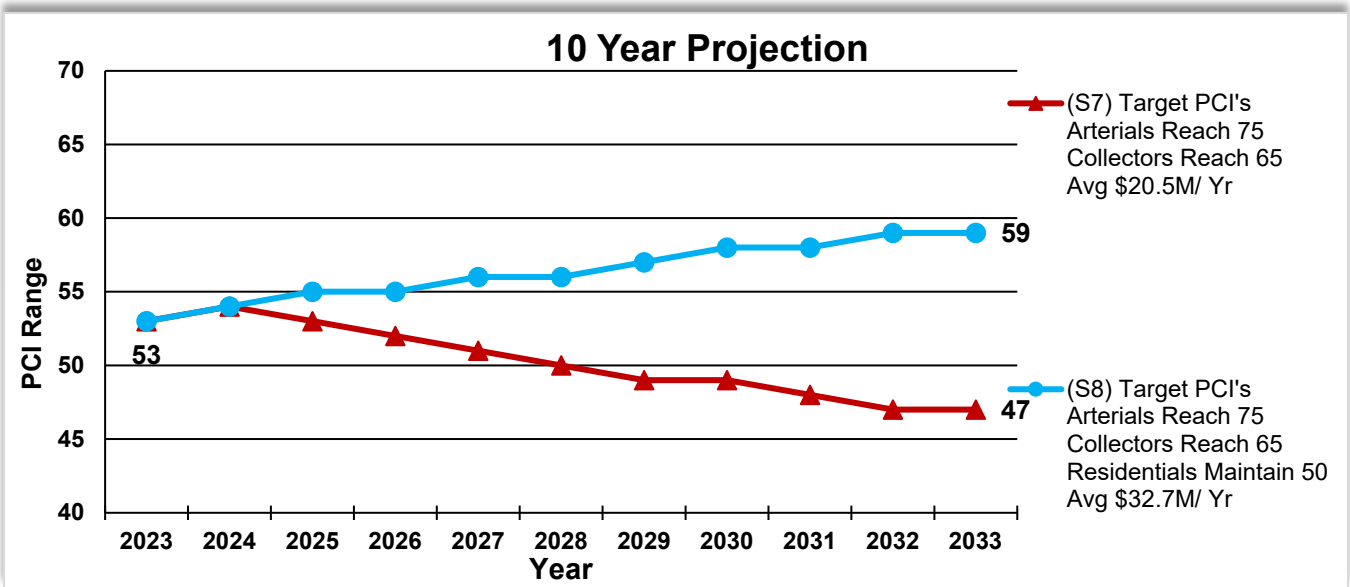

The full report for the various budget scenarios can be found in **Appendix B**.

Budget Consequences

The following graph illustrates the consequence to the City's overall weighted PCI and Deferred Maintenance Amount, based on the Current Funding scenario projection:

At the current funding level of $11 million for FY 24 and $6 million annually for FY 25 to FY 28, the PCI of the entire system will deteriorate from 53 to 46, an eight (7) PCI point drop over the next 5 years. In addition, the backlog of deferred maintenance inflates from $343 million to $481 million, an increase of 40%.

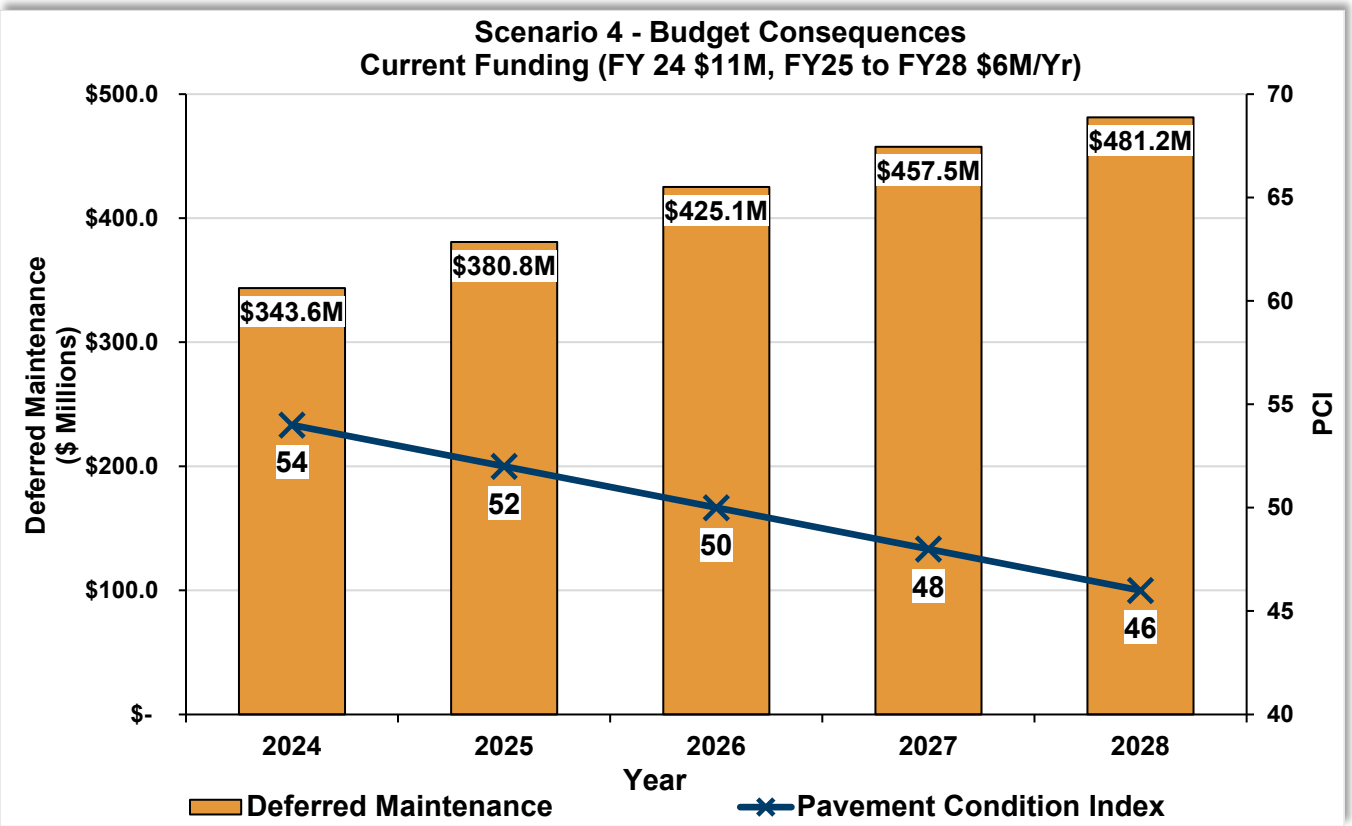

CONCLUSIONS AND RECOMMENDATIONS

This Executive Summary provides a review of the 2023 Pavement Management Program Update performed by PEI. PEI inspected all Arterial, Collector, and Residential road segments in the City of Salinas during the Winter of 2023. The average overall PCI for the City is **53**. **50.6%** of the City's pavement is in **Good to Fair** condition. To maintain the system at its current overall PCI of 53, the City will need to spend an estimated average of $23.7Million annually over the next 5 years. Maintaining the current funding level of $11 million for FY 24 and $6 million annually for FY 25 to FY 28, a seven (7) PCI point drop is expected over the next 5 years and will result in the PCI of the entire system to deteriorate from 53 to 46.

Moving forward, PEI recommends the City carefully evaluate the condition and service level desired of their street system. Especially, when considering the overall annual budget, it wants to commit to pavement maintenance and rehabilitation projects.

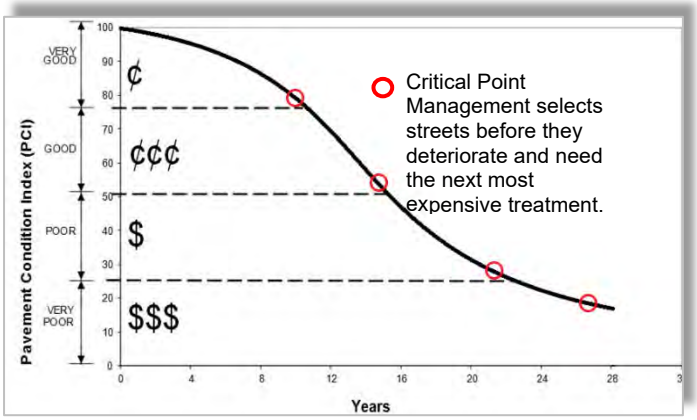

We recommend the City set priorities for their pavements, based on a “Critical Point” pavement management strategy. Critical Point Management, focuses maintenance and rehabilitation on streets that are at a critical point on their deterioration curve, where if the correct treatment is applied it will keep the pavement from falling into a condition where the correct treatment is more costly (see Section III for more details on pavement management strategies). This will generally mean that the streets being selected to be treated should come from each of the condition categories; Good, Fair, Poor, and Failed.

It will be important for the City to address the 50.6% of the overall system that currently have a PCI in the Good to Fair Condition category (refer to Map 3, in Section IV of the report). That 50.6% breaks down into 26.7% in the Good Category (PCI 90-71), and 23.9% in the Fair Category (PCI 70-51). The city has already invested in improving these streets and they now need to be maintained.

To maintain a healthy pavement network, it is imperative to keep the pavements that are in the Good Category (PCI 90-71) in that condition. These pavements are in a position where Strategic Maintenance Treatments will keep these pavements from falling from the Good category to the Fair category, where the cost to apply the right treatment goes from approx. $0.73 Sq./Ft. (average Light Maintenance treatment costs) to $3.3 Sq./Ft. (average of Heavy Maintenance and Light Rehab treatment costs).

The pavements in the Fair Category (PCI 70-51) should be considered “At-Risk”. If these segments are left untreated, they will deteriorate and cause a large decrease of the overall Network condition. These Segments will require careful monitoring to ensure that maintenance treatments on these sections are performed before these sections fall into the next treatment category. This strategy would keep these pavements from falling into the Poor category, where the cost to apply the right treatment goes from approx. $3.30 Sq./Ft. (average between Heavy Maintenance and Light Rehab treatment costs) to $10.06 Sq./Ft. (average Heavy Rehab treatment cost).

To address the 28% of Street system that are in the Poor category will be key in the improvement of the overall network health and system PCI. This can be a financially daunting task, as the correct rehabilitation treatments for streets below 50 PCI are more costly than maintenance treatments, but when done right they will last much longer and be less expensive to maintain over time. In lieu of a significant increase in the pavement maintenance budget, it is recommended that the City attack the streets in the Poor category with aggressive Stop-Gap measures. This strategy will address the failed areas and keep those streets from joining the 19% of the system in the Failed Category, until suitable funding is secured to address the budget shortfall.

This Pavement Management Program will assist the City in its efforts to monitor treatments and track their effectiveness, as well as, help the City in setting future priorities and treatment policies. As the City maintains and updates its Pavement Management System, the program will become a valuable tool in its efforts to maximize performance and minimize the spending for pavements.

Section II
Background

BACKGROUND

This section is intended to introduce important pavement design definitions and calculations as a background for understanding the Pavement Management Program (PMP) assumptions.

PAVEMENT DESIGN BASICS

Pavements are a structural support system generally considered to act like a beam. But unlike beams in buildings, which generally have static loads, the pavement structure is flexed many times from traffic loading. Cars and light trucks have little impact on the pavement structure. Larger/Heavier trucks have very significant impacts on the pavement due to the high axle weights. The impact of trucks is measured in equivalent single 18,000-pound axle loads (EALs). The total EALs are converted into a design Traffic Index (TI). As an example, a design TI of 5 is equal to 7,160 EALs. A Design TI of 8 is equal to 372,000 EALs. Therefore, the design TI is the total number of EALs that the pavement will support before it begins to fail, regardless of the passage of time. Normally for a new pavement, the EALs over a 20-year period are used. For rehabilitation treatments such as overlays, 10 years is generally used.

The other element of pavement design is the support of the beam. The support is provided by the sub-grade soils. The support value is designated by the R-value test.

Using the design TI and R-value, the pavement designer chooses various materials to construct the structural section. The most common pavement section is a thin layer of asphalt concrete over aggregate base(s). Many options are available depending on specific project requirements and conditions.

The Design Life of a pavement is the period of time that a pavement is engineered, or planned, to perform at a satisfactory level. The Service Life of a pavement is the actual amount of time that a pavement performs at that satisfactory level. The design methods used in California are based on a 50 percent reliability rate. So, the average service life, of all pavements constructed using those design procedures, will be the design life. This generally means that about half of the pavements will not last the full design life and the other half will last longer than the design life. Therefore, the expected service life of a pavement is generally expressed in a range of years. For a pavement with a 20-year design life, the expected service life of that pavement will be 17 to 23 years.

PAVEMENT DETERIORATION

Pavement deteriorates from two processes, **Fatigue** and **Aging**, which occur simultaneously. In a well-designed and constructed pavement, the two processes result in the need to rehabilitate the pavement at approximately the same time. This is called the design life. The design life for most new pavements is 20 years. Each deterioration process has its own set of pavement defects, which are related to the process.

Fatigue

The first deterioration process, fatigue, is caused by heavy axle loads. As the pavement structure flexes or bends from heavy wheel loads, the asphalt concrete layer's ability to flex is consumed. With enough bending, the asphalt concrete layer begins to break at the bottom. These cracks progress upward until they reach the surface and appear as alligator cracking. These areas are repaired by removal and replacement of the asphalt concrete in the affected areas. These repairs are commonly called digouts.

As the pavement structure, its supporting soils, and the precise loading from wheel loads vary, so does the time it takes for alligator cracking to appear. As alligator cracking appears, the pavement should be repaired with digouts. Generally, when the total cumulative quantity of digouts reaches approximately 10 percent, or more, of the total area, the pavement is considered to have reached its service life and requires major rehabilitation.

Aging

The major element of the pavement structure that ages is the asphalt concrete layer. To a minor extent, aggregate bases can age if contaminated by fine soil particles, which are transported from the subsoil into the aggregate base.

Asphalt Concrete (AC) pavement is composed of aggregates and asphalt binder. The aggregates used are generally of fair quality and will experience some breakdown over time. Aggregate aging problems need to be addressed with maintenance treatments. As the asphalt binder ages, it loses volume through the loss of volatile components in the asphalt. As the volume decreases, or shrinks, the pavement will progressively crack from the resulting tensile strain in the layer. Normally, these cracks first show up as transverse cracks. They also show up in weak areas, such as paving joints. These cracks widen and increase over time until the pavement has a checkerboard appearance.

The aging process also causes the pavement to become more brittle. The increased stiffness results in additional cracking from loaded vehicles. This load induced cracking from the brittleness of the asphalt concrete is very similar to fatigue cracking in appearance.

The major agent for deterioration of the asphalt concrete binder is oxygen, whose carrier is water. Water enters the pavement either from the surface or as water vapor from underneath.

TYPICAL PAVEMENT DEFECTS

StreetSaver® identifies eight different Asphalt Concrete distress types. These are:

1. Alligator Cracking (Fatigue)
2. Block Cracking
3. Distortions
4. Longitudinal and Transverse Cracking
5. Patching and Utility Cut Patching
6. Rutting and Depression
7. Raveling
8. Weathering

These defects are common to virtually the entire pavement as aging progresses.

For purposes of understanding the levels of these distresses, the condition level descriptions from the ASTM D6433 “Standard Practice for Roads and Parking Lots Pavement Condition Index Surveys” are included herein:

Alligator Cracking (Fatigue)

Image 1: Alligator Cracking

Description:

Alligator or fatigue cracking is a series of interconnecting cracks caused by fatigue failure of the asphalt concrete surface under repeated traffic loading. Cracking begins at the bottom of the asphalt surface (or stabilized base) where tensile stress and strain are highest under wheel load. The cracks propagate to the surface initially as a series of parallel longitudinal cracks. After repeated traffic loading, the cracks connect, forming many sided, sharp-angled pieces that develop a pattern resembling chicken wire or the skin of an alligator. The pieces are generally less than 0.6 m (2 ft) on the longest side. Alligator cracking occurs only in areas subjected to repeated traffic loading, such as wheel paths. Therefore, it would not occur over an entire area unless the entire area were subject to traffic loading (pattern-type cracking that occurs over an entire area not subjected to loading is called “block cracking,” which is not a load-associated distress).

Severity Levels:

L Fine, longitudinal hairline cracks running parallel to each other with no, or only a few interconnecting cracks. The cracks are not spalled.

M Further development of light alligator cracks into a pattern or network of cracks that may be lightly spalled.

H Network or pattern cracking has progressed so that the pieces are well defined and spalled at the edges, with some pieces rocking under vehicle traffic.

Block Cracking

Image 2: Block Cracking

Description:

Block cracks are interconnected cracks that divide the pavement into approximately rectangular pieces. The blocks may range in size from approximately 0.3 by 0.3 m (1 by 1 ft) to 3 by 3 m (10 by 10 ft). Block cracking is caused mainly by shrinkage of the asphalt concrete and daily temperature cycling (which results in daily stress/strain cycling). It is not load-associated. Block cracking usually indicates that the asphalt has hardened significantly. Block cracking normally occurs over a large portion of the pavement area, but sometimes will occur only in non-traffic areas. This type of distress differs from alligator cracking in that alligator cracks form smaller, many-sided pieces with sharp angles. Also, unlike block cracks, alligator cracks are caused by repeated traffic loadings and therefore found only in traffic areas (i.e., wheel paths).

Severity Levels: (*See definitions of longitudinal transverse cracking.)

- **L** Blocks are defined by low-severity* cracks.
- **M** Blocks are defined by medium-severity* cracks.
- **H** Blocks are defined by high-severity* cracks.

Distortions

Image 3: Distortions

Description:

Distortions are usually caused by corrugations, bumps, sags and shoving. They are localized abrupt upward or downward displacements in the pavement surface, a series of closely spaced ridges and valley or localized longitudinal displacements of the pavement surface. Distortions affect ride quality.

Severity Levels:

L Distortion produces vehicle vibrations, which are noticeable, but no reduction in speed is necessary for comfort or safety and/or individual distortions cause the vehicle to bounce slightly but create little discomfort.

M Distortion produces vehicle vibrations, which are significant, and some reduction in speed is necessary for safety and comfort.

H Distortion produces vehicle vibrations, which are so excessive that speed must be reduced considerably for safety and comfort.

Longitudinal and Transverse Cracking (Non-PCC Slab Joint Reflective)

Image 4: Longitudinal and Transverse Cracking

Description:

Longitudinal cracks are parallel to the pavement's centerline or laydown direction. They may be caused by:

1. A poorly constructed paving lane joint.
2. Shrinkage of the AC surface due to low temperature or hardening of the asphalt and/or daily temperature cycling.
3. A reflective crack caused by cracking beneath the surface course, including crack in PCC slabs.
4. Decreased support or thickness near the edge of the pavement.

Transverse cracks extend across the pavement at approximately right angles to the pavement centerline or direction of laydown. These may be caused by conditions (2) and (3) above. These types of cracks are not usually load-associated.

Severity Levels:

L One of the following conditions exists:
- (1) Non-filled crack where the width is less than 10 mm (3/8 in.) or
- (2) filled crack of any width, where crack filler in satisfactory condition.

M One of the following conditions exists:
- (1) non-filled crack width is greater than or equal to 10 mm and less than 75 mm (3/8 to 3 in.)
- (2) non-filled crack is less than or equal to 75 mm (3 in.) surrounded by light and random cracking, or
- (3) filled crack is of any width surrounded by light random cracking.

H One of the following conditions exists:
- (1) any crack filled or non-filled surrounded by medium or high severity random cracking,
- (2) non-filled crack greater than 75 mm (3 in.) or
- (3) A crack of any width where approximately 100 mm (4 in.) of pavement around the crack is severely broken.

Patching and Utility Cut Patching

Image 5: Patching and Utility Cut Patching

Description:

A patch is an area of pavement that has been replaced with new material to repair the existing pavement. A patch is considered a defect no matter how well it is performed (a patched area or adjacent area usually does not perform as well as an original pavement section). Generally, some roughness is associated with this distress.

Severity Levels:

L Patch is in good condition and satisfactory. Ride quality* is rated as low severity or better.

M Patch is moderately deteriorated and/or ride quality* is rated as medium severity.

H Patch is badly deteriorated and/or ride quality* is rated as high severity. Needs replacement soon.

*Ride quality is defined in the severity levels of distortions.

Rutting and Depressions

Image 6: Rutting and Depressions

Description:

A rut is a surface depression in the wheel paths. Pavement uplift may occur along the sides of the rut, but in many instances, ruts are noticeable only after a rainfall when the paths are filled with water. Rutting stems from a permanent deformation in any of the pavement layers or sub-grades, usually caused by consolidated or lateral movement of the materials due to traffic load. Significant rutting can lead to major structural failure of the pavement.

Depressions are localized areas where the pavement structure is lower than the surrounding area, but the transition is not abrupt enough to be considered a distortion. They are often referred to as “bird baths”.

Severity Levels: (Average Rut or Depression Depth)

- **L** 1/2" to less than 1” (13 to 25mm).
- **M** 1” to less than 2” (25 to 50mm).
- **H** equal to or greater than 2” (over 50mm).

Raveling

Image 7: Raveling

Description:

Raveling is the dislodging of coarse aggregate particles. Raveling may be caused by insufficient asphalt binder, poor mixture quality, insufficient compaction, segregation, or stripping.

Coarse aggregate refers to the predominant coarse aggregate size of the asphalt mix, and aggregate clusters refers to when more than one adjoining coarse aggregate piece is missing. If in doubt about a severity level, three representative areas of one square yard each (square meter) should be examined and the number of missing aggregate particles/clusters is counted.

Severity Levels:

M Considerable loss of coarse aggregate greater than 20 per square yard (square meter), and/ or clusters of missing coarse aggregate are present.

H Surface is rough and pitted, and it may be completely removed in places.

Weathering

Image 8: Weathering

Description:

Weathering is the wearing away of the asphalt binder and fine aggregate matrix.

Coarse aggregate refers to predominant coarse aggregate size of the asphalt mix. Loss or dislodging of coarse aggregate is covered under Raveling. Surface wear is normally caused by oxidation, inadequate compaction, insufficient asphalt content, excessive natural sand, surface water erosion, and traffic. Weathering occurs faster in areas with high solar radiation.

Severity Levels:

L Asphalt surface beginning to show signs of aging which may be accelerated by climatic conditions loss of fine aggregate mix is noticeable and may be accompanied by fading of the asphalt color. Edges of the aggregates are beginning to be exposed (less than 0.05 inches or 1 mm).

M Loss of the fine aggregate matrix is noticeable and the edges of the coarse aggregate have been exposed up to 1/4th of the width (of the longest side) of the coarse aggregate due to the loss of fine aggregate matrix.

H Edges of the coarse aggregate have been exposed greater than 1/4th of the width (of the longest side) of the coarse aggregate. There is considerable loss of fine aggregate matrix leading to potential or some loss of coarse aggregate.

PAVEMENT MAINTENANCE TREATMENTS

Pavement maintenance treatments are designed to slow the pavement aging process. Mainly, the treatments are designed to protect the pavement from the adverse effects of water and to some extent vehicle traffic.

Maintenance treatments, which protect the pavement from aging, are crack sealing, digouts, slurry seals, and cape seals. When pavements have extensive cracking and are beyond their design life, interim holding measures including skin patches and thin overlays are used as a stop gap prior to major rehabilitation.

The following outlines some of the more common types of maintenance treatments:

Crack Sealing

Crack sealing prevents surface water from getting beneath the asphalt concrete layer into the aggregate bases. Crack sealing is generally performed using hot rubberized crack sealing material. The procedure includes routing small cracks, cleaning and sealing.

Digouts

Digouts are small areas of deteriorated pavements, which are removed and replaced with new asphalt concrete. Pavement removal is accomplished by cold planning or saw cutting and excavation. New asphalt is installed in at least two lifts. The digout depth is determined depending on the street type and construction.

Slurry Seals

Slurry seals consist of a combination of fine aggregate and emulsified oil. A new type of slurry seal called Rubberized Asphalt Slurry (RAS) is in the development stage. Currently, the cost of RAS is 2 to 3 times as much as a conventional slurry seal, which makes the product economically unattractive. Slurry seals are used when the existing pavement surface is severely raveled.

Cape Seals

Cape seals consist of a chip seal over coated with a slurry seal. A chip seal is an application of small angular rock (chips) approximately 1/4" to 3/8” in a maximum size embedded into a thick application of asphalt emulsion. Most chip seals incorporate polymer modified binders.

Cape seals are used on residential and collector streets to maintain a pavement, which may need an overlay, but there are not sufficient funds available. Cape seals are placed over low to moderate alligator cracks and block shrinkage cracking. Due to the distress covered by the cape seal, small areas of disbanding or failure may occur and will require patching.

Cape sealed surfaces are fairly coarse compared to new paving. Due to this characteristic, they may not be acceptable to some residential areas.

Interim Holding Measures (or “Stop Gap” in StreetSaver® Terms)

Interim holding measures or stop gap treatments are used to “hold” the pavement together until funds become available for major rehabilitation. Common holding measures used include skin patches and thin overlays.

Skin patches are thin lifts of fine asphalt concrete placed over deteriorated areas.

Thin maintenance overlays are placed to hold the surface together. The asphalt concrete layer is generally 1 to 1-1/2 inches thick. A 3/8 inch aggregate is used with a rubberized asphalt binder, where the rubber has been mixed into solution with the asphalt binder during the refinement process. This is referred to as Terminally Blended Asphalt Rubber Binder.

PAVEMENT REHABILITATION TREATMENTS

Pavement rehabilitation consists of treatments used to restore the existing pavement quality or to add additional structural support to the pavement. Rehabilitation treatments include conventional overlays; pulverization and resurfacing; ARHM (asphalt rubber hot mix) overlays; AC removal and replacement (Mill and Fill); and reconstruction.

The following outlines some of the more common types of rehabilitation treatments:

Conventional Overlays

Conventional overlays generally consist of surface preparation and varying thicknesses of asphalt concrete. Surface preparation can consist of crack filling, pavement repairs of base failures and leveling courses.

The overlay thickness is determined by the structural requirement of the deflection analysis and reflective cracking criteria. The reflective cracking criteria requires the thickness of the overlay to be a minimum 1/2 the thickness of the existing bonded layers. Pavement fabric can account for 0.10 ft of asphalt for reflective cracking criteria if the structural requirements from the deflection analysis are met.

Conventional overlays have an expected service life of 7 to 13 years if they are designed to meet structural and reflective cracking criteria and are well constructed.

Pulverization and Resurfacing

Pulverization and resurfacing is an alternative to conventional overlays for streets that are structurally adequate but exhibit sufficient cracking to warrant improvement to the asphalt surface.

Pulverization and resurfacing are an intermediate step between overlays and reconstruction. The existing asphalt concrete is recycled into aggregate base and the recycled base increases the total structural section. The surface is re-graded to conform to flush facilities similar to the way the pavement is keycut for overlays. The re-grading allows for some improvement to the cross section and profile. This method eliminates the stress history and cracking of the old asphalt concrete pavement, thus eliminating negative impacts on the new asphalt concrete surface.

Some instability can be encountered when the pulverization method is used. PEI typically recommends budgeting 5 to 10 percent of the pulverized sub-grade area for stabilization. Stabilization can be performed using 6-inch deep lift asphalt concrete.

Pulverization and resurfacing has a life expectancy of 13 to 18 years. The life expectancy is slightly less than full reconstruction because some residual deficiencies in thickness or quality of the unaffected layers may still exist. Additional testing is necessary to determine if pulverization is a viable alternative. This testing includes measuring the existing structural section and testing the native soil for bearing capacity (R-value).

RHMA Overlays

Rubberized Hot Mix Asphalt (RHMA) is a material that uses crumb rubber mixed with traditional asphalt binders to produce a more flexible paving material than conventional dense graded hot mix asphalt (HMA).

Caltrans has developed design criteria for use of this material based on accelerated performance testing using its dual wheel accelerated pavement testing equipment. The Caltrans criteria allows RHMA to be used in a one to two ratio to conventional hot mix asphalt. Thus 1 inch of RHMA is equal to 2 inches of conventional hot mix asphalt for reflective cracking criteria.

RHMA costs approximately 1-3/4 times as much as conventional asphalt and provides a similar service life to that of conventional hot mix asphalt, 7 to 13 years. RHMA is generally only feasible when vertical constraints such as curb and gutter restrict the thickness of the overlay. RHMA typically has more open surface than conventional hot mix asphalt and is more difficult to obtain a high-quality finished product.

AC Removal and Replacement (Mill and Fill)

On some thick asphalt concrete pavements, the most economical approach to rehabilitating the pavement is to remove some of the existing asphalt concrete surface, which matches the existing profile. The replacement material can be either conventional hot mix asphalt (HMA) or RHMA, depending on the design criteria.

In other cases, due to drainage or other physical constraints, additional thickness cannot be placed. If the underlying base is sufficient to support anticipated loading, the asphalt layer can be removed and replaced. Depending on existing conditions, this method should have a life of 15 to 20 years.

Reconstruction

When the pavement has severe cross section deficiencies or requires significant structural strengthening, reconstruction may be the only alternative. Generally, existing pavement materials are recycled and incorporated into the new pavement structure. Structural section material alternatives include treated soils, full depth asphalt concrete, recycled materials and Portland cement concrete.

Section III
Pavement Management Program Specifics

PAVEMENT MANAGEMENT PROGRAM SPECIFICS

This section discusses the characteristics of the Pavement Management Program and its application for The City of Salinas.

BACKGROUND (STREETSAVER®)

During the early years of Pavement Management software development, many companies developed private software packages focused on management of municipal street systems. Though these programs were versatile and sophisticated, the user was also dependent upon the software vendor for training, program updates, and software servicing. Many of the vendors had difficulty maintaining their software, leaving agencies stranded after making a substantial investment.

In 1982, the Metropolitan Transportation Commission (MTC) completed a study of local road and street maintenance needs and revenue short falls in the San Francisco Bay Area. The results of the study indicated that local jurisdictions were spending only 60 percent of funds required to maintain roads in a condition considered adequate. This indicated a need to improve pavement maintenance and rehabilitation techniques and practices. A committee was formed to evaluate pavement management efforts. At approximately the same time, six public works directors reviewed a proposal to develop a prototype Pavement Management Program (PMP); however, it was felt that the proposed system was too complex. This group strongly emphasized that simplicity was the most important objective to be developed in a PMP if it was to be adopted and used by cities and counties.

In 1983, a consultant was retained to assist MTC in determining PMP needs, PMP resources, and problems. In addition, they were to develop three basic elements of a standardized prototype PMP: a pavement condition index (PCI), effective maintenance treatments for the Bay Area, and a network level assignment procedure. The result was the first version of the MTC PMP. Since that time the program has evolved into StreetSaver®.

Today, MTC uses StreetSaver® to help local cities and counties better allocate resources, predict the future condition of their pavements at different levels of funding, and demonstrate the effects of underfunded road programs. The Bay Area was one of the first regions in the country to implement a Pavement Management Program that is used by nearly all of its localities. Using StreetSaver®, cities and counties can plan and manage road improvement projects, document budget needs and shortfalls, and use the collected data to build support for additional transportation funding.

StreetSaver® manages a collection of related data organized for easy storage and retrieval. The StreetSaver® program includes a database comprised of several sets of related data ("tables") that contain information about the street network in the jurisdiction. This information includes pavement condition, the available maintenance/rehabilitation treatments and their costs, and the history of the network. Based on this information, budget analyses are performed. A budget analysis allows the user to project network maintenance and rehabilitation needs, and costs to evaluate the consequences of various budget allocation alternatives. Alternatives can be evaluated in terms of maintenance and rehabilitation that can actually be performed, future pavement condition, and deferred costs. For some agencies, use of the StreetSaver® program is cyclical. For others, pavement management is integrated into an ongoing effort to manage their street networks.

Implementation

There are several steps involved in implementing an effective Pavement Management Program. These tasks should be completed on a periodic basis. These tasks include:

1. Collect pavement condition and maintenance/rehabilitation data.
2. Enter re-inspection data and/or applied maintenance and rehabilitation information.
3. Check/update maintenance treatment definitions and pavement category definitions.
4. Calculate Pavement Condition Index (PCI)
5. Evaluate system and current Maintenance/Rehabilitation strategies. Determine Budget needs and if necessary, develop alternate Budget Summaries.
6. Present analysis outputs to funding bodies.
7. Acquire funds and apply maintenance/rehabilitation treatments.

PROGRAM ASSUMPTIONS

The goal of the Pavement Management Program is to furnish budgetary amounts in order to achieve system wide improvements in the overall pavement condition. The goal of project engineering is to obtain the proper structural affect, for the lowest financial amount, for a given subset of the network to be maintained. Using the Pavement Management Program, management is able to realistically budget for economically maintaining the City's pavement Network. Annually updating maintenance activity and costs keeps the program current.

PAVEMENT MAINTENANCE AND REHABILITATION (M&R) UNIT COSTS

The reliability and accuracy of any PMP is based on the information contained in its Decision Tree. The listed treatments in the Decision Tree are generalized to provide a range of treatments. The exact treatment would need to be determined during the design phase of a project.

Typical treatments within each generalized treatment range are listed in table 3 below.

Treatment Category	Typical Treatment
Light Maintenance	• Slurry Seal or Micro-Surface • Fog Seal or Scrub Seal
Heavy Maintenance	• Chip Seal, Cape Seal • Slurry Seal or Micro-Surface with Digouts • Thin Maintenance Overlay (TMO)
Light Rehab.	• Overlay (2" and under) or Thin Mill and Fill
Heavy Rehab.	• Overlay (greater than 2") or Thick Mill and Fill • Cold-In-Place Recycling • Full Depth Reclamation • Pulverize and Resurfacing
Reconstruct	• Full Section Reconstruction

Table 3: General Treatment Categories with Typical Treatments

Based on a street segment's current PCI condition, StreetSaver® assigns a treatment action and estimated cost to perform the suggested treatment. This cost is not just what is paid to the contractor but should include all the "Soft Costs" incurred by The City.

Soft Costs can include the surface preparation, engineering cost, materials testing, and construction inspection. Even if these tasks are done "in-house", the inclusion in combination with the construction costs will tend to show the "true picture" of the cost of a specific project.

The following costs were used to develop the indicated budget numbers for each street segment PEI reviewed. The costs include, but are not limited to, miscellaneous work such as transitions, striping, and digouts.

The costs are averages. Small systems will have higher unit costs and large systems will have lower unit costs. The larger the annual project size, the better the economies of scale. Timing is also important. Bidding the work in early spring will result in significantly lower prices than bids solicited in the late summer or fall. If small packages are used, costs could be 25 to 50 percent higher.

The unit costs include a 15% increase to account for potential PCC repairs that may be triggered by applying a maintenance or rehabilitation treatment to a street section. The unit costs also include a 15% allowance to account for "Soft Costs" (engineering design, construction management, and inspection and material testing fees. As well as a 10% contingency. These prices are in today's dollars (2023) and do not account for inflation

Treatment	Arterial	Collector	Residential
Cost/ Sq Yd			
Crack Seal ($$/LF)	$1.56	$1.25	$1.25
Light Maintenance	$5.63	$5.63	$5.63
Heavy Maintenance	$13.86	$12.60	$12.60
Light Rehab	$50.40	$44.10	$44.10
Heavy Rehab	$104.71	$91.35	$75.60
Reconstruct	$176.40	$163.80	$151.20

Table 1: General Treatment Unit Costs used in City of Salinas StreetSaver® Database.

Decision Trees / Treatment Strategies

The Decision Trees are broken down into two main areas; Preventive Maintenance (PM) and Rehabilitation. StreetSaver® makes preventive maintenance a top priority. The longer a segment can be kept in good condition the lower the overall cost of its treatments. Preventive Maintenance addresses the sections that have a PCI of 71 and greater. This area is further broken down to specific treatments that could be better termed as Crack Sealing, Surface Treating and Restoration Treatments.

The Decision Tree allows the user to program these treatments on a cyclical basis. As part of this cyclical process, once a road has reached the point where it can no longer be maintained by a crack seal or a surface seal the program will shift to a Restoration Treatment. The program uses this treatment to restore the pavement in long term budgeting scenarios to the Very Good category.

The Decision Tree for Preventive Maintenance and Rehabilitation was reviewed with The City of Salinas and updated by PEI. The decision tree customizes the logic for how and what maintenance and rehabilitation treatments StreetSaver® selects.

Five general pavement treatment categories were used to account for the various treatments in the decision tree: Reconstruction, Heavy Rehabilitation, Light Rehabilitation, Heavy Maintenance, and Light Maintenance. Specifying a general

treatment category allows the user to stay focused on a budget level analysis rather than moving to a project level analysis.

The PMP software assumes average construction and material quality. Pavement life is very sensitive to materials and workmanship quality. Poor quality new construction may result in up to a 50 percent loss in the pavement life. In other words, poor quality new construction may last 10 to 15 years, whereas excellent quality construction may last 20 to 30 years. Investing in quality, both in design and construction, provides significant returns in extended pavement life resulting in lowered annual maintenance costs.

The Decision Tree for The City of Salinas can be found in **Appendix A** of this report.

ANNUAL PAVEMENT MAINTENANCE / REHABILITATION PROGRAM

The PCI range of 0 to 100 is broken down into five condition categories for budget calculation purposes. StreetSaver® default PCI breakpoints were used during the update of The City of Salinas's Pavement Management Program.

The breakpoints are as follows:

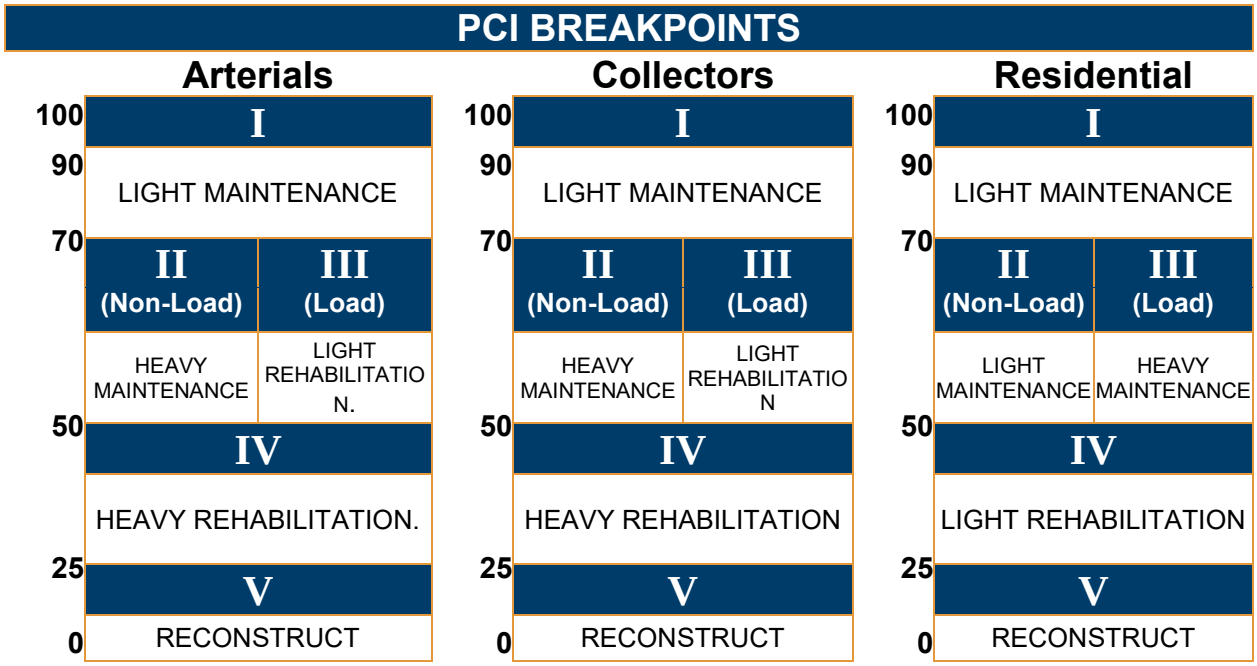

Figure 3: PCI Breakpoints

When a pavement section is identified for maintenance or rehabilitation, a user defined network-level cost category for a pavement of that functional class, type and condition is used to determine the needed funds for that section.

For sections falling within the preventive maintenance category, or category one (1), a time sequence is used to identify the appropriate treatment and cost. For those sections falling into a rehabilitation category, or categories two (2), three (3), four (4), or five (5), the PCI is used to determine the repair category for a pavement section.

The repair category is combined with functional classification (as a surrogate for traffic index) and surface type (as a surrogate for structural adequacy) to identify the appropriate treatment and cost. The treatment and cost identified for the section is a network-level budget planning treatment and is generally considered as a cost category for budgeting purposes rather than an actual treatment. Some sections will require more money than estimated, some will require less. A project-level analysis is used to determine the actual treatment to be used for a given section based on condition, structural capacity and other factors.

The funding needs are summed for all sections needing work for each year of the analysis period to determine the annual budget needs. The needs analysis provides a list of sections needing work over the selected analysis period and an estimate of the funds needed. In StreetSaver®, this analysis period is 5 years. It identifies maintenance and rehabilitation needs without considering funding constraints, i.e. the Needs Analysis is unconstrained by the available budget. StreetSaver® identifies candidate sections and funds needed to provide the level of service to meet agency-defined goals.

When an agency has a considerable backlog of maintenance and repair needs, the first-year needs will include the bulk of sections needing work. From a funding standpoint, this may appear unrealistic; however, the needs analysis is only the first step in planning and programming. The information from the needs analysis is generally best presented to management as the total 5 year needs or the average needs per year of the 5-year period. Few agencies will be able to meet the first year needs as developed by the program.

The StreetSaver® Needs Analysis provides information on the condition of the network over the analysis period with and without application of the treatments. Since the application of treatments assume no limit on funds, this can be considered the upper limit of condition that could be reached by the agency and the condition without treatment can be considered the lower limit.

StreetSaver® uses a ranking process based on cost-effectiveness concepts. Basically, the longer a pavement is in good condition, the more benefit the user gets from the pavement. This can be approximated by the area under the PCI vs Time curve.

The larger that area, the longer the pavement provides the desired level of service. That area is divided by annualized costs per unit area. This ratio is weighted for different usage so that arterial streets are selected for repair before collectors in the same condition,

which are selected for repair before residential/locals in the same condition. Sections of pavements that provide the best service for the least money are then selected as those that should be repaired first. StreetSaver® provides a ranked listing based on this cost-effectiveness analysis. StreetSaver® also shows the condition with and without treatment, the estimated costs for each section, the calculations used to determine the ranking, and a listing of sections not recommended for treatment.

VISUAL EVALUATIONS

PEI's technical staff evaluated all of the streets. The streets were rated based on the StreetSaver® system described in the Background. Once the data was entered into the program, PEI completed a quality assurance review of the system and verified the results in the field. The street inventory was based on visual evaluations.

PROGRAM UPDATES

The Pavement Management Program is a dynamic program. It is expected that The City will continue to visually rate the street network and update the database at least every three years. In addition to the visual review, The City should update the database by adding new streets incorporated into The City as well as new maintenance and rehabilitation work performed to any particular street segment.

Section IV
Reference Reports

Street Name Alphabetical Listing

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	1STAVE	1ST AVE	15	TOWT ST	E MARKET ST	R	A	2	1,915	63	120,645	**64**	03/13/23	65	70-61	Fair (70-51)	04/26/19	SLURRY SEAL
Dist 2	1STAVE	1ST AVE	20	E MARKET ST	E LAUREL DR	R	A	2	650	36	23,400	**44**	03/13/23	45	50-41	Poor (50-31)	04/26/19	SLURRY SEAL
Dist 2	1STAVE	1ST AVE	25	E LAUREL DR	GARNER AVE	R	A	2	2,085	36	75,060	**26**	03/13/23	28	30-21	Failed (30-0)		
Dist 2	2NDAVE	2ND AVE	010	GARNER AVE	BELLEHAVEN ST	R	A	2	910	36	32,760	**22**	03/13/23	24	30-21	Failed (30-0)		
Dist 2	2NDAVE	2ND AVE	020	BELLEHAVEN ST	COOPER AVE	R	A	2	1,470	36	52,920	**32**	03/13/23	34	40-31	Poor (50-31)		
Dist 2	2NDAVE	2ND AVE	110	E MARKET ST	TOWT ST	R	A	2	1,200	37	44,400	**75**	03/13/23	76	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	ABBEYWAY	ABBEY WAY	10	CROMWELL DR	GLADSTONE WAY	R	A	2	248	33	8,184	**69**	02/08/23	70	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 3	ABBOTTPL	ABBOTT PL	15	N END	S END	R	A	2	787	44	34,628	**15**	01/18/23	17	20-11	Failed (30-0)		
Dist 3	ABBOTTST	ABBOTT ST	110	HARRIS RD	CITY LIMITS	A	A	3	1,322	57	75,372	**59**	01/19/23	61	60-51	Fair (70-51)		
Dist 3	ABBOTTST	ABBOTT ST	NB010	HARRIS RD	2950' N/O HARRIS RD (W/C)	A	O	2	2,950	28	82,600	**63**	01/19/23	64	70-61	Fair (70-51)	05/21/19	DEEP PATCH
Dist 3	ABBOTTST	ABBOTT ST	NB020	2950' N/O HARRIS RD (W/C)	GROWERS ST	A	C	2	3,650	44	160,600	**34**	01/19/23	37	40-31	Poor (50-31)	01/01/02	1-1/2" OVERLAY
Dist 3	ABBOTTST	ABBOTT ST	NB030	GROWERS ST	S SANBORN RD	A	O	2	1,811	44	79,684	**22**	01/19/23	25	30-21	Failed (30-0)	10/28/19	DEEP PATCH
Dist 3	ABBOTTST	ABBOTT ST	NB040	S SANBORN RD	E ROMIE LN	A	A	2	1,076	36	38,743	**78**	01/19/23	80	80-71	Good (90-71)	05/27/22	CHIP SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB050	E ROMIE LN	JOHNSON AVE	A	A	2	262	36	9,460	**74**	01/19/23	76	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB060	JOHNSON AVE	LOS PALOS DR	A	O	2	1,269	36	45,684	**77**	01/19/23	78	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB070	LOS PALOS DR	ALAMEDA AVE	A	O	2	1,316	36	47,376	**76**	01/19/23	77	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB080	ALAMEDA AVE	MAPLE ST	A	O	2	892	36	32,112	**75**	01/19/23	76	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB090	MAPLE ST	JOHN ST	A	A	2	771	36	27,756	**73**	01/19/23	75	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB100	JOHN ST	FRONT ST	A	A	2	901	36	32,455	**33**	01/19/23	36	40-31	Poor (50-31)	01/01/02	CAPE SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB010	FRONT ST	JOHN ST	A	A	2	901	36	32,455	**30**	01/19/23	33	30-21	Failed (30-0)	05/16/19	DEEP PATCH
Dist 3	ABBOTTST	ABBOTT ST	SB020	JOHN ST	MAPLE ST	A	A	2	771	36	27,756	**72**	01/19/23	74	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB030	MAPLE ST	ALAMEDA AVE	A	O	2	892	36	32,112	**76**	01/19/23	78	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB040	ALAMEDA AVE	LOS PALOS DR	A	O	2	1,316	36	47,376	**76**	01/19/23	77	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB050	LOS PALOS DR	JOHNSON AVE	A	O	2	1,269	36	45,684	**75**	01/19/23	76	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB060	JOHNSON AVE	E ROMIE LN	A	A	2	262	36	9,460	**78**	01/19/23	80	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB070	E ROMIE LN	S SANBORN RD	A	A	2	1,076	36	38,743	**76**	01/19/23	78	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB080	S SANBORN RD	GROWERS ST	A	A	2	1,811	44	79,684	**27**	01/19/23	30	30-21	Failed (30-0)	05/21/19	DEEP PATCH
Dist 3	ABBOTTST	ABBOTT ST	SB090	GROWERS ST	900' S/O HARKINS RD (W/C)	A	C	2	3,225	44	141,900	**30**	01/19/23	33	30-21	Failed (30-0)		
Dist 3	ABBOTTST	ABBOTT ST	SB100	900' S/O HARKINS RD (W/C)	HARRIS RD	A	O	2	3,300	28	92,400	**70**	01/19/23	71	70-61	Fair (70-51)	01/01/86	2" OVERLAY
Dist 1	ABERFORDCI	ABERFORD CIR	10	DE CUNHA CT	END	R	A	2	260	31	8,060	**40**	02/02/23	42	40-31	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 1	ACAPULCOWA	ACAPULCO WAY	10	MAZATLAN ST	DURANGO ST	R	A	2	510	37	18,870	**78**	02/01/23	79	80-71	Good (90-71)		
Dist 1	ACAPULCOWA	ACAPULCO WAY	20	DURANGO	END	R	A	2	220	34	7,480	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 1	ACOSTAPLZ	ACOSTA PLZ	20	N SANBORN RD	END	R	A	2	270	42	11,340	**47**	02/02/23	49	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 1	ACOSTAPLZ	ACOSTA PLZ	80	GARNER AVE	END	R	A	2	895	41	36,695	**73**	02/02/23	74	80-71	Good (90-71)	01/01/08	CAPE SEAL
Dist 2	ACOSTAST	ACOSTA ST	10	N SANBORN RD	BEECH ST	R	A	2	1,236	32	39,552	**51**	03/13/23	52	60-51	Fair (70-51)		
Dist 2	ACOSTAST	ACOSTA ST	110	BEECH ST	TOWT ST	R	A	2	405	40	16,200	**46**	03/13/23	47	50-41	Poor (50-31)		
Dist 2	ACOSTAST	ACOSTA ST	120	TOWT ST	2ND AVE	R	A	2	484	32	15,488	**21**	03/13/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	ADAMSST	ADAMS ST	15	W LAUREL DR	NAVAJO DR	C	A	2	1,609	32	51,515	**31**	02/16/23	34	40-31	Poor (50-31)	03/11/19	DEEP PATCH
Dist 5	ADAMSST	ADAMS ST	45	MOHAWK AVE	NAVAJO DR	R	A	2	1,669	32	53,417	**29**	02/16/23	31	30-21	Failed (30-0)	05/16/19	DEEP PATCH
Dist 5	ADOBEDR	ADOBE DR	15	SLOAT DR	VICTOR ST	R	A	2	1,021	37	37,782	**66**	03/02/23	67	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 2	AFTONRD	AFTON RD	010	SYCAMORE RD	BARDIN RD	R	A	2	1,376	34	46,784	**22**	03/13/23	24	30-21	Failed (30-0)	04/15/19	SHALLOW PATCH
Dist 2	AIRPORTBLV	AIRPORT BLVD	010	SKYWAY BLVD	MERCER WAY	C	A	4	1,030	60	61,843	**48**	01/17/23	51	50-41	Poor (50-31)	05/24/19	DEEP PATCH
Dist 2	AIRPORTBLV	AIRPORT BLVD	020	MERCER WAY	ROY DIAZ ST	C	A	4	2,193	62	135,966	**82**	01/17/23	84	90-81	Good (90-71)	06/03/22	RUBBER
Dist 2&3	AIRPORTBLV	AIRPORT BLVD	030	ROY DIAZ ST	TERVEN AVE	A	A	4	890	50	44,500	**66**	01/23/23	68	70-61	Fair (70-51)		
Dist 3	AIRPORTBLV	AIRPORT BLVD	040	TERVEN AVE	HANSEN ST	C	A	4	1,268	59	74,812	**33**	01/17/23	36	40-31	Poor (50-31)	05/24/19	DEEP PATCH
Dist 3	AIRPORTBLV	AIRPORT BLVD	050	HANSEN ST	SW END	R	A	2	385	48	18,480	**64**	01/17/23	65	70-61	Fair (70-51)		
Dist 3	AIRPORTBLV	AIRPORT BLVD	110	800' N/O HANSEN ST	AIRPORT BLVD	C	A	1	595	24	14,280	**53**	01/23/23	56	60-51	Fair (70-51)		
Dist 3	ALAMEDAAVE	ALAMEDA AVE	015	ABBOTT ST	MAPLEWOOD DR	C	P	2	1,598	32	51,136	**58**	01/20/23	59	60-51	Fair (70-51)		
Dist 3	ALAMEDAAVE	ALAMEDA AVE	025	MAPLEWOOD DR	E ROMIE LN	C	A	2	943	32	30,176	**20**	01/20/23	24	20-11	Failed (30-0)	09/16/19	DEEP PATCH
Dist 3	ALAMEDAAVE	ALAMEDA AVE	035	E ROMIE LN	SAN MIGUEL AVE	C	A	2	1,377	32	44,064	**73**	01/20/23	75	80-71	Good (90-71)		
Dist 3	ALAMEDAPL	ALAMEDA PL	10	ALAMEDA AVE (N)	ALAMEDA AVE (S)	R	A	2	633	32	20,256	**67**	01/19/23	68	70-61	Fair (70-51)	01/01/08	CAPE SEAL
Dist 1	ALAMOWAY	ALAMO WAY	10	LAS CASITAS DR	LA HONDA CT (N)	R	A	2	510	32	16,320	**36**	02/02/23	38	40-31	Poor (50-31)		
Dist 1	ALAMOWAY	ALAMO WAY	20	LA HONDA CT (N)	GARNER AVE	R	A	2	1,378	37	50,986	**60**	02/02/23	61	60-51	Fair (70-51)		
Dist 1	ALDERCIR	ALDER CIR	10	NOGAL DR	END	R	A	2	339	33	11,212	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	ALEXANDERS	ALEXANDER ST	15	WEST ST	HOMESTEAD	R	P	2	639	34	21,726	**57**	03/15/23	58	60-51	Fair (70-51)		
Dist 5	ALHAMBRAST	ALHAMBRA ST	10	SEPULVEDA DR	N 1ST ST	R	A	2	509	30	15,270	**23**	02/17/23	25	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 2	ALISALRD	ALISAL RD	010	CITY LIMIT	ROUND ABOUT @ SCONBERG	A	A	4	220	53	11,660	**93**	01/25/23	100	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	ALISALRD	ALISAL RD	020	ROUND ABOUT @ SCONBERG	ROUND ABOUT @ BARDIN/ E ALISA	A	A	4	375	39	14,625	**93**	01/25/23	100	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	ALISALRDRA	ALISAL RD ROUNDABOUT @ BARDIN/ E ALISAL	010	WB ENTRANCE	ONE LOOP	A	A	1	360	26	9,360	**93**	03/15/23	100	100-91	Excellent (100-91)		
Dist 2	ALISALRDRA	ALISAL RD ROUNDABOUT @ SCONBERG	005	NB ENTRANCE	ONE LOOP	A	A	1	360	26	9,360	**93**	03/15/23	100	100-91	Excellent (100-91)		
Dist 2	ALMAAVE	ALMA AVE	010	N. SANBORN ROAD	1ST AVE	R	A	2	2,714	36	97,704	**31**	03/13/23	33	40-31	Poor (50-31)	09/16/19	DEEP PATCH
Dist 2	ALMAAVE	ALMA AVE	020	1ST AVE	WILLIAMS RD	R	A	2	598	36	21,528	**34**	03/13/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	ALMADENDR	ALMADEN DR	10	CUPERTINO WAY	LOS COCHES AVE	R	A	2	259	32	8,308	**23**	02/04/23	25	30-21	Failed (30-0)	04/03/19	DEEP PATCH
Dist 6	ALTURASCIR	ALTURAS CIR	15	LOS COCHES AVE	END	R	A	2	375	32	12,027	**24**	02/08/23	26	30-21	Failed (30-0)		
Dist 6	ALTURASWAY	ALTURAS WAY	10	ALTURAS CIR	TAHOE DR	R	A	2	394	32	12,631	**36**	02/08/23	38	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 5	ALVARADOCT	ALVARADO CT	10	ALVARADO DR (N)	ALVARADO DR (S)	R	A	2	999	32	31,973	**61**	08/15/23	62	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	ALVARADODR	ALVARADO DR	15	SHERMAN DR	END	R	A	2	1,570	32	50,261	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	ALVINCIR	ALVIN CIR	10	W ALVIN DR	END	R	A	2	333	32	10,665	**22**	02/10/23	24	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	AMADORCIR	AMADOR CIR	10	RAINIER DR	END	R	A	2	311	32	9,952	**54**	03/16/23	55	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 1	AMARILLOWA	AMARILLO WAY	010	NOGAL DR	RIDER AVE	R	A	2	875	38	33,250	**50**	02/01/23	52	50-41	Poor (50-31)		
Dist 1	AMARILLOWA	AMARILLO WAY	020	RIDER AVE	PACIFIC AVE	R	A	2	720	32	23,040	**79**	02/01/23	80	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	AMBROSEDR	AMBROSE DR	010	DAVIS RD	W ALISAL ST	R	A	2	2,239	42	94,038	**44**	01/24/23	46	50-41	Poor (50-31)	05/28/19	DEEP PATCH
Dist 3	AMBROSEDR	AMBROSE DR	020	W ALISAL ST	SAN VINCENTE AVE	R	A	2	1,788	37	66,156	**29**	01/24/23	31	30-21	Failed (30-0)	07/05/19	DEEP PATCH
Dist 3	AMHERSTDR	AMHERST DR	10	W ALISAL ST	COLLEGE DR	R	A	2	630	32	20,177	**25**	03/16/23	27	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	ANDERSONAV	ANDERSON AVE	10	SKYWAY BLVD	MERCER WAY	R	A	2	1,045	37	38,680	**6**	01/17/23	9	10-0	Failed (30-0)		
Dist 2	ANDINACIR	ANDINA CIR	10	ANDINA DR	END	R	A	2	190	32	6,080	**41**	03/15/23	42	50-41	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 2	ANDINADR	ANDINA DR	15	COUNTRYSIDE DR	ARGENTINE DR	R	A	2	821	37	30,377	**64**	03/15/23	65	70-61	Fair (70-51)		
Dist 1	ANDOVERCIR	ANDOVER CIR	10	NEWCASTLE DR	END	R	A	2	210	31	6,510	**69**	02/02/23	70	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 4	ANGELUSDR	ANGELUS DR	10	E LAUREL DR	ELWOOD ST	R	A	2	802	32	25,690	**31**	02/17/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	ANNEST	ANNE ST	10	ALEXANDER ST	N. END	R	A	2	410	32	13,120	**27**	03/15/23	29	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	ANTELOPEDR	ANTELOPE DR	15	BADGER WAY	COUGAR DR	R	A	2	765	37	28,305	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 1	ANTIGUAAVE	ANTIGUA AVE	15	RIDER AVE	N SANBORN RD	C	A	2	1,537	37	56,886	**62**	02/03/23	64	70-61	Fair (70-51)		
Dist 1	ANTIGUACIR	ANTIGUA CIR	10	ANTIGUA AVE	END	R	A	2	185	34	6,290	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 5	APACHECIR	APACHE CIR	10	CHEROKEE DR	END	R	A	2	225	32	7,200	**20**	02/16/23	22	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	ARAGONCIR	ARAGON CIR	10	CHEROKEE DR	END	R	A	2	475	32	15,200	**23**	02/10/23	25	30-21	Failed (30-0)	11/07/19	DEEP PATCH
Dist 6	ARCADIACIR	ARCADIA CIR	10	ARCADIA WAY	END	R	A	2	383	32	12,286	**40**	02/04/23	42	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	ARCADIACT	ARCADIA CT	10	ARCADIA WAY (N)	ARCADIA WAY (S)	R	A	2	1,292	32	41,361	**71**	08/15/23	71	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	ARCADIAWAY	ARCADIA WAY	10	EL DORADO DR	COP	C	A	2	590	42	24,780	**74**	08/15/23	74	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	ARCADIAWAY	ARCADIA WAY	15	COP	COP 335' E/O ARCADIA CT (N)	C	A	2	1,610	42	67,620	**56**	02/04/23	58	60-51	Fair (70-51)	03/06/19	DEEP PATCH
Dist 6	ARCADIAWAY	ARCADIA WAY	20	COP 335' E/O ARCADIA CT (N)	NATIVIDAD RD	C	A	2	635	44	27,940	**81**	08/15/23	81	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	ARCADIAWAY	ARCADIA WAY	30	NATIVIDAD RD	GLENDORA WAY	R	A	2	738	37	27,306	**21**	02/04/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	ARCHERST	ARCHER ST	010	BELMONT DR	UNIVERSITY AVE	R	A	2	689	32	22,048	**26**	03/16/23	28	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	ARCHERST	ARCHER ST	020	UNIVERSITY AVE	NACIONAL ST	R	A	2	1,291	32	41,312	**23**	03/16/23	25	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 3	ARCHERST	ARCHER ST	030	NACIONAL ST	VILLA ST	R	P	2	640	40	25,600	**57**	03/16/23	58	60-51	Fair (70-51)		
Dist 3	ARCHERST	ARCHER ST	110	HOMESTEAD AVE	WEST ST	R	P	2	640	40	25,600	**64**	03/16/23	65	70-61	Fair (70-51)		
Dist 3	ARCHERST	ARCHER ST	210	RIKER ST	CAPITOL ST	R	A	2	320	32	10,240	**66**	03/16/23	67	70-61	Fair (70-51)	01/01/01	CAPE SEAL
Dist 3	ARCHERST	ARCHER ST	220	CAPITOL ST	CASSIDY ST	R	C	2	214	38	8,132	**49**	03/16/23	50	50-41	Poor (50-31)	01/01/10	2" OVERLAY
Dist 2	AREZZOCIR	AREZZO CIR	15	SIENA WAY	END	R	A	2	559	32	17,897	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	ARGENTINEC	ARGENTINE CIR	10	ARGENTINE DR	END	R	A	2	219	32	7,008	**57**	03/15/23	58	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 2	ARGENTINED	ARGENTINE DR	010	BARDIN RD	END	R	A	2	1,040	37	38,480	**52**	03/15/23	53	60-51	Fair (70-51)		
Dist 2	ARGENTINEP	ARGENTINE PL	10	ARGENTINE DR	END	R	A	2	435	32	13,920	**53**	03/15/23	54	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 4	ARGUELLOCI	ARGUELLO CIR	10	ARGUELLO DR	END	R	A	2	180	34	6,120	**75**	02/09/23	76	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 4	ARGUELLODR	ARGUELLO DR	15	SANSOME ST	END	R	A	2	890	32	28,480	**84**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	ARTHURCT	ARTHUR CT	10	CLEVELAND AVE	END	R	A	2	316	27	8,544	**35**	03/02/23	37	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 5	ARTHURST	ARTHUR ST	15	CLEVERLAND AVE	END	R	A	2	2,200	32	70,406	**46**	03/02/23	47	50-41	Poor (50-31)		
Dist 5	ASHBURYWAY	ASHBURY WAY	10	ADOBE DR	VICTOR ST	R	A	2	1,056	32	33,817	**19**	03/02/23	21	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	ASPENPL	ASPEN PL	10	WOODSIDE DR	END	R	A	2	175	32	5,600	**34**	01/23/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	ASTORCIR	ASTOR CIR	10	ASTOR WAY	END	R	A	2	226	31	7,006	**80**	08/15/23	80	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	ASTORWAY	ASTOR WAY	15	BROADWAY DR	HUDSON WAY	R	A	2	580	33	19,140	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	ATHERTONCI	ATHERTON CIR	10	ATHERTON WAY	END	R	A	2	349	32	11,186	**34**	02/04/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	ATHERTONWA	ATHERTON WAY	10	MILLBRAE ST	CAMBRIAN DR	R	A	2	1,257	37	46,509	**22**	02/04/23	24	30-21	Failed (30-0)	01/16/19	DEEP PATCH
Dist 6	ATHERTONWA	ATHERTON WAY	20	CAMBRIAN DR	MILLBRAE ST	R	A	2	2,573	37	95,201	**19**	02/04/23	21	20-11	Failed (30-0)	09/16/19	DEEP PATCH
Dist 1	ATLANTICST	ATLANTIC ST	15	GARNER AVE	DEL MONTE AVE	R	A	2	1,546	32	49,472	**44**	02/02/23	46	50-41	Poor (50-31)		
Dist 6	ATTLEBURYC	ATTLEBURY CIR	10	CANTERBURY ST	END	R	A	2	292	32	9,350	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	AUBURNST	AUBURN ST	010	CHURCH ST	CAYUGA ST	R	A	2	321	39	12,519	**35**	01/25/23	37	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	AUBURNST	AUBURN ST	020	CAYUGA ST	CAPITOL ST	R	A	2	310	30	9,300	**28**	01/25/23	30	30-21	Failed (30-0)		
Dist 3	AUBURNST	AUBURN ST	030	CAPITOL ST	WEST ST	R	P	2	615	40	24,600	**28**	01/25/23	29	30-21	Failed (30-0)		
Dist 3	AVELARST	AVELAR ST	10	PINE ST	END	R	C	2	280	32	8,960	**22**	01/20/23	24	30-21	Failed (30-0)	09/01/20	SKIN PATCH
Dist 3	AVENUEA	AVENUE A	10	S MAIN ST	LINCOLN AVE	R	A	2	299	28	8,372	**24**	01/26/23	26	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	AVENUEB	AVENUE B	10	LINCOLN AVE	S MAIN ST	R	A	2	298	37	11,026	**29**	10/29/20	37	30-21	Failed (30-0)	01/01/86	CAPE SEAL
Dist 2	AVISCT	AVIS CT	10	MARGARET ST	SYCAMORE RD	R	A	2	563	36	20,268	**20**	03/13/23	22	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	AZTECCIR	AZTEC CIR	10	CHEROKEE DR	END	R	A	2	185	32	5,920	**27**	02/16/23	29	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	BADGERWAY	BADGER WAY	15	COUGAR DR	WILLIAMS RD	R	A	2	681	38	25,878	**79**	02/01/23	80	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 1	BAJACIR	BAJA CIR	10	DURANGO ST	END	R	A	2	155	33	5,115	**79**	02/01/23	80	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 5	BALDWINST	BALDWIN ST	10	W LAUREL DR	END	R	A	2	466	38	17,708	**27**	02/16/23	29	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 2	BARBARAPL	BARBARA PL	010	BEVERLY DR	FAIRVIEW AVE	R	A	2	752	35	26,320	**24**	01/18/23	26	30-21	Failed (30-0)		
Dist 5	BARCELONAC	BARCELONA CIR	10	CHEROKEE DR	END	R	A	2	475	32	15,200	**20**	02/10/23	22	20-11	Failed (30-0)	07/29/19	DEEP PATCH
Dist 2	BARDINCIR	BARDIN CIR	010	BARDIN WAY (N)	BARDIN WAY (S)	R	A	2	1,043	32	33,376	**19**	03/15/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	BARDINFRD	BARDIN FRONTAGE RD	010	ALISAL RD	BARDIN RD	C	O	2	525	22	11,550	**92**	03/15/23	100	100-91	Excellent (100-91)	12/01/22	HEAVY REHAB
Dist 2	BARDINRD	BARDIN RD	010	E ALISAL RD	SYCAMORE RD	C	A	4	405	62	25,110	**93**	03/15/23	94	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	BARDINRD	BARDIN RD	015	SYCAMORE RD	TORO AVE	C	O	4	1,645	66	108,570	**92**	03/15/23	94	100-91	Excellent (100-91)	12/01/22	HEAVY REHAB
Dist 2	BARDINRD	BARDIN RD	020	TORO AVE	WILLIAMS RD	C	O	4	675	66	44,550	**93**	03/15/23	95	100-91	Excellent (100-91)	12/01/22	HEAVY REHAB
Dist 2	BARDINWAY	BARDIN WAY	010	BARDIN CIR (N)	WILLIAMS RD	R	A	2	895	32	28,640	**21**	03/15/23	23	30-21	Failed (30-0)	10/31/19	SHALLOW PATCH
Dist 5	BARKLEYDR	BARKLEY DR	10	EISENHOWER ST	LOHMAN ST	R	A	2	513	32	16,436	**32**	03/02/23	34	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	BAUTISTADR	BAUTISTA DR	10	ORANGE DR	W ROMIE LN	R	A	2	563	32	18,016	**43**	01/23/23	45	50-41	Poor (50-31)	07/16/19	DEEP PATCH
Dist 3	BAUTISTADR	BAUTISTA DR	20	W ROMIE LN	W ACACIA ST	R	A	2	872	32	27,904	**51**	01/23/23	52	60-51	Fair (70-51)	02/26/19	DEEP PATCH
Dist 3	BAYWOODPL	BAYWOOD PL	10	WOODSIDE DR	END	R	A	2	393	32	12,599	**35**	01/23/23	37	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 6	BEACONHILL	BEACON HILL CIR	10	BEACON HILL DR	SW END	R	A	2	180	32	5,791	**77**	01/24/23	79	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	BEACONHIL1	BEACON HILL DR	10	CONSTITUTION BLVD	ROCKPORT WAY	C	A	2	1,033	42	43,386	**76**	01/24/23	78	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	BEACONHIL1	BEACON HILL DR	20	ROCKPORT WAY	BOSTON ST	C	A	2	1,528	42	64,176	**76**	01/24/23	78	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 1	BEACONHIL	BEACON HILL DR	20	CONSTITUTION BLVD	END	R	A	2	570	42	23,940	**76**	01/24/23	78	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	BEACONHIL1	BEACON HILL DR	30	BOSTON ST	CONSTITUTION BLVD	C	A	2	1,050	42	44,100	**77**	01/24/23	79	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 3	BEDFORDDR	BEDFORD DR	15	COLUMBIA AVE	CAMDEN AVE	R	A	2	1,475	32	47,200	**38**	01/25/23	40	40-31	Poor (50-31)	04/20/21	SKIN PATCH
Dist 2	BEECHST	BEECH ST	010	GARNER AVE	ACOSTA ST (SW END)	R	A	2	1,810	52	94,120	**23**	03/13/23	25	30-21	Failed (30-0)	07/06/20	SKIN PATCH
Dist 3	BELAIRWAY	BEL AIR WAY	10	W ACACIA ST	FAIRFAX DR	R	A	2	423	32	13,558	**17**	01/25/23	19	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	BELLAGIOWA	BELLAGIO WAY	10	CAMPANIA WAY	PALERMO DR	R	A	2	641	32	20,512	**89**	03/15/23	90	90-81	Good (90-71)		
Dist 3	BELLARMINE	BELLARMINE DR	10	W ALISAL ST	PALMA DR	R	A	2	978	32	31,320	**37**	01/24/23	39	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 2	BELLEHAVEN	BELLEHAVEN ST	15	WILLIAMS RD	TOWT ST	R	A	2	1,684	32	53,900	**18**	03/13/23	20	20-11	Failed (30-0)	02/27/19	DEEP PATCH
Dist 3	BELMONTDR	BELMONT DR	15	MELROSE DR	ARCHER ST	R	A	2	1,097	32	35,135	**29**	03/16/23	31	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 6	BENNINGTON	BENNINGTON CT	15	BOSTON ST (N)	BOSTON ST (S)	R	A	2	856	34	29,104	**73**	02/02/23	74	80-71	Good (90-71)		
Dist 6	BERKSHIREW	BERKSHIRE WAY	15	CAPE COD WAY	BOSTON ST	R	A	2	701	32	22,432	**75**	02/02/23	76	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 1	BERMUDAWAY	BERMUDA WAY	10	RIDER AVE	PACIFIC AVE	R	A	2	720	32	23,055	**76**	02/02/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	BERNARDOAV	BERNARDO AVE	15	LA MANCHA WAY	FREEDOM PKWY	R	A	2	1,500	37	55,500	**76**	02/03/23	77	80-71	Good (90-71)		
Dist 1	BERNARDOCI	BERNARDO CIR	10	BERNARDO AVE	END	R	A	2	336	32	10,772	**79**	02/03/23	80	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 2	BEVERLYDR	BEVERLY DR	15	FAIRVIEW AVE	FLORENCE PL	R	A	2	1,345	32	43,051	**39**	01/18/23	41	40-31	Poor (50-31)		
Dist 1	BISONCIR	BISON CIR	10	BISON WAY	END	R	A	2	186	33	6,142	**79**	02/01/23	80	80-71	Good (90-71)	04/16/19	SLURRY SEAL
Dist 1	BISONWAY	BISON WAY	15	EAGLE DR	BUCKHORN DR	R	A	2	1,113	33	36,729	**79**	02/01/23	80	80-71	Good (90-71)	04/16/19	SLURRY SEAL
Dist 3	BLANCOCIR	BLANCO CIR	10	E BLANCO RD	END	R	A	2	980	50	49,000	**29**	01/18/23	31	30-21	Failed (30-0)	10/28/19	DEEP PATCH
Dist 4	BLOCKAVE	BLOCK AVE	15	KIP DR	PARSONS AVE	R	A	2	1,234	38	46,892	**28**	02/09/23	30	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 1	BOBCATWAY	BOBCAT WAY	10	ANTELOPE DR	COUGAR DR	R	A	2	762	34	25,908	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 6	BOCAWAY	BOCA WAY	10	EMERALD WAY	TAHOE DR	R	A	2	264	32	8,478	**34**	02/04/23	36	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 5	BOEINGAVE	BOEING AVE	15	RODEO AVE	NAVAJO DR	R	A	2	1,600	36	57,603	**24**	02/16/23	26	30-21	Failed (30-0)	04/05/19	DEEP PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 4	BOLEROAVE	BOLERO AVE	15	E LAUREL DR	CHAPARRAL ST	R	A	2	1,793	32	57,377	**41**	02/09/23	43	50-41	Poor (50-31)	06/24/19	DEEP PATCH
Dist 2	BOLOGNACT	BOLOGNA CT	10	BOLOGNA WAY (W)	BOLOGNA WAY (E)	R	A	2	737	32	23,584	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	BOLOGNAWAY	BOLOGNA WAY	15	SIENA WAY	PIAZZA DR	R	A	2	782	32	25,054	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	BORONDARD	BORONDA RD	120	135' NW OF N DAVIS RD (CITY LIMIT	N DAVIS RD	R	A	2	135	32	4,320	**66**	03/16/23	67	70-61	Fair (70-51)	04/15/19	SHALLOW PATCH
Dist 5	BORONDARD	BORONDA RD	010EB	N FREEWAY ON RAMP	N MAIN ST	A	A	2	546	66	36,098	**23**	02/10/23	26	30-21	Failed (30-0)	04/15/19	SHALLOW PATCH
Dist 5	BORONDARD	BORONDA RD	010WB	N MAIN ST	N FREEWAY ON RAMP	A	A	2	546	35	19,143	**27**	02/10/23	30	30-21	Failed (30-0)	04/15/19	SHALLOW PATCH
Dist 6	BOSTONCIR	BOSTON CIR	10	BENNINGTON CT	END	R	A	2	220	32	7,040	**69**	02/02/23	70	70-61	Fair (70-51)	04/22/19	SLURRY SEAL
Dist 6	BOSTONST	BOSTON ST	15	BEACON HILL DR	BENNINGTON CT	R	A	2	2,945	32	94,240	**78**	02/02/23	79	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	BOYLECT	BOYLE CT	15	CHRISTENSEN AVE (W)	CHRISTENSEN AVE (E)	R	A	2	1,149	34	39,066	**71**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BRADBURYST	BRADBURY ST	10	END	FITZGERALD ST	R	A	2	2,003	37	74,111	**74**	02/03/23	75	80-71	Good (90-71)		
Dist 3	BRIARWOODP	BRIARWOOD PL	15	END	END	R	A	2	720	32	23,040	**45**	01/23/23	47	50-41	Poor (50-31)		
Dist 4	BRIDGEALY	BRIDGE ALY	10	MARKET WAY	E LAKE ST	R	P	2	561	18	10,111	**52**	03/17/23	53	60-51	Fair (70-51)		
Dist 4	BRIDGEST	BRIDGE ST	10	N MAIN ST	E MENKE ST	R	A	2	680	24	16,320	**15**	03/17/23	17	20-11	Failed (30-0)		
Dist 4	BRIDGEST	BRIDGE ST	20	E MENKE ST	E ROSSI ST	R	A	2	410	30	12,300	**8**	03/17/23	10	10-0	Failed (30-0)	01/02/19	DEEP PATCH
Dist 4	BRIDGEST	BRIDGE ST	30	E ROSSI ST	S END (WALL)	R	P	2	240	24	5,760	**89**	03/16/23	89	90-81	Good (90-71)		
Dist 4	BRIDGEST	BRIDGE ST	40	E LAKE ST	N END (WALL)	R	A	2	95	42	3,990	**55**	03/17/23	56	60-51	Fair (70-51)	01/01/86	CAPE SEAL
Dist 4	BRIDGEST	BRIDGE ST	50	E LAKE ST	MARKET WAY	R	P	2	416	45	18,758	**42**	03/17/23	43	50-41	Poor (50-31)		
Dist 4	BRIGHTONST	BRIGHTON ST	10	STEVENSON ST	FILBERT WAY	R	A	2	478	32	15,300	**45**	03/02/23	46	50-41	Poor (50-31)		
Dist 4	BRIGHTONST	BRIGHTON ST	20	FILBERT WAY	MCALLISTER ST	R	A	2	436	32	13,968	**52**	03/02/23	53	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 6	BRISTOLCIR	BRISTOL CIR	10	BEACON HILL DR	NE END	R	A	2	290	32	9,280	**80**	02/02/23	81	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	BROADWAYDR	BROADWAY DR	15	PENNSYLVANIA DR	HARDEN PKWY	R	A	2	1,203	41	49,323	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	BROOKSRD	BROOKS RD	10	WESTRIDGE PKWY	BORONDA RD	R	A	2	884	32	28,290	**66**	03/16/23	67	70-61	Fair (70-51)		
Dist 3	BRUCEAVE	BRUCE AVE	10	TALBOT ST	COLLEGE DR	R	A	2	779	32	24,946	**32**	01/25/23	34	40-31	Poor (50-31)	09/16/19	DEEP PATCH
Dist 3	BRUCEAVE	BRUCE AVE	20	COLLEGE DR	W ACACIA ST	R	A	2	836	32	26,762	**37**	01/25/23	39	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	BRUNKENAVE	BRUNKEN AVE	10	SPICER ST	CHAMBERLAIN ST	R	A	2	567	42	23,814	**58**	01/18/23	59	60-51	Fair (70-51)		
Dist 3	BRUNKENAVE	BRUNKEN AVE	20	CHAMBERLAIN ST	MALARIN ST	R	A	2	1,012	42	42,504	**26**	01/18/23	28	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 3	BRUNKENAVE	BRUNKEN AVE	30	MALARIN ST	END	R	A	2	855	42	35,910	**54**	01/18/23	55	60-51	Fair (70-51)	01/01/02	SLURRY SEAL
Dist 5	BRUTUSST	BRUTUS ST	15	END (N)	END (S)	R	A	2	1,137	32	36,392	**25**	03/03/23	27	30-21	Failed (30-0)	03/08/19	DEEP PATCH
Dist 4	BRYANTCIR	BRYANT CIR	10	VAN NESS CT	END	R	A	2	260	32	8,320	**53**	02/09/23	54	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 5	BUCHANANWA	BUCHANAN WAY	10	KENNEDY ST (N)	KENNEDY ST (S)	R	A	2	670	32	21,444	**28**	03/02/23	30	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 1	BUCKEYEWAY	BUCKEYE WAY	10	MADRONE DR	NOGAL DR	R	A	2	375	38	14,284	**80**	02/01/23	81	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 1	BUCKHORNDR	BUCKHORN DR	15	RIDER AVE	N SANBORN RD	C	A	2	1,857	37	68,709	**76**	02/01/23	78	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 1	BUCKHORNDR	BUCKHORN DR	25	N SANBORN RD	FALCON RD	C	A	2	945	37	34,965	**79**	02/01/23	81	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 6	BUCKINGHAM	BUCKINGHAM CIR	10	BUCKINGHAM DR	END	R	A	2	168	32	5,384	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BUCKINGHA1	BUCKINGHAM DR	10	CASCADE WAY	DORSET WAY	R	A	2	626	38	23,788	**84**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BUCKINGHA1	BUCKINGHAM DR	20	DORSET WAY	ARCADIA WAY	R	A	2	702	37	25,974	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BUCKINGHA2	BUCKINGHAM WAY	10	EL DORADO DR	BUCKINGHAM DR	R	A	2	169	44	7,436	**84**	08/15/23	84	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	BUENAVISTA	BUENA VISTA ST	10	WILSON ST	PARK ST	R	P	2	637	40	25,488	**53**	03/16/23	54	60-51	Fair (70-51)		
Dist 6	BUNKERHILL	BUNKER HILL WAY	15	CONSTITUTION BLVD	GEORGETOWN WAY	R	A	2	1,245	37	46,065	**78**	02/02/23	79	80-71	Good (90-71)		
Dist 6	BURGUNDYWA	BURGUNDY WAY	15	CABERNET WAY	CHARDONNAY DR	R	A	2	422	37	15,614	**65**	03/01/23	66	70-61	Fair (70-51)		
Dist 1&2	BURKEST	BURKE ST	10	DEL MONTE AVE	END	R	A	2	708	25	17,700	**23**	02/03/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	BURLINGTON	BURLINGTON CIR	10	BURLINGTON DR	END	R	A	2	193	31	5,983	**78**	02/03/23	79	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	BURLINGTO1	BURLINGTON DR	15	PROVINCETOWN DR	END	R	A	2	1,015	37	37,555	**75**	02/03/23	76	80-71	Good (90-71)		
Dist 3	BURTONAVE	BURTON AVE	10	HARKINS RD	END	R	A	2	1,180	42	49,560	**9**	01/17/23	12	10-0	Failed (30-0)	05/21/19	DEEP PATCH
Dist 5	BUSHST	BUSH ST	10	RICO ST	HYDE ST	R	A	2	1,294	32	41,408	**50**	02/09/23	52	50-41	Poor (50-31)		
Dist 4	BUSHST	BUSH ST	20	HYDE ST	S END	R	A	2	210	32	6,720	**46**	02/09/23	48	50-41	Poor (50-31)		
Dist 3	BYRONDR	BYRON DR	10	CHAUCER DR	STEPHANIE DR	R	A	2	857	32	27,433	**52**	01/23/23	54	60-51	Fair (70-51)	05/01/19	SLURRY SEAL
Dist 1	CST	C ST	010	MAE AVE	GALINDO ST	R	A	2	847	32	27,119	**45**	02/03/23	47	50-41	Poor (50-31)		
Dist 4	CETENTR	C.E.T. ENTRANCE	010	NAVAJO DR	END	R	A	2	175	32	5,600	**0**	08/31/17	19	10-0	Failed (30-0)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	CABERNETCI	CABERNET CIR	10	CABERNET WAY	END	R	A	2	190	31	5,890	**68**	03/01/23	69	70-61	Fair (70-51)	02/27/19	DEEP PATCH
Dist 6	CABERNETWA	CABERNET WAY	15	CHARDONNAY DR	BURGUNDY WAY	R	A	2	1,103	33	36,399	**66**	03/01/23	67	70-61	Fair (70-51)		
Dist 6	CABOTWAY	CABOT WAY	15	BEACON HILL DR	BERKSHIRE WAY	R	A	2	766	37	28,342	**77**	02/02/23	78	80-71	Good (90-71)	04/24/19	SLURRY SEAL
Dist 4	CABRILLOAV	CABRILLO AVE	10	TAMPICO AVE	LINWOOD DR	R	A	2	880	32	28,177	**39**	03/16/23	40	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5	CACERASCIR	CACERAS CIR	10	CHEROKEE DR	END	R	A	2	480	32	15,360	**15**	02/10/23	17	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 1	CACHUMACT	CACHUMA CT	10	GAVIOTA DR (W)	GAVIOTA DR (E)	R	A	2	989	34	33,626	**79**	02/03/23	80	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	CACTUSCT	CACTUS CT	10	TUMBLEWEED DR (N)	TUMBLEWEED DR (S)	R	A	2	1,254	32	40,128	**78**	02/01/23	80	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 5	CADIZCIR	CADIZ CIR	10	CHEROKEE DR	END	R	A	2	390	32	12,480	**31**	02/10/23	33	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	CALAVERASD	CALAVERAS DR	15	WEST END	EAST END	R	A	2	3,228	32	103,300	**37**	02/08/23	39	40-31	Poor (50-31)	07/29/19	DEEP PATCH
Dist 3	CALIFORNIA	CALIFORNIA ALY	010	E GABILAN ST	E ALISAL ST	R	P	2	765	20	15,300	**67**	01/20/23	68	70-61	Fair (70-51)		
Dist 3	CALIFORNIA	CALIFORNIA ALY	020	E ALISAL ST	E SAN LUIS ST	R	C	2	668	20	13,361	**62**	11/02/20	67	70-61	Fair (70-51)		
Dist 3	CALIFORNIA	CALIFORNIA ALY	030	E SAN LUIS ST	END	R	A	2	420	18	7,560	**6**	01/20/23	9	10-0	Failed (30-0)		
Dist 4	CALIFORNI1	CALIFORNIA ST	010	S. END	MARKET WAY	R	A	2	166	25	4,150	**44**	03/17/23	45	50-41	Poor (50-31)		
Dist 4	CALIFORNI1	CALIFORNIA ST	020	MARKET WAY	E LAKE ST	R	P	2	635	52	33,020	**34**	03/17/23	35	40-31	Poor (50-31)	04/26/19	DEEP PATCH
Dist 4	CALIFORNI1	CALIFORNIA ST	030	E LAKE ST	E ROSSI ST	R	P	2	155	52	8,060	**43**	03/17/23	44	50-41	Poor (50-31)	04/26/19	DEEP PATCH
Dist 3	CALIFORNI1	CALIFORNIA ST	045	E GABILAN ST	JOHN ST	R	C	2	2,332	46	107,272	**38**	01/20/23	40	40-31	Poor (50-31)		
Dist 3	CALIFORNI1	CALIFORNIA ST	145	E ACACIA ST	E ROMIE LN	C	A	2	611	48	29,328	**23**	01/20/23	27	30-21	Failed (30-0)	04/15/19	DEEP PATCH
Dist 3	CALIFORNI1	CALIFORNIA ST	105A	JOHN ST	MAPLE ST	C	A	2	950	46	43,700	**26**	01/20/23	30	30-21	Failed (30-0)		
Dist 3	CALIFORNI1	CALIFORNIA ST	105B	MAPLE ST	E ACACIA ST	C	P	2	1,625	50	81,250	**57**	01/20/23	58	60-51	Fair (70-51)	11/12/19	DEEP PATCH
Dist 4	CALLECEBU	CALLE CEBU	15	SHERWOOD DR	SUN WAY	R	A	2	1,056	37	39,072	**81**	01/26/23	82	90-81	Good (90-71)	06/03/22	FOG SEAL
Dist 1	CAMARILLOC	CAMARILLO CT	10	MORENO DR (N)	MORENO DR (S)	R	A	2	1,000	33	33,000	**78**	02/03/23	79	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	CAMBRIANDR	CAMBRIAN DR	10	ATHERTON WAY	CUPERTINO WAY	R	A	2	1,320	37	48,840	**26**	02/04/23	28	30-21	Failed (30-0)		
Dist 6	CAMBRIANDR	CAMBRIAN DR	30	CUPERTINO WAY	SAUSAL DR	R	A	2	1,051	37	38,887	**21**	02/04/23	23	30-21	Failed (30-0)		
Dist 6	CAMBRIDGEC	CAMBRIDGE CT	10	WESTMINSTER DR (N)	END	R	A	2	1,389	32	44,464	**71**	02/17/23	72	80-71	Good (90-71)		
Dist 3	CAMDENWAY	CAMDEN WAY	010	BEDFORD DR	W ACACIA ST	R	A	2	215	32	6,880	**39**	01/25/23	41	40-31	Poor (50-31)		
Dist 3	CAMDENWAY	CAMDEN WAY	020	W ACACIA ST	CARMELITA DR	R	A	2	538	32	17,216	**41**	01/25/23	43	50-41	Poor (50-31)		
Dist 1	CAMILLECT	CAMILLE CT	10	ATLANTIC ST	END	R	A	2	194	25	4,850	**61**	02/02/23	62	70-61	Fair (70-51)	01/01/07	CAPE SEAL
Dist 2	CAMPANIACI	CAMPANIA CIR	10	PALERMO DR	EAST END	R	A	2	242	32	7,744	**84**	03/15/23	85	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	CAMPANIAWA	CAMPANIA WAY	15	PALERMO DR	C.O.P.	R	A	2	632	34	21,590	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	CAMPANIAWA	CAMPANIA WAY	20	C.O.P.	WEST END	R	A	2	550	34	18,700	**91**	03/15/23	93	100-91	Excellent (100-91)		
Dist 3	CAMPUSAVE	CAMPUS AVE	010	HASTINGS AVE	LEMOS AVE	R	O	2	675	32	21,600	**95**	06/28/23	100	100-91	Excellent (100-91)	06/28/23	HEAVY REHAB
Dist 3	CAMPUSAVE	CAMPUS AVE	020	LEMOS AVE	FAIRFAX DR	R	O	2	250	31	7,750	**95**	06/28/23	100	100-91	Excellent (100-91)	06/28/23	HEAVY REHAB
Dist 1	CANCUNCIR	CANCUN CIR	10	BERNARDO AVE	END	R	A	2	145	33	4,785	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 2	CANELLICT	CANELLI CT	15	TUSCANY BLVD	CANELLI CT	R	A	2	1,642	33	54,186	**88**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	CANTERBURY	CANTERBURY ST	15	LEXINGTON DR	END	R	A	2	1,215	32	38,883	**77**	02/03/23	78	80-71	Good (90-71)		
Dist 1	CAOBAWAY	CAOBA WAY	10	AMARILLO WAY	NOGAL DR	R	O	2	875	32	28,000	**94**	02/01/23	99	100-91	Excellent (100-91)	10/12/22	LIGHT REHAB
Dist 1	CAOBAWAY	CAOBA WAY	20	AMARILLO WAY	END	R	A	2	169	37	6,253	**7**	02/01/23	10	10-0	Failed (30-0)		
Dist 6	CAPECODWAY	CAPE COD WAY	15	ROCKPORT WAY	CONSTITUTION BLVD	R	A	2	1,142	32	36,554	**79**	02/02/23	80	80-71	Good (90-71)	04/24/19	SLURRY SEAL
Dist 3	CAPISTRANO	CAPISTRANO DR	15	ORANGE DR	W ACACIA ST	R	A	2	1,559	32	49,910	**33**	01/23/23	35	40-31	Poor (50-31)	07/16/19	DEEP PATCH
Dist 3	CAPITOLST	CAPITOL ST	010	W MARKET ST	CENTRAL ST	C	P	2	1,170	40	46,800	**45**	03/15/23	46	50-41	Poor (50-31)		
Dist 3	CAPITOLST	CAPITOL ST	020	CENTRAL AVE	CLAY ST	C	P	2	2,260	40	90,400	**50**	03/15/23	51	50-41	Poor (50-31)	06/14/21	SKIN PATCH
Dist 3	CAPITOLST	CAPITOL ST	030	CLAY ST	END	R	C	2	519	40	20,760	**27**	03/15/23	28	30-21	Failed (30-0)		
Dist 3	CAPITOLST	CAPITOL ST	110	LANG ST	GEIL ST	R	A	2	325	38	12,350	**21**	01/25/23	23	30-21	Failed (30-0)		
Dist 2	CAPRIWAY	CAPRI WAY	15	PIAZZA DR	END	R	A	2	810	32	25,933	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	CARDINAWAY	CARDINA WAY	10	BERNARDO AVE	PALMERA AVE	R	A	2	440	34	14,985	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	CARICT	CARI CT	10	ATLANTIC ST	END	R	A	2	194	25	4,850	**58**	02/02/23	59	60-51	Fair (70-51)	03/11/19	DEEP PATCH
Dist 1	CARIBBEANA	CARIBBEAN AVE	010	HAWAII PL	TAHITI PL	R	A	2	241	32	7,712	**41**	02/02/23	43	50-41	Poor (50-31)		
Dist 1	CARIBBEANA	CARIBBEAN AVE	020	TAHITI PL	PACIFIC AVE	R	A	2	239	32	7,659	**34**	02/02/23	36	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	CARMELAVE	CARMEL AVE	010	MAPLE ST	EL PASO PL	R	P	2	1,263	34	42,942	**60**	01/24/23	61	60-51	Fair (70-51)		
Dist 3	CARMELAVE	CARMEL AVE	020	EL PASO PL	HAWTHORNE ST	R	C	2	694	37	25,678	**24**	01/24/23	26	30-21	Failed (30-0)		
Dist 3	CARMELITAD	CARMELITA DR	010	AMBROSE DR	W ALISAL ST	R	A	2	1,904	32	60,928	**23**	01/24/23	25	30-21	Failed (30-0)		
Dist 3	CARMELITAD	CARMELITA DR	020	W ALISAL ST	PALMA DR	R	A	2	1,050	37	38,850	**31**	01/24/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 2	CAROLDR	CAROL DR	15	FLORENCE PL	END	R	A	2	1,431	32	45,813	**38**	01/18/23	40	40-31	Poor (50-31)		
Dist 4	CARRAVE	CARR AVE	15	E MARKET ST	END	R	A	2	748	38	28,438	**48**	03/13/23	49	50-41	Poor (50-31)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	CARRIAGECT	CARRIAGE CT	10	CARRIAGE DR (N)	CARRIAGE DR (S)	R	A	2	786	32	25,152	**46**	03/15/23	47	50-41	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 2	CARRIAGEDR	CARRIAGE DR	010	COUNTRYSIDE DR	CARRIAGE CT (N)	R	A	2	448	32	14,336	**48**	03/15/23	49	50-41	Poor (50-31)		
Dist 6	CASCADECIR	CASCADE CIR	15	KLAMATH DR	END	R	A	2	491	32	15,739	**36**	02/08/23	38	40-31	Poor (50-31)		
Dist 6	CASCADECT	CASCADE CT	15	KLAMATH DR	CASCADE CIR	R	A	2	958	37	35,446	**40**	02/08/23	42	40-31	Poor (50-31)	03/26/19	DEEP PATCH
Dist 6	CASCADEWAY	CASCADE WAY	15	BUCKINGHAM DR	C.O.P.	R	A	2	225	37	8,325	**84**	08/15/23	84	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	CASCADEWAY	CASCADE WAY	20	C.O.P.	KLAMATH DR	R	A	2	680	37	25,160	**61**	02/08/23	62	70-61	Fair (70-51)		
Dist 4&5	CASENTINIS	CASENTINI ST	10	RICO ST	N MAIN ST	C	A	2	2,331	42	97,941	**63**	03/16/23	65	70-61	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	CASSIDYST	CASSIDY ST	10	CENTRAL AVE	ARCHER ST	R	C	2	320	32	10,240	**28**	03/16/23	29	30-21	Failed (30-0)		
Dist 2	CASSINOCIR	CASSINO CIR	10	CASSINO WAY	END	R	A	2	290	32	9,280	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	CASSINOWAY	CASSINO WAY	15	SPOLETO ST (N)	SPOLETO ST (S)	R	A	2	1,041	37	38,517	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	CASTLETONS	CASTLETON ST	15	LITTLE RIVER DR	END	R	A	2	729	37	26,973	**77**	02/03/23	78	80-71	Good (90-71)		
Dist 5	CASTROST	CASTRO ST	10	N MAIN ST	W LAMAR ST	R	A	2	680	32	21,769	**47**	03/02/23	48	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	CATALINAAV	CATALINA AVE	10	WILSON ST	NACIONAL ST	R	A	2	668	37	24,716	**32**	03/16/23	34	40-31	Poor (50-31)	04/03/19	DEEP PATCH
Dist 1	CAYUCOSCIR	CAYUCOS CIR	10	MORENO DR	END	R	A	2	234	33	7,722	**77**	02/03/23	78	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	CAYUGAST	CAYUGA ST	010	CENTRAL AVE	W GABILAN ST	R	C	2	473	38	17,974	**31**	01/26/23	33	40-31	Poor (50-31)		
Dist 3	CAYUGAST	CAYUGA ST	110	W ALISAL ST	SAN LUIS ST	R	C	2	635	39	24,765	**21**	01/25/23	23	30-21	Failed (30-0)		
Dist 3	CAYUGAST	CAYUGA ST	115	SAN LUIS ST	CLAY ST	R	C	2	445	39	17,355	**32**	01/25/23	34	40-31	Poor (50-31)		
Dist 3	CAYUGAST	CAYUGA ST	120	CLAY ST	S END	R	A	2	290	37	10,730	**27**	01/25/23	29	30-21	Failed (30-0)		
Dist 4	CEDARST	CEDAR ST	10	PARKWAY RD	E MARKET ST	R	A	2	416	36	14,976	**34**	03/03/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 4	CEDARST	CEDAR ST	25	N SANBORN RD	E MARKET ST	R	A	2	397	35	13,895	**28**	03/03/23	30	30-21	Failed (30-0)		
Dist 3	CEDROSAVE	CEDROS AVE	10	NACIONAL ST	END	R	A	2	385	32	12,320	**21**	03/16/23	23	30-21	Failed (30-0)	03/18/19	SHALLOW PATCH
Dist 4	CENTERST	CENTER ST	15	E MARKET ST	EAST ST	R	A	2	906	38	34,428	**49**	03/16/23	50	50-41	Poor (50-31)		
Dist 3	CENTRALAVE	CENTRAL AVE	055	DAVIS RD	UNIVERSITY AVE	C	C	2	882	49	43,218	**52**	01/25/23	54	60-51	Fair (70-51)		
Dist 3	CENTRALAVE	CENTRAL AVE	065	UNIVERSITY AVE	NACIONAL ST	C	C	2	1,475	49	72,275	**37**	01/25/23	39	40-31	Poor (50-31)	12/30/20	SKIN PATCH
Dist 3	CENTRALAVE	CENTRAL AVE	075	NACIONAL ST	HOMESTEAD AVE	C	C	2	1,279	49	62,671	**39**	01/25/23	41	40-31	Poor (50-31)	12/30/20	SKIN PATCH
Dist 3	CENTRALAVE	CENTRAL AVE	085	HOMESTEAD AVE	CAPITOL ST	C	C	2	1,277	49	62,573	**48**	01/25/23	50	50-41	Poor (50-31)		
Dist 3	CENTRALAVE	CENTRAL AVE	095	CAPITOL ST	SALINAS ST	C	C	2	1,299	49	63,651	**56**	08/15/23	56	60-51	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	CENTRALAVE	CENTRAL AVE	180	SALINAS ST	MAIN ST	C	A	2	260	40	10,429	**41**	01/25/23	44	50-41	Poor (50-31)	05/06/19	SHALLOW PATCH
Dist 6	CHABLISCIR	CHABLIS CIR	10	MERLOT WAY	END	R	A	2	259	31	8,029	**66**	03/01/23	67	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 3	CHALONCIR	CHALON CIR	10	W ACACIA ST	END	R	A	2	256	32	8,199	**21**	01/25/23	23	30-21	Failed (30-0)	10/19/20	SKIN PATCH
Dist 3	CHAMBERLAI	CHAMBERLAIN ST	10	BRUNKEN AVE	ABBOTT ST	R	A	2	671	41	27,511	**20**	01/18/23	22	20-11	Failed (30-0)	01/01/02	CAPE SEAL
Dist 1	CHAMISECIR	CHAMISE CIR	10	CHAMISE CT	END	R	A	2	231	32	7,404	**79**	02/01/23	81	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 1	CHAMISEDR	CHAMISE DR	010	BUCKHORN DR	TAMARAK WAY	R	A	2	873	37	32,301	**79**	02/01/23	80	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 1	CHAMISEDR	CHAMISE DR	020	TAMARAK WAY	SAGE CT (S)	R	A	2	899	32	28,768	**79**	02/01/23	80	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 4	CHAPARRALS	CHAPARRAL ST	015	N MAIN ST	LINWOOD DR	C	A	2	3,143	42	132,006	**38**	02/17/23	41	40-31	Poor (50-31)	04/28/21	SLURRY SEAL
Dist 4	CHAPARRALS	CHAPARRAL ST	035	LINWOOD DR	NATIVIDAD RD	C	A	2	2,486	38	94,468	**67**	02/17/23	69	70-61	Fair (70-51)	05/16/19	DEEP PATCH
Dist 6	CHARDONNAY	CHARDONNAY CIR	10	CHARDONNAY DR	END	R	A	2	200	31	6,200	**68**	03/01/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	CHARDONNA1	CHARDONNAY DR	15	CROMWELL DR	MCKINNON ST	R	A	2	2,365	41	96,965	**68**	03/01/23	69	70-61	Fair (70-51)		
Dist 6	CHARLESTOW	CHARLESTOWN WAY	15	BEACON HILL DR	BUNKER HILL WAY	R	A	2	552	37	20,424	**76**	02/02/23	77	80-71	Good (90-71)		
Dist 1	CHARROWAY	CHARRO WAY	10	ALAMO WAY	RIDER AVE	R	A	2	302	38	11,476	**43**	02/02/23	45	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	CHAUCERDR	CHAUCER DR	15	W END	E END	R	A	2	2,011	38	76,418	**58**	01/23/23	60	60-51	Fair (70-51)	05/09/19	SHALLOW PATCH
Dist 6	CHELSEACT	CHELSEA CT	10	WIMBLEDON AVE (W)	WIMBLEDON AVE (E)	R	A	2	1,476	32	47,232	**60**	02/08/23	61	60-51	Fair (70-51)		
Dist 5	CHEROKEECT	CHEROKEE CT	10	CHEROKEE DR (N)	CHEROKEE DR (S)	R	A	2	1,646	32	52,686	**17**	02/16/23	19	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 5	CHEROKEEDR	CHEROKEE DR	010	N MAIN ST	MADRID ST	C	A	2	2,035	42	85,470	**61**	02/16/23	63	70-61	Fair (70-51)		
Dist 5	CHEROKEEDR	CHEROKEE DR	020	MADRID ST	SEVILLE ST	C	A	2	599	42	25,158	**35**	02/16/23	38	40-31	Poor (50-31)		
Dist 5	CHEROKEEDR	CHEROKEE DR	030	SEVILLE ST	DURAN ST	C	A	2	581	42	24,402	**53**	02/16/23	55	60-51	Fair (70-51)		
Dist 5	CHEROKEEDR	CHEROKEE DR	040	DURAN ST	W ALVIN DR	C	A	2	1,324	42	55,608	**41**	02/16/23	44	50-41	Poor (50-31)		
Dist 5	CHEROKEEDR	CHEROKEE DR	050	W AVLIN DR	INCA WAY	C	A	2	883	38	33,554	**63**	02/16/23	65	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 5	CHEROKEEDR	CHEROKEE DR	060	INCA WAY	TULANE ST	C	A	2	2,170	38	82,460	**43**	02/16/23	46	50-41	Poor (50-31)	05/09/19	SLURRY SEAL
Dist 5	CHEROKEEDR	CHEROKEE DR	070	TULANE ST	S END	R	A	2	525	38	19,950	**26**	02/16/23	28	30-21	Failed (30-0)	05/09/19	SLURRY SEAL
Dist 4	CHERRYDR	CHERRY DR	10	SHERWOOD DR	PEACH DR	R	A	2	701	32	22,459	**12**	01/26/23	15	20-11	Failed (30-0)	03/26/19	DEEP PATCH
Dist 6	CHESHIREWA	CHESHIRE WAY	10	BENNINGTON CT	BEACON HILL DR	R	A	2	249	37	9,213	**74**	02/02/23	75	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	CHESTNUTST	CHESTNUT ST	10	S MAIN ST	PAJARO ST	R	C	2	773	43	33,239	**30**	01/20/23	32	30-21	Failed (30-0)		
Dist 3	CHESTNUTST	CHESTNUT ST	20	PAJARO ST	CALIFORNIA ST	R	C	2	691	45	31,095	**47**	01/20/23	48	50-41	Poor (50-31)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	CHESWICKCI	CHESWICK CIR	10	WELLINGTON CT	END	R	A	2	390	32	12,503	**59**	02/02/23	61	60-51	Fair (70-51)	04/23/19	SLURRY SEAL
Dist 6	CHICOWAY	CHICO WAY	10	SISKIYOU DR	CALAVERAS DR	R	A	2	695	32	22,265	**35**	02/08/23	37	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	CHRISTENSE	CHRISTENSEN AVE	15	E ALVIN DR	JULIA AVE	R	A	2	1,888	38	71,744	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	CHURCHST	CHURCH ST	40	CLAY ST	W ALISAL ST	C	C	2	1,117	38	42,446	**41**	01/26/23	43	50-41	Poor (50-31)		
Dist 3	CHURCHST	CHURCH ST	50	W ALISAL ST	CENTRAL AVE	C	A	2	1,142	38	43,396	**55**	08/15/23	55	60-51	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	CHURCHILLC	CHURCHILL CIR	10	CHURCHILL WAY	END	R	A	2	244	33	8,052	**65**	02/08/23	66	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 6	CHURCHILLW	CHURCHILL WAY	15	CROMWELL DR (W)	CROMWELL DR (N)	R	A	2	1,057	33	34,881	**68**	02/08/23	69	70-61	Fair (70-51)		
Dist 4	CIRCLEDR	CIRCLE DR	010	N MADEIRA AVE	N SANBORN RD	C	A	2	2,835	37	104,895	**62**	03/03/23	64	70-61	Fair (70-51)	04/26/19	SLURRY SEAL
Dist 4	CIRCLEDR	CIRCLE DR	015	N SANBORN RD	OREGON ST	C	A	2	1,563	35	54,705	**32**	03/03/23	35	40-31	Poor (50-31)	01/16/19	DEEP PATCH
Dist 4	CIRCLEPL	CIRCLE PL	10	CIRCLE DR	END	R	A	2	678	38	25,764	**37**	03/03/23	39	40-31	Poor (50-31)	06/14/19	DEEP PATCH
Dist 5	CLAREMONTS	CLAREMONT ST	10	ROCHEX AVE	W LAUREL DR	R	A	2	457	32	14,633	**42**	02/16/23	44	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	CLARKST	CLARK ST	15	NACIONAL CT (S)	W MARKET ST	R	A	2	1,356	50	67,831	**49**	03/16/23	50	50-41	Poor (50-31)	03/26/19	DEEP PATCH
Dist 3	CLAYALY	CLAY ALY	10	W SAN LUIS ST	CLAY ST	R	P	2	444	14	6,216	**38**	03/16/23	39	40-31	Poor (50-31)		
Dist 3	CLAYST	CLAY ST	10	S MAIN ST	LINCOLN AVE	A	A	2	363	57	20,691	**27**	01/26/23	30	30-21	Failed (30-0)	02/27/19	DEEP PATCH
Dist 3	CLAYST	CLAY ST	20	LINCOLN AVE	IVERSON ST	C	C	2	1,962	36	70,632	**32**	01/26/23	35	40-31	Poor (50-31)		
Dist 5	CLEVELANDA	CLEVELAND AVE	15	VAN BUREN AVE	LENNY ST	R	A	2	1,212	38	46,056	**29**	03/02/23	31	30-21	Failed (30-0)		
Dist 6	CLINTONCT	CLINTON CT	10	MANHATTAN DR	S END	R	A	2	347	33	11,451	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	CLINTONCT	CLINTON CT	20	MANHATTAN DR at HUDSON WAY	CLINTON CT	R	A	2	895	33	29,535	**84**	08/15/23	84	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	COBBLESTON	COBBLESTONE ST	010	BEACON HILL DR	START ONEWAY LOOP	R	A	2	1,290	34	43,860	**74**	02/02/23	75	80-71	Good (90-71)		
Dist 1	COBBLESTON	COBBLESTONE ST	020	START ONEWAY LOOP	END ONEWAY @ COBBLESTONE	R	A	1	545	26	14,170	**65**	02/02/23	66	70-61	Fair (70-51)		
Dist 4	COITWAY	COIT WAY	10	BRIGHTON ST	W ROSSI ST	R	A	2	156	37	5,772	**33**	03/02/23	35	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	COLERIDGED	COLERIDGE DR	10	LOS OLIVOS ST	RIKER ST	R	A	2	1,411	37	52,207	**67**	01/23/23	68	70-61	Fair (70-51)	05/16/19	SLURRY SEAL
Dist 3	COLERIDGED	COLERIDGE DR	20	RIKER ST	SE END	R	A	2	425	32	13,600	**64**	01/23/23	65	70-61	Fair (70-51)	05/17/19	SLURRY SEAL
Dist 3	COLLEGEDR	COLLEGE DR	010	CAMPUS AVE	W ALISAL ST	R	A	2	1,216	38	46,208	**39**	01/25/23	41	40-31	Poor (50-31)		
Dist 3	COLLEGEDR	COLLEGE DR	020	W ALISAL ST	END	R	A	2	1,481	38	56,278	**26**	01/25/23	28	30-21	Failed (30-0)		
Dist 5	COLTONDR	COLTON DR	15	FLINT WAY	ESTRADA WAY	R	A	2	1,311	32	41,958	**69**	03/02/23	70	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 3	COLUMBIAAV	COLUMBIA AVE	10	HASTINGS AVE	LEMOS AVE	R	A	2	682	32	21,824	**29**	01/25/23	31	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	COLUMBIAAV	COLUMBIA AVE	20	LEMOS AVE	W ACACIA ST	R	A	2	865	32	27,680	**31**	01/25/23	33	40-31	Poor (50-31)		
Dist 5	COLUMBINED	COLUMBINE DR	10	HEATHER DR	LUPIN DR	R	A	2	755	32	24,176	**33**	03/01/23	35	40-31	Poor (50-31)	11/05/19	DEEP PATCH
Dist 6	COLUSAPL	COLUSA PL	10	MENDOCINO DR (W)	MENDOCINO DR (E)	R	A	2	1,470	32	47,040	**21**	02/17/23	23	30-21	Failed (30-0)	03/07/19	DEEP PATCH
Dist 5	COMANCHEWA	COMANCHE WAY	10	SHAWNEE WAY	CHEROKEE DR	R	A	2	786	32	25,161	**26**	02/16/23	28	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	COMMISSION	COMMISSION ST	15	GRIFFIN ST	END	R	A	2	1,489	32	47,659	**26**	01/26/23	28	30-21	Failed (30-0)	07/29/19	DEEP PATCH
Dist 6	COMPTONWAY	COMPTON WAY	15	PESCADERO DR	GLENDORA WAY	R	A	2	535	38	20,356	**23**	03/17/23	25	30-21	Failed (30-0)		
Dist 4	CONNELYCT	CONNELY CT	10	CONNELY ST (W)	CONNELY ST (E)	R	A	2	593	32	18,996	**28**	03/03/23	30	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	CONNELYST	CONNELY ST	15	N SANBORN RD	EUCALYPTUS DR	R	A	2	886	35	31,010	**20**	03/03/23	22	20-11	Failed (30-0)		
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB10	E LAUREL DR	INDEPENDENCE BLVD	A	A	2	3,904	32	124,944	**72**	01/20/23	73	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB20	INDEPENDENCE BLVD	BEACON HILL DR	A	A	2	1,728	32	55,314	**73**	01/20/23	75	80-71	Good (90-71)	05/17/19	DEEP PATCH
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB30	BEACON HILL DR (S)	LAS CASITAS DR	A	A	2	1,002	32	32,095	**76**	01/20/23	78	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB40	LAS CASITAS DR	FREEDOM PKWY	A	A	2	1,202	34	40,868	**67**	01/20/23	69	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB50	FREEDOM PKWY	BEACON HILL DR (N)	A	A	2	840	34	28,560	**62**	01/20/23	64	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB60	BEACON HILL DR (N)	RHODE ISLAND ST	A	A	2	877	34	29,818	**63**	01/20/23	65	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 1	CONSTITUTI	CONSTITUTION BLVD	NB70	RHODE ISLAND ST	E BORONDA RD	A	A	2	640	34	21,760	**76**	01/20/23	77	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1	CONSTITUTI	CONSTITUTION BLVD	SB10	E BORONDA RD	NANTUCKET BLVD	A	A	2	640	34	21,760	**74**	01/20/23	76	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB20	NANTUCKET BLVD	BEACON HILL DR (N)	A	A	2	886	34	30,124	**65**	01/20/23	67	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB30	BEACON HILL DR (N)	FREEDOM PKWY	A	A	2	840	32	26,880	**72**	01/20/23	74	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB40	FREEDOM PKWY	LAS CASITAS DR	A	A	2	1,189	34	40,426	**60**	01/20/23	62	60-51	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB50	LAS CASITAS	BEACON HILL DR (S)	A	A	2	843	34	33,150	**61**	01/20/23	63	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB60	BEACON HILL DR (S)	INDEPENDENCE BLVD	A	A	2	1,729	32	55,328	**74**	01/20/23	75	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB70	INDEPENDENCE BLVD	E LAUREL DR	A	A	2	3,904	32	124,944	**68**	01/20/23	70	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 5	COOLIDGEST	COOLIDGE ST	10	HOOVER ST	TAYLOR ST	R	A	2	494	32	15,816	**43**	03/02/23	44	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 2	COOPERAVE	COOPER AVE	10	2ND AVE	TOWT ST	R	A	2	472	35	16,520	**23**	03/13/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	CORNELLAVE	CORNELL AVE	10	HASTINGS AVE	LEMOS AVE	R	A	2	681	32	21,815	**32**	01/25/23	34	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	CORONADOAV	CORONADO AVE	10	WILSON ST	SANTA BARBARA AVE	R	A	2	536	32	17,167	**44**	03/16/23	45	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 2	CORTEZST	CORTEZ ST	15	NEW DEAL ST	END	R	A	2	1,045	32	33,440	**22**	02/03/23	24	30-21	Failed (30-0)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	CORTINAWAY	CORTINA WAY	10	BERNARDO AVE	PALMERA AVE	R	A	2	593	37	21,941	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	CTTNWDCT	COTTONWOOD CT	10	COTTONWOOD DR (W)	COTTONWOOD DR (E)	R	A	2	895	33	29,535	**67**	02/01/23	68	70-61	Fair (70-51)	04/18/19	SLURRY SEAL
Dist 1	CTTNWDDR	COTTONWOOD DR	010	COTTONWOOD CT	END	R	A	2	1,145	33	37,785	**57**	02/01/23	58	60-51	Fair (70-51)	04/18/19	SLURRY SEAL
Dist 1	CTTNWDWY	COTTONWOOD WAY	010	RIDER AVE	COTTONWOOD DR	R	A	2	429	37	15,873	**78**	02/01/23	79	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 1	COUGARDR	COUGAR DR	15	ANTELOPE DR	FREEDOM PKWY	R	A	2	2,407	37	89,059	**80**	02/01/23	81	80-71	Good (90-71)	04/16/19	SLURRY SEAL
Dist 1	COUGARWAY	COUGAR WAY	10	EAGLE DR	COUGAR DR	R	A	2	244	38	9,272	**79**	02/01/23	80	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 2	COUNTRYSID	COUNTRYSIDE DR	15	BARDIN RD	EAST END	R	A	2	915	40	36,600	**43**	03/15/23	44	50-41	Poor (50-31)		
Dist 6	COVENTRYST	COVENTRY ST	10	BARRICADE (S)	N END	R	A	2	2,130	38	80,940	**73**	02/04/23	74	80-71	Good (90-71)		
Dist 6	COVENTRYST	COVENTRY ST	15	GLENDORA WAY	BARICADE (N)	R	A	2	120	37	4,440	**48**	02/04/23	49	50-41	Poor (50-31)		
Dist 6	CREEKBRIDG	CREEKBRIDGE CIR	10	PROVINCETOWN DR	END	R	A	2	316	32	10,119	**65**	02/03/23	66	70-61	Fair (70-51)		
Dist 5	CRESCENTWA	CRESCENT WAY	15	ADAMS ST	N 1ST ST	R	A	2	2,692	32	86,170	**26**	02/16/23	28	30-21	Failed (30-0)		
Dist 3	CRESPIWAY	CRESPI WAY	10	W ACACIA ST	PALMA DR	R	A	2	887	32	28,411	**27**	01/24/23	29	30-21	Failed (30-0)	03/26/19	DEEP PATCH
Dist 6	CRESTVIEWS	CRESTVIEW ST	15	KITTERY ST	END	R	A	2	1,208	33	39,864	**76**	02/02/23	77	80-71	Good (90-71)		
Dist 6	CRESTVIEWW	CRESTVIEW WAY	10	SNUG HARBOR ST	CRESTVIEW ST	R	A	2	233	32	7,456	**73**	02/02/23	74	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 6	CROMWELLCI	CROMWELL CIR	10	CROMWELL DR	END	R	A	2	128	32	4,104	**68**	02/08/23	69	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 6	CROMWELLDR	CROMWELL DR	15	EL DORADO DR	VICTORIA AVE	R	A	2	1,361	37	50,357	**69**	02/08/23	70	70-61	Fair (70-51)		
Dist 2	CROSSAVE	CROSS AVE	010	E MARKET ST	PALOMA AVE (E)	R	A	2	465	38	17,670	**53**	03/15/23	54	60-51	Fair (70-51)		
Dist 2	CROSSAVE	CROSS AVE	020	E MARKET ST	MIAMI ST	R	A	2	1,809	36	65,124	**39**	03/15/23	41	40-31	Poor (50-31)	08/16/19	DEEP PATCH
Dist 2	CROSSAVE	CROSS AVE	030	MIAMI ST	BARDIN RD	R	A	2	1,086	36	39,096	**49**	03/15/23	50	50-41	Poor (50-31)		
Dist 2	CROSSAVE	CROSS AVE	110	CROSS AVE	PALOMA AVE	R	A	1	225	20	4,500	**62**	03/15/23	63	70-61	Fair (70-51)		
Dist 5	CUEVASCIR	CUEVAS CIR	10	CHEROKEE DR	END	R	A	2	337	32	10,811	**47**	02/10/23	48	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	CUPERTINOW	CUPERTINO WAY	15	MILLBRAE ST	CAMBRIAN DR	R	A	2	2,262	32	72,397	**30**	02/04/23	32	30-21	Failed (30-0)	01/14/19	DEEP PATCH
Dist 3	CYPRESSST	CYPRESS ST	10	CENTRAL AVE	END	R	A	2	238	37	8,806	**18**	01/25/23	20	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 1	DST	D ST	15	MAE AVE	GALINDO ST	R	A	2	851	32	27,261	**37**	02/03/23	39	40-31	Poor (50-31)		
Dist 2	DALLASAVE	DALLAS AVE	10	GARNER AVE	CORTEZ ST	R	O	2	775	36	27,900	**95**	05/29/23	100	100-91	Excellent (100-91)	05/29/23	HEAVY REHAB
Dist 2	DALLASAVE	DALLAS AVE	20	CORTEZ ST	DEL MONTE AVE	R	O	2	770	36	27,720	**95**	05/29/23	100	100-91	Excellent (100-91)	05/29/23	HEAVY REHAB
Dist 6	DANBURYST	DANBURY ST	15	HARTFORD ST	INDEPENDENCE BLVD	R	A	2	751	32	24,060	**75**	02/04/23	76	80-71	Good (90-71)		
Dist 6	DARTMOUTHW	DARTMOUTH WAY	10	E BORONDA RD	S END (BARICADE)	R	A	2	364	41	14,924	**54**	03/01/23	55	60-51	Fair (70-51)		
Dist 3	DAYTONST	DAYTON ST	10	HARKINS RD	END	R	A	2	1,635	42	68,670	**7**	01/17/23	10	10-0	Failed (30-0)	07/05/19	DEEP PATCH
Dist 1	DECUNHACT	DE CUNHA CT	15	DECLARATION ST (N)	DECLARATION ST (S)	R	A	2	2,009	32	64,288	**75**	02/02/23	76	80-71	Good (90-71)	08/07/19	DEEP PATCH
Dist 2	DELATORRE	DE LA TORRE ST	15	ROY DIAZ ST (N)	ROY DIAZ ST (S)	R	A	2	2,121	40	84,851	**51**	01/17/23	53	60-51	Fair (70-51)		
Dist 3	DELAVINAWA	DE LA VINA WAY	10	LOS OLIVOS DR	PASATIEMPO WAY	R	A	2	601	32	19,261	**72**	01/23/23	73	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 6	DECLARATIO	DECLARATION ST	10	BEACON HILL DR	NANTUCKET BLVD	R	A	2	1,488	37	55,056	**79**	02/02/23	80	80-71	Good (90-71)	04/26/19	SLURRY SEAL
Dist 1	DECLARATIO	DECLARATION ST	100	NANTUCKET BLVD	DE CUNHA CT	R	A	2	690	37	25,530	**77**	02/02/23	78	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 4	DEERST	DEER ST	15	N MAIN ST	END	R	A	2	539	25	13,490	**60**	03/01/23	61	60-51	Fair (70-51)		
Dist 3	DELMARDR	DEL MAR DR	15	END	NISSEN RD	R	A	2	1,339	32	42,851	**33**	01/23/23	35	40-31	Poor (50-31)	07/07/20	SKIN PATCH
Dist 1	DELMONTEAV	DEL MONTE AVE	010	RIDER AVE	N SANBORN RD	C	O	2	1,404	42	58,968	**46**	02/02/23	48	50-41	Poor (50-31)	08/09/19	DEEP PATCH
Dist 1&2	DELMONTEAV	DEL MONTE AVE	020	N SANBORN RD	MAE AVE	C	O	2	1,325	42	55,650	**33**	02/02/23	35	40-31	Poor (50-31)	03/11/19	DEEP PATCH
Dist 1&2	DELMONTEAV	DEL MONTE AVE	030	MAE AVE	BURKE ST	C	O	2	885	42	37,170	**41**	02/02/23	43	50-41	Poor (50-31)	01/01/02	2" OVERLAY
Dist 2	DELMONTEAV	DEL MONTE AVE	040	BURKE ST	WILLIAMS RD	C	A	2	1,130	44	49,720	**40**	02/02/23	43	40-31	Poor (50-31)	02/28/19	DEEP PATCH
Dist 2	DELMONTEAV	DEL MONTE AVE	050	WILLIAMS RD	END	R	A	2	1,084	42	45,528	**62**	02/02/23	63	70-61	Fair (70-51)		
Dist 3	DELREYCIR	DEL REY CIR	10	PADRE DR	END	R	A	2	463	32	14,835	**53**	01/23/23	54	60-51	Fair (70-51)	01/01/01	CAPE SEAL
Dist 6	DELANCEYDR	DELANCEY DR	15	BROADWAY DR	END	R	A	2	1,675	37	61,975	**69**	08/15/23	69	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	DENNISAVE	DENNIS AVE	15	TAMPA ST	BARDIN RD	R	A	2	2,180	34	74,120	**56**	03/15/23	57	60-51	Fair (70-51)		
Dist 6	DERBYWAY	DERBY WAY	10	WESTMINSTER DR	HAMPTON ST	R	A	2	258	37	9,546	**74**	02/17/23	75	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	DEVONSHIRE	DEVONSHIRE WAY	10	WESTMINSTER DR	ERCIA ST	R	A	2	1,068	32	34,181	**74**	02/17/23	75	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 2	DEWEYAVE	DEWEY AVE	10	BEECH ST	TOWT ST	R	A	2	412	52	21,424	**16**	03/13/23	18	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	DIABLODR	DIABLO DR	10	E LAUREL DR	ELWOOD ST	R	A	2	790	30	23,723	**31**	02/17/23	33	40-31	Poor (50-31)	01/01/07	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	DICKENSCIR	DICKENS CIR	10	DICKENS DR	END	R	A	2	183	32	5,866	**49**	01/23/23	51	50-41	Poor (50-31)	05/17/19	SLURRY SEAL
Dist 3	DICKENSDR	DICKENS DR	15	KIPLING ST	COLERIDGE DR	R	A	2	740	32	23,680	**47**	01/23/23	49	50-41	Poor (50-31)	10/25/19	SEAL CRACKS
Dist 3	DICKENSDR	DICKENS DR	20	COLERIDGE DR	CHAUCER DR	R	A	2	700	32	22,400	**75**	01/23/23	76	80-71	Good (90-71)	10/25/19	SEAL CRACKS
Dist 4	DIVISIONST	DIVISION ST	10	E MARKET ST	END	R	G	2	230	32	7,360			0	None	Other		
Dist 4	DIVISIONST	DIVISION ST	15	SUMMIT DR	END	R	A	2	151	38	5,751	**56**	03/03/23	57	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 4	DOLORESST	DOLORES ST	10	OREGON ST	KENTUCKY ST	R	A	2	556	35	19,486	**26**	03/03/23	28	30-21	Failed (30-0)	02/08/19	DEEP PATCH
Dist 6	DONNERCIR	DONNER CIR	10	DONNER WAY	END	R	A	2	449	32	14,374	**23**	02/08/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	DONNERWAY	DONNER WAY	15	HUMBOLDT DR	EMERALD DR	R	A	2	804	37	29,748	**37**	02/08/23	39	40-31	Poor (50-31)		
Dist 4	DORORODR	DORORO DR	15	REATA ST	TAPADERO DR	R	A	2	1,067	32	34,166	**50**	02/09/23	52	50-41	Poor (50-31)	03/30/21	SKIN PATCH
Dist 6	DORSETWAY	DORSET WAY	10	BUCKINGHAM DR	LANCASHIRE DR	R	A	2	509	34	17,306	**78**	08/15/23	78	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	DOUGLASAVE	DOUGLAS AVE	10	CRESCENT WAY	N 1ST ST	R	A	2	839	36	30,204	**30**	02/16/23	32	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	DOVERCIR	DOVER CIR	10	DE CUNHA CT	END	R	A	2	200	31	6,200	**51**	02/02/23	52	60-51	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 6	DOWNINGCIR	DOWNING CIR	10	DECLARATION ST	END	R	A	2	379	32	12,153	**60**	02/02/23	62	60-51	Fair (70-51)	04/26/19	SLURRY SEAL
Dist 3	DRIFTWOODP	DRIFTWOOD PL	15	N END	S END	R	A	2	680	32	21,760	**36**	01/23/23	38	40-31	Poor (50-31)		
Dist 5	DURANCIR	DURAN CIR	10	CHEROKEE DR	END	R	A	2	471	32	15,072	**20**	02/10/23	22	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 5	DURANST	DURAN ST	10	CHEROKEE DR	SEVILLE ST	R	A	2	1,052	32	33,664	**17**	02/10/23	19	20-11	Failed (30-0)	03/26/19	DEEP PATCH
Dist 1	DURANGOCIR	DURANGO CIR	10	DURANGO ST	END	R	A	2	150	33	4,950	**76**	02/01/23	77	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 1	DURANGOST	DURANGO ST	15	YUCATAN WAY	ACAPULCO WAY	R	A	2	695	38	26,410	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 3	EACACIAST	E ACACIA ST	010	S. MAIN ST	PAJARO ST	R	C	2	710	34	24,140	**40**	01/20/23	42	40-31	Poor (50-31)		
Dist 3	EACACIAST	E ACACIA ST	020	PAJARO ST	CARMEL AVE	R	P	2	1,479	34	50,286	**54**	01/20/23	55	60-51	Fair (70-51)		
Dist 3	EACACIAST	E ACACIA ST	030	CARMEL AVE	ALAMEDA AVE	R	C	2	476	37	17,612	**23**	01/20/23	25	30-21	Failed (30-0)		
Dist 2	EALISALFRD	E ALISAL FRONTAGE RD	010	BARDIN RD	E ALISAL ST	A	A	2	252	32	8,064	**93**	01/25/23	96	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	EALISALRA	E ALISAL ROUNDABOUT @ SKYWAY	010	WB ENTRANCE	ONE LOOP	A	A	1	360	26	9,360	**93**	03/15/23	100	100-91	Excellent (100-91)		
Dist 2	EALISALST	E ALISAL ST	010	BARDIN/ALISAL RD ROUNDABOUT	MARGARET ST	A	A	2	450	50	22,500	**93**	01/25/23	96	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	EALISALST	E ALISAL ST	020	MARGARET ST	FERN ST	A	A	2	911	53	48,283	**81**	01/25/23	83	90-81	Good (90-71)	12/01/22	SLURRY SEAL
Dist 2	EALISALST	E ALISAL ST	030	FERN ST	TAMPA ST	A	A	2	1,167	53	61,851	**82**	01/25/23	83	90-81	Good (90-71)	12/01/22	SLURRY SEAL
Dist 2	EALISALST	E ALISAL ST	040	TAMPA ST	E MARKET ST	A	A	2	838	42	35,196	**79**	01/25/23	80	80-71	Good (90-71)	05/10/21	DEEP PATCH
Dist 2	EALISALST	E ALISAL ST	050	E MARKET ST	QUILLA ST	A	A	2	1,205	42	50,610	**81**	01/25/23	83	90-81	Good (90-71)	05/10/21	DEEP PATCH
Dist 2	EALISALST	E ALISAL ST	055	QUILLA ST/ SKYWAY BLVD	WILLIAMS RD	A	A	4	617	80	49,360	**66**	01/25/23	68	70-61	Fair (70-51)	01/01/91	CAPE SEAL
Dist 2	EALISALST	E ALISAL ST	060	WILLIAMS RD	TOWT ST	A	A	4	987	67	66,129	**37**	01/25/23	39	40-31	Poor (50-31)	09/30/19	DEEP PATCH
Dist 2&4	EALISALST	E ALISAL ST	070	TOWT ST	N SANBORN RD	A	A	4	1,236	75	92,700	**33**	01/25/23	36	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 2&4	EALISALST	E ALISAL ST	080	N SANBORN RD	N HEBBRON AVE	A	A	4	1,423	75	106,725	**91**	08/15/23	92	100-91	Excellent (100-91)	08/15/23	SCRUB/SLURRY SEAL
Dist 2&4	EALISALST	E ALISAL ST	090	N HEBBRON AVE	N WOOD ST	A	A	4	944	75	70,800	**87**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2&4	EALISALST	E ALISAL ST	100	N WOOD ST	KERN ST	A	A	4	1,427	75	107,025	**84**	08/15/23	84	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	EALISALST	E ALISAL ST	140	FRONT ST	MAIN ST	A	A	4	1,700	64	108,800	**80**	01/25/23	81	80-71	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3&4	EALISALST	E ALISAL ST	110WB	KERN ST	START PCC W/O PRADER ST	A	A	2	1,865	28	52,220	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3&4	EALISALST	E ALISAL ST	120WB	START PCC W/O PRADER	END PCC E/O FRONT ST	A	P	2	475	28	13,300	**86**	01/25/23	86	90-81	Good (90-71)		
Dist 3	EALISALST	E ALISAL ST	130WB	END PCC E/O FRONT ST	FRONT ST	A	A	2	270	24	6,480	**81**	01/25/23	82	90-81	Good (90-71)	01/01/99	SLURRY SEAL
Dist 3	EALISALST	E ALISAL ST	150EB	FRONT ST	START PCC E/O FRONT	A	A	2	270	26	7,020	**81**	01/25/23	82	90-81	Good (90-71)		
Dist 3&4	EALISALST	E ALISAL ST	160EB	START PCC E/O FRONT ST	END PCC	A	P	2	475	28	13,300	**80**	01/25/23	81	80-71	Good (90-71)		
Dist 3&4	EALISALST	E ALISAL ST	170EB	END PCC	KERN ST	A	A	2	1,865	28	52,220	**76**	08/15/23	77	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4&6	EALVINDR	E ALVIN DR	15	N MAIN ST	MCKINNON ST	A	A	4	2,314	62	143,468	**80**	01/25/23	82	80-71	Good (90-71)	04/28/21	SLURRY SEAL
Dist 4&6	EALVINDR	E ALVIN DR	25	MCKINNON ST	LINWOOD DR	A	A	4	1,678	64	107,392	**80**	01/25/23	82	80-71	Good (90-71)	04/29/21	SLURRY SEAL
Dist 6	EALVINDR	E ALVIN DR	35	LINWOOD DR	EL DORADO DR	A	A	4	790	62	48,980	**81**	01/25/23	82	90-81	Good (90-71)	04/30/21	SLURRY SEAL
Dist 6	EALVINDR	E ALVIN DR	45	EL DORADO DR	MARIN AVE	A	A	4	1,515	62	93,930	**78**	01/25/23	79	80-71	Good (90-71)	04/30/21	SLURRY SEAL
Dist 6	EALVINDR	E ALVIN DR	55	MARIN AVE	NATIVIDAD RD	A	A	4	545	62	33,790	**80**	01/25/23	82	80-71	Good (90-71)	04/30/21	SLURRY SEAL
Dist 4	EBERNALDR	E BERNAL DR	10	SHERWOOD DR	ROSARITA DR	A	P	4	866	54	46,764	**78**	01/25/23	79	80-71	Good (90-71)	02/04/19	DEEP PATCH
Dist 4	EBERNALDR	E BERNAL DR	20	ROSARITA DR	ALPINE DR	A	A	2	1,609	53	85,277	**80**	01/25/23	82	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 4	EBERNALDR	E BERNAL DR	30	ALPINE DR	MAIN ST	A	O	2	471	53	24,963	**80**	01/25/23	81	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 4	EBERNALDR	E BERNAL DR	40	10 E BERNAL DR	S END	R	A	2	264	32	8,448	**65**	03/16/23	66	70-61	Fair (70-51)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	EBLANCORD	E BLANCO RD	EB10	S MAIN ST	PAJARO ST	A	O	2	745	43	32,035	**53**	01/18/23	55	60-51	Fair (70-51)	01/01/06	2" OVERLAY
Dist 3	EBLANCORD	E BLANCO RD	EB20	PAJARO ST	SAN JUAN DR	A	O	2	1,680	36	60,480	**49**	01/18/23	51	50-41	Poor (50-31)	01/01/06	2" OVERLAY
Dist 3	EBLANCORD	E BLANCO RD	EB30	SAN JUAN DR	LA MESA WAY	A	O	2	1,600	36	57,600	**53**	01/18/23	55	60-51	Fair (70-51)	01/01/06	2" OVERLAY
Dist 3	EBLANCORD	E BLANCO RD	EB40	LA MESA WAY	BLANCO CIR	A	O	2	3,483	36	125,388	**52**	01/18/23	54	60-51	Fair (70-51)	01/01/06	2" OVERLAY
Dist 3	EBLANCORD	E BLANCO RD	EB50	BLANCO CIR	ABBOTT ST	A	A	2	970	38	36,860	**51**	01/18/23	53	60-51	Fair (70-51)	01/01/86	SLURRY SEAL
Dist 3	EBLANCORD	E BLANCO RD	WB10	ABBOTT ST	BLANCO CIR	A	A	2	970	36	34,920	**37**	01/18/23	39	40-31	Poor (50-31)	01/01/86	SLURRY SEAL
Dist 3	EBLANCORD	E BLANCO RD	WB20	BLANCO CIR	LA MESA WAY	A	A	2	3,462	34	117,708	**56**	01/18/23	58	60-51	Fair (70-51)		
Dist 3	EBLANCORD	E BLANCO RD	WB30	LA MESA WAY	SAN JUAN DR	A	A	2	1,600	38	60,800	**53**	01/18/23	55	60-51	Fair (70-51)		
Dist 3	EBLANCORD	E BLANCO RD	WB40	SAN JUAN DR	PAJARO ST	A	A	2	1,679	36	60,444	**53**	01/18/23	55	60-51	Fair (70-51)		
Dist 3	EBLANCORD	E BLANCO RD	WB50	PAJARO ST	S MAIN ST	A	A	2	745	42	31,290	**48**	01/18/23	50	50-41	Poor (50-31)		
Dist 5	EBOLIVARST	E BOLIVAR ST	15	N MAIN ST	VAN BUREN AVE	C	A	2	2,014	32	64,469	**36**	03/02/23	39	40-31	Poor (50-31)	07/16/19	DEEP PATCH
Dist 6	EBORONDARD	E BORONDA RD	030	DARTMOUTH WAY	MCKINNON ST	A	A	2	1,534	48	73,632	**56**	01/24/23	58	60-51	Fair (70-51)		
Dist 6	EBORONDARD	E BORONDA RD	040	MCKINNON ST	EL DORADO DR	A	A	2	3,044	45	136,980	**43**	01/24/23	45	50-41	Poor (50-31)		
Dist 6	EBORONDARD	E BORONDA RD	050	EL DORADO DR	NATIVIDAD RD	A	A	2	2,926	45	131,670	**49**	01/24/23	51	50-41	Poor (50-31)		
Dist 6	EBORONDARD	E BORONDA RD	060	NATIVIDAD DR	INDEPENDENCE BVD	A	A	2	2,082	45	93,690	**30**	01/24/23	33	30-21	Failed (30-0)		
Dist 1&6	EBORONDARD	E BORONDA RD	070	INDEPENDENCE BLVD	HEMINGWAY DR	A	A	2	2,199	45	98,955	**43**	01/24/23	45	50-41	Poor (50-31)		
Dist 1	EBORONDARD	E BORONDA RD	080	HEMINGWAY BLVD	CONSTITUTION BLVD	A	A	2	3,738	44	164,472	**29**	01/24/23	32	30-21	Failed (30-0)	01/01/02	SLURRY SEAL
Dist 1	EBORONDARD	E BORONDA RD	090	CONSTITUTION BLVD	RIDER AVE	A	A	2	1,763	45	79,335	**40**	01/24/23	42	40-31	Poor (50-31)	01/01/02	REJUVENATION OIL
Dist 1	EBORONDARD	E BORONDA RD	100	RIDER AVE	MESQUITE DR	A	A	2	1,326	45	59,670	**78**	01/24/23	80	80-71	Good (90-71)	06/03/22	RUBBER
Dist 1	EBORONDARD	E BORONDA RD	110	MESQUITE DR	N SANBORN RD	A	A	2	973	45	43,785	**83**	01/24/23	85	90-81	Good (90-71)	06/03/22	RUBBER
Dist 1	EBORONDARD	E BORONDA RD	120	N SANBORN RD	WILLIAMS RD	A	A	2	2,636	45	118,620	**70**	10/05/23	70	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	EBORONDARD	E BORONDA RD	010EB	N MAIN ST	SAN JUAN GRADE RD	A	A	2	1,684	40	67,360	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 6	EBORONDARD	E BORONDA RD	020EB	SAN JUAN GRADE RD	DARTMOUTH WAY	A	A	2	977	40	39,080	**62**	01/24/23	64	70-61	Fair (70-51)		
Dist 6	EBORONDARD	E BORONDA RD	WB010	DARTMOUTH WAY	SAN JUAN GRADE RD	A	O	2	977	40	39,080	**64**	01/24/23	65	70-61	Fair (70-51)	01/01/10	1-1/2" OVERLAY
Dist 5	EBORONDARD	E BORONDA RD	WB020	SAN JUAN GRADE RD	N MAIN ST	A	A	2	1,684	40	67,360	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 4	ECURTISST	E CURTIS ST	10	N MAIN ST	NOICE DR	R	A	2	341	58	19,786	**30**	02/17/23	32	30-21	Failed (30-0)	01/01/85	SLURRY SEAL
Dist 4	ECURTISST	E CURTIS ST	25	NOICE DR	REATA ST	R	A	2	710	38	26,980	**33**	02/17/23	35	40-31	Poor (50-31)		
Dist 3	EGABILANST	E GABILAN ST	15	MAIN ST	PAJARO ST	R	A	2	676	32	21,639	**31**	01/26/23	33	40-31	Poor (50-31)	03/26/19	DEEP PATCH
Dist 3	EGABILANST	E GABILAN ST	55	PAJARO ST	CALIFORNIA ST	R	A	2	673	49	32,977	**38**	01/26/23	40	40-31	Poor (50-31)		
Dist 4	ELAKEST	E LAKE ST	15	N MAIN ST	CALIFORNIA ST	R	A	2	896	40	35,840	**57**	03/17/23	58	60-51	Fair (70-51)	05/25/22	HEAVY MAINTENANCE
Dist 5	ELAMARST	E LAMAR ST	15	N MAIN ST	SANTA RITA ST	R	A	2	783	40	31,320	**21**	03/02/23	23	30-21	Failed (30-0)	03/07/19	DEEP PATCH
Dist 4	ELAURELDR	E LAUREL DR	005	N MAIN ST	MARYAL DR	A	A	4	1,526	64	97,664	**52**	01/19/23	54	60-51	Fair (70-51)		
Dist 4	ELAURELDR	E LAUREL DR	010	MARYAL DR	LINWOOD DR	A	A	4	852	64	54,528	**48**	01/19/23	50	50-41	Poor (50-31)	11/07/19	DEEP PATCH
Dist 4	ELAURELDR	E LAUREL DR	015	LINWOOD DR	GRANADA AVE	A	A	4	1,128	58	65,424	**42**	01/19/23	44	50-41	Poor (50-31)	11/08/19	DEEP PATCH
Dist 4	ELAURELDR	E LAUREL DR	020	GRANADA AVE	NATIVIDAD RD	A	A	4	645	58	37,410	**58**	01/19/23	60	60-51	Fair (70-51)		
Dist 2&4	ELAURELDR	E LAUREL DR	025	N SANBORN RD	TOWT ST	A	A	2	1,658	42	69,636	**21**	01/19/23	24	30-21	Failed (30-0)	09/06/19	DEEP PATCH
Dist 2	ELAURELDR	E LAUREL DR	035	TOWT ST	WILLIAMS RD	A	A	2	1,686	42	70,812	**43**	01/19/23	45	50-41	Poor (50-31)		
Dist 4&6	ELAURELDR	E LAUREL DR	120EB	NATIVIDAD RD	CONSTITUTION BLVD	A	A	2	1,907	35	66,745	**73**	01/19/23	75	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 4&6	ELAURELDR	E LAUREL DR	120WB	CONSTITUTION BLVD	NATIVIDAD RD	A	A	2	1,907	35	66,745	**68**	01/19/23	70	70-61	Fair (70-51)	06/03/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	130EB	CONSTITUTION BLVD	RANCH VIEW LN/COUNTY FACILITY	A	A	2	1,698	30	50,940	**75**	01/19/23	77	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	130WB	RANCH VIEW LN/COUNTY FACILITY	CONSTITUTION BLVD	A	A	2	1,698	35	59,430	**72**	01/19/23	74	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	140EB	RANCH VIEW LN/COUNTY FACILITY	ST EDWARDS AVE	A	A	2	2,305	30	69,150	**70**	01/19/23	72	70-61	Fair (70-51)	06/03/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	140WB	ST EDWARDS AVE	RANCH VIEW LN/COUNTY FACILITY	A	A	2	2,305	35	80,675	**75**	01/19/23	77	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	150EB	ST EDWARDS AVE	N SANBORN RD	A	A	2	1,390	35	48,650	**75**	01/19/23	77	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	150WB	N SANBORN RD	ST EDWARDS AVE	A	A	2	1,383	30	41,490	**74**	01/19/23	75	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 3	EMARKETST	E MARKET ST	010	MAIN ST	PAJARO ST	A	A	4	755	74	55,870	**40**	02/10/23	42	40-31	Poor (50-31)	03/26/19	DEEP PATCH
Dist 4	EMARKETST	E MARKET ST	040	SHERWOOD DR/ MARKET WAY	SIMAS ST/ GRIFFIN ST	A	A	4	1,550	56	86,800	**66**	01/26/23	68	70-61	Fair (70-51)	02/14/19	DEEP PATCH
Dist 4	EMARKETST	E MARKET ST	050	SIMAS ST/ GRIFFIN ST	KERN ST	A	A	4	1,540	62	95,480	**70**	01/26/23	72	70-61	Fair (70-51)	01/01/02	CAPE SEAL
Dist 4	EMARKETST	E MARKET ST	060	KERN ST	CARR AVE	A	A	4	1,367	62	84,754	**73**	01/26/23	75	80-71	Good (90-71)		
Dist 4	EMARKETST	E MARKET ST	070	CARR AVE	N SANBORN RD	A	A	4	2,470	64	158,080	**73**	01/26/23	74	80-71	Good (90-71)	10/01/10	RECONSTRUCT STRUCTURE (AC)
Dist 4	EMARKETST	E MARKET ST	080	N SANBORN RD	TOWT ST	A	A	4	1,658	60	99,480	**62**	01/26/23	64	70-61	Fair (70-51)	04/03/19	DEEP PATCH
Dist 2	EMARKETST	E MARKET ST	090	TOWT ST	KENNETH AVE	A	A	4	1,732	44	76,208	**77**	01/26/23	78	80-71	Good (90-71)		
Dist 2	EMARKETST	E MARKET ST	100	KENNETH AVE	E ALISAL ST	C	A	2	1,321	56	73,976	**36**	03/13/23	39	40-31	Poor (50-31)	03/26/19	DEEP PATCH
Dist 3	EMARKETST	E MARKET ST	020EB	PAJARO ST	START PCC (E/O GREENFIELD ALL	A	A	2	480	25	12,000	**28**	02/10/23	31	30-21	Failed (30-0)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3&4	EMARKETST	E MARKET ST	025EB	START PCC (E/O GREENFIELD ALL	END PCC (S/O MARKET WAY)	A	P	3	650	38	24,700	**72**	02/10/23	73	80-71	Good (90-71)	02/19/19	DEEP PATCH
Dist 4	EMARKETST	E MARKET ST	030EB	PCC END (S/O MARKET WAY)	MARKET WAY/ SHERWOOD DR	A	A	3	177	40	7,080	**57**	02/10/23	59	60-51	Fair (70-51)		
Dist 4	EMARKETST	E MARKET ST	035EB	END PCC (S/O MARKET WAY)	E MARKET ST	A	A	2	360	28	10,080	**36**	02/10/23	38	40-31	Poor (50-31)		
Dist 4	EMARKETST	E MARKET ST	110WB	MARKET WAY/ SHERWOOD DR	START PCC (S/O MARKET WAY)	A	A	4	177	50	8,850	**29**	02/10/23	32	30-21	Failed (30-0)		
Dist 3&4	EMARKETST	E MARKET ST	120WB	BEGIN PCC (S/O MARKET WAY)	END PCC (E/O GREENFIELD ALLEY	A	P	4	575	48	27,600	**67**	02/10/23	68	70-61	Fair (70-51)		
Dist 3	EMARKETST	E MARKET ST	130WB	END PCC (E/O GREENFIELD ALLEY	PAJARO ST	A	A	2	480	30	14,400	**30**	02/10/23	33	30-21	Failed (30-0)		
Dist 4	EMENKEST	E MENKE ST	10	N MAIN ST	BRIDGE ST	R	A	2	341	42	14,322	**62**	03/17/23	63	70-61	Fair (70-51)	01/01/02	SLURRY SEAL
Dist 3	EROMIELN	E ROMIE LN	010	S MAIN ST	ALAMEDA AVE	A	A	2	2,809	44	123,596	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	EROMIELN	E ROMIE LN	020	ALAMEDA AVE	LOS PALOS DR	A	A	4	1,186	62	73,572	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	EROMIELN	E ROMIE LN	030	LOS PALOS DR	ABBOTT ST	A	C	4	1,766	62	109,492	**94**	08/15/23	96	100-91	Excellent (100-91)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	EROSSIST	E ROSSI ST	15	N MAIN ST	SHERWOOD DR	A	A	2	1,137	58	65,946	**73**	01/20/23	75	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ESANJOAQUI	E SAN JOAQUIN ST	10	S MAIN ST	PAJARO ST	R	C	2	890	36	32,040	**62**	01/19/23	63	70-61	Fair (70-51)		
Dist 3	ESANLUISST	E SAN LUIS ST	050	MAIN ST	FRONT ST	R	P	2	1,699	34	57,766	**40**	03/16/23	41	40-31	Poor (50-31)		
Dist 3	ESANLUISST	E SAN LUIS ST	090	FRONT ST	E END	R	A	2	560	32	17,920	**66**	01/26/23	67	70-61	Fair (70-51)		
Dist 1	EAGLECIR	EAGLE CIR	10	EAGLE DR	END	R	A	2	213	34	7,242	**80**	02/01/23	81	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 1	EAGLEDR	EAGLE DR	10	FALCON DR	COUGAR WAY	R	A	2	938	38	35,644	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 1	EAGLEDR	EAGLE DR	20	COUGAR WAY	EAGLE WAY	R	A	2	1,571	38	59,698	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 1	EAGLEDR	EAGLE DR	30	EAGLE WAY	BISON WAY	R	A	2	1,455	38	55,290	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 1	EAGLEWAY	EAGLE WAY	10	FREEDOM PKWY	EAGLE DR	R	A	2	170	39	6,630	**80**	02/01/23	81	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 4	EASTST	EAST ST	10	N HEBBRON AVE	N FILICE ST	R	A	2	564	41	23,124	**51**	03/13/23	52	60-51	Fair (70-51)		
Dist 4	EASTST	EAST ST	20	N FILICE ST	N SANBORN RD	R	A	2	798	32	25,536	**32**	03/13/23	34	40-31	Poor (50-31)		
Dist 1	EBANOPL	EBANO PL	10	RANCHERO DR	END	R	A	2	203	32	6,525	**45**	02/02/23	47	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 5	EBROCIR	EBRO CIR	10	CHEROKEE DR	END	R	A	2	520	32	16,640	**23**	02/10/23	25	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	EDENST	EDEN ST	10	SCHILLING PL	END	R	O	2	599	41	24,559	**51**	01/17/23	53	60-51	Fair (70-51)	01/15/19	DEEP PATCH
Dist 5	EISENHOWER	EISENHOWER CIR	10	EISENHOWER ST	END	R	A	2	193	32	6,176	**38**	03/02/23	40	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 5	EISENHOWE1	EISENHOWER ST	15	VAN BUREN AVE	RUSSELL RD	R	A	2	2,875	37	106,406	**37**	03/02/23	39	40-31	Poor (50-31)		
Dist 6	ELDORADODR	EL DORADO DR	10	E BORONDA RD	HARDEN PKWY	C	A	2	2,067	41	84,747	**85**	10/05/23	85	90-81	Good (90-71)	10/05/23	CHIP SEAL
Dist 6	ELDORADODR	EL DORADO DR	15	HARDEN PKWY	E ALVIN DR	C	A	2	2,046	61	124,806	**27**	02/09/23	31	30-21	Failed (30-0)	04/28/21	SLURRY SEAL
Dist 3	ELPASOPL	EL PASO PL	15	CARMEL AVE	ALAMEDA AVE	R	P	2	608	32	19,456	**64**	01/24/23	65	70-61	Fair (70-51)		
Dist 6	ELSURAVE	EL SUR AVE	10	PESCADERO DR	CAMBRIAN DR	R	A	2	813	32	26,017	**37**	02/04/23	39	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	ELIOTCIR	ELIOT CIR	10	LEWIS ST	END	R	A	2	140	56	7,840	**79**	02/03/23	80	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	ELIZABETHC	ELIZABETH CIR	10	VICTORIA AVE	END	R	A	2	335	33	11,055	**71**	02/08/23	72	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 1	ELKCIR	ELK CIR	10	ELK DR	END	R	A	2	341	33	11,266	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 1	ELKDR	ELK DR	15	FALCON DR	COUGAR DR	R	A	2	825	38	31,384	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 1	ELKINGTONA	ELKINGTON AVE	10	N SANBORN RD	DEL MONTE AVE	R	A	2	1,758	38	66,832	**36**	02/02/23	38	40-31	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 4	ELLISCIR	ELLIS CIR	10	FULTON WAY	END	R	A	2	214	32	6,865	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	ELMDR	ELM DR	10	RIDER AVE	END	R	A	2	375	23	8,625	**30**	02/02/23	32	30-21	Failed (30-0)	01/01/07	CAPE SEAL
Dist 6	ELMSFORDCI	ELMSFORD CIR	10	FAULKNER ST	END	R	A	2	352	32	11,288	**80**	02/02/23	81	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	ELMSFORDWA	ELMSFORD WAY	10	DECLARATION ST	FAULKNER ST	R	A	2	385	32	12,321	**80**	02/02/23	81	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 4	ELTONPL	ELTON PL	15	N HEBBRON AVE	END	R	A	2	834	29	24,203	**51**	03/13/23	52	60-51	Fair (70-51)		
Dist 3	ELVEECIR	ELVEE CIR	10	WORK ST	S END	R	A	2	379	42	15,918	**70**	01/18/23	71	70-61	Fair (70-51)		
Dist 3	ELVEEDR	ELVEE DR	10	S SANBORN RD	PCC BRIDGE	R	A	2	2,527	24	60,648	**85**	01/18/23	86	90-81	Good (90-71)		
Dist 3	ELVEEDR	ELVEE DR	20	PCC BRIDGE	WORK ST	R	C	2	775	42	32,550	**86**	01/18/23	87	90-81	Good (90-71)		
Dist 4	ELWOODST	ELWOOD ST	15	TAMPICO AVE	LOMA DR	R	A	2	2,182	32	69,852	**32**	02/09/23	34	40-31	Poor (50-31)		
Dist 6	EMERALDDR	EMERALD DR	15	ARCADIA WAY	EMERALD WAY	R	A	2	872	37	32,264	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	EMERALDDR	EMERALD DR	25	EMERALD WAY	DONNER WAY	R	A	2	808	37	29,896	**31**	02/04/23	33	40-31	Poor (50-31)	05/28/21	DEEP PATCH
Dist 6	EMERALDWAY	EMERALD WAY	15	EMERALD DR	PESCADERO DR	R	A	2	575	42	24,150	**35**	02/08/23	37	40-31	Poor (50-31)		
Dist 3	ENCINADADR	ENCINADA DR	10	LA MESA DR	SAN JUAN DR	R	A	2	1,113	37	41,181	**58**	01/19/23	60	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 6	ERCIAST	ERCIA ST	15	HARDEN PKWY	HAMPTON ST	R	A	2	760	41	31,160	**72**	02/17/23	73	80-71	Good (90-71)		
Dist 6	ESSEXCIR	ESSEX CIR	10	WIMBLEDON AVE	END	R	A	2	221	32	7,088	**78**	08/15/23	78	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	ESSEXWAY	ESSEX WAY	10	ESSEX CIR	ARCADIA WAY	R	A	2	254	37	9,398	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 5	ESTRADACT	ESTRADA CT	10	ESTRADA WAY (N)	ESTRADA WAY (S)	R	A	2	1,105	32	35,360	**56**	03/02/23	57	60-51	Fair (70-51)	05/09/19	SLURRY SEAL
Dist 5	ESTRADAWAY	ESTRADA WAY	15	SLOAT DR	END	R	A	2	1,312	32	41,987	**66**	03/02/23	67	70-61	Fair (70-51)	05/09/19	SLURRY SEAL
Dist 1	ESTRELLACT	ESTRELLA CT	10	ESTRELLA WAY	END	R	A	2	205	37	7,585	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	ESTRELLAWA	ESTRELLA WAY	15	FREEDOM PKWY	PASEO GRANDE	R	A	2	920	37	34,045	**77**	02/03/23	78	80-71	Good (90-71)		
Dist 2	ETNACIR	ETNA CIR	10	PALERMO DR	END	R	A	2	290	32	9,280	**87**	03/15/23	88	90-81	Good (90-71)		
Dist 4	EUCALYPTUS	EUCALYPTUS DR	15	N SANBORN RD	E ALISAL ST	R	A	2	2,863	32	91,638	**96**	08/25/23	100	100-91	Excellent (100-91)	08/25/23	6" MILL & FILL (SURFACE RECON)
Dist 3	FAIRFAXCIR	FAIRFAX CIR	10	W ALISAL ST	END	R	A	2	232	32	7,452	**18**	01/25/23	20	20-11	Failed (30-0)	07/11/19	SHALLOW PATCH
Dist 3	FAIRFAXDR	FAIRFAX DR	15	W ALISAL ST	COLUMBIA AVE	R	A	2	2,346	32	75,072	**28**	01/25/23	30	30-21	Failed (30-0)	07/05/19	DEEP PATCH
Dist 2	FAIRHAVENS	FAIRHAVEN ST	15	WILLIAMS RD	TOWT ST	R	A	2	1,687	32	54,012	**24**	03/13/23	26	30-21	Failed (30-0)		
Dist 3	FAIRMONTCI	FAIRMONT CIR	10	FAIRMONT DR	END	R	A	2	139	32	4,448	**23**	01/19/23	25	30-21	Failed (30-0)	06/01/21	SKIN PATCH
Dist 3	FAIRMONTDR	FAIRMONT DR	10	N END	LOS PALOS DR	R	C	2	220	32	7,040	**25**	01/19/23	27	30-21	Failed (30-0)	04/20/21	SKIN PATCH
Dist 3	FAIRMONTDR	FAIRMONT DR	20	LOS PALOS DR	S END	R	C	2	704	32	22,528	**25**	01/19/23	27	30-21	Failed (30-0)		
Dist 2	FAIRVIEWAV	FAIRVIEW AVE	15	S SANBORN RD	CAROL DR	R	A	2	2,020	34	68,680	**32**	01/18/23	34	40-31	Poor (50-31)	03/06/19	DEEP PATCH
Dist 1	FALCONDR	FALCON DR	010	E BORONDA RD	EAGLE DR	R	A	2	1,254	41	51,414	**80**	02/01/23	81	80-71	Good (90-71)	05/21/19	SLURRY SEAL
Dist 1	FALCONDR	FALCON DR	020	EAGLE DR	BISON WAY	R	A	2	440	33	14,520	**80**	02/01/23	81	80-71	Good (90-71)		
Dist 6	FAULKNERCI	FAULKNER CIR	10	LEWIS ST	END	R	A	2	83	66	5,478	**78**	02/03/23	79	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	FAULKNERST	FAULKNER ST	15	FITZGERALD ST	LEWIS ST	R	A	2	800	36	28,800	**78**	02/03/23	79	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 4	FELLCIR	FELL CIR	10	FULTON WAY	END	R	A	2	305	32	9,760	**64**	08/15/23	64	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	FERNST	FERN ST	10	E ALISAL ST	SYCAMORE RD	R	A	2	315	34	10,722	**31**	03/13/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 4	FILBERTWAY	FILBERT WAY	15	BRIGHTON ST	MCCALLISTER ST	R	A	2	255	32	8,160	**25**	03/02/23	27	30-21	Failed (30-0)	05/10/19	SLURRY SEAL
Dist 4	FILBERTWAY	FILBERT WAY	20	MCCALLISTER ST	NORTH END	R	A	2	275	32	8,800	**71**	03/02/23	72	80-71	Good (90-71)	05/10/19	SLURRY SEAL
Dist 5	FILLMOREST	FILLMORE ST	10	VAN BUREN AVE	TRUMAN ST	R	A	2	516	37	19,092	**50**	03/02/23	51	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 6	FITZGERALD	FITZGERALD ST	10	END	HEMINGWAY DR	R	A	2	666	37	24,642	**74**	02/03/23	75	80-71	Good (90-71)		
Dist 6	FITZGERALD	FITZGERALD ST	20	HEMINGWAY DR	FAULKNER ST	R	A	2	831	37	30,747	**79**	02/03/23	80	80-71	Good (90-71)	04/24/19	SLURRY SEAL
Dist 5	FLINTCIR	FLINT CIR	10	LARKIN ST	END	R	A	2	125	32	4,000	**74**	08/15/23	74	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	FLINTWAY	FLINT WAY	10	LARKIN ST	COLTON DR	R	A	2	259	32	8,308	**58**	03/01/23	59	60-51	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 2	FLORENCEPL	FLORENCE PL	15	FAIRVIEW AVE	BEVERLY DR	R	A	2	906	32	29,002	**31**	01/18/23	33	40-31	Poor (50-31)		
Dist 1	FOXGLENWAY	FOX GLEN WAY	15	COBBLESTONE ST (W)	COBBLESTONE ST (E)	R	A	2	870	34	29,580	**77**	02/02/23	78	80-71	Good (90-71)		
Dist 1	FREEDOMPKW	FREEDOM PKWY	010	CONSTITUTION BLVD	BERNARDO AVE	C	A	4	3,212	60	192,720	**75**	02/01/23	77	80-71	Good (90-71)	05/08/19	SLURRY SEAL
Dist 1	FREEDOMPKW	FREEDOM PKWY	020	BERNARDO AVE	ESTRELLA WAY	C	A	4	1,433	60	85,980	**78**	02/01/23	80	80-71	Good (90-71)	05/08/19	SLURRY SEAL
Dist 1	FREEDOMPKW	FREEDOM PKWY	030	ESTRELLA WAY	TOWT ST	C	A	4	510	60	30,600	**75**	02/01/23	77	80-71	Good (90-71)	05/08/19	SLURRY SEAL
Dist 1	FREEDOMPKW	FREEDOM PKWY	040	TOWT STREET	WILLIAMS RD	C	A	4	1,638	60	98,280	**70**	02/01/23	72	70-61	Fair (70-51)	05/08/19	SLURRY SEAL
Dist 2	FREEDOMPKW	FREEDOM PKWY	050	WILLIAMS RD	TUSCANY BLVD	C	A	4	967	41	39,647	**75**	02/01/23	77	80-71	Good (90-71)		
Dist 2	FREEDOMPKW	FREEDOM PKWY	060	TUSCANY BLVD	PADOVA DR	C	A	2	1,167	30	35,010	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	FREEDOMPKW	FREEDOM PKWY	070	PADOVA DR	SCONBERG PKWY	C	A	2	1,241	32	39,712	**93**	02/01/23	94	100-91	Excellent (100-91)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 4	FREMONTST	FREMONT ST	15	N MADEIRA AVE	N HEBBRON AVE	R	A	2	1,837	32	58,805	**47**	03/13/23	48	50-41	Poor (50-31)	03/04/19	DEEP PATCH
Dist 1	FRESAPL	FRESA PL	10	RANCHERO DR	END	R	A	2	157	32	5,034	**77**	02/02/23	78	80-71	Good (90-71)	01/01/08	CAPE SEAL
Dist 3	FRONTST	FRONT ST	040	E MARKET ST (AC START)	E ALISAL ST	A	A	3	763	65	49,595	**29**	02/10/23	31	30-21	Failed (30-0)		
Dist 3	FRONTST	FRONT ST	055	E ALISAL ST	JOHN ST	A	A	4	1,839	60	110,340	**38**	01/19/23	41	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 3	FRONTST	FRONT ST	075	JOHN ST	MAPLE ST	R	P	2	979	32	31,328	**63**	01/20/23	64	70-61	Fair (70-51)		
Dist 3	FRONTST	FRONT ST	010EB	START PCC @ E MARKET ST	END PCC @ FRONT ST	A	P	2	404	20	8,080	**73**	02/10/23	74	80-71	Good (90-71)		
Dist 3	FRONTST	FRONT ST	030NB	PCC START	E MARKET ST	A	P	2	422	26	10,972	**77**	02/10/23	78	80-71	Good (90-71)		
Dist 3	FRONTST	FRONT ST	030SB	E MARKET ST	END OF PCC	A	P	2	367	30	11,010	**74**	02/10/23	75	80-71	Good (90-71)		
Dist 3	FRONTST	FRONT ST	050WB	FORK 436 FT N/O E SALISAL ST	PCC START	A	A	1	594	18	10,692	**22**	02/10/23	25	30-21	Failed (30-0)		
Dist 3	FRONTST	FRONT ST	060WB	PCC START	PCC END	A	P	1	270	18	4,860	**79**	02/10/23	79	80-71	Good (90-71)		
Dist 3	FRONTST	FRONT ST	070WB	PCC END	MERGE TO E MARKET ST	A	A	1	434	18	7,812	**17**	02/10/23	20	20-11	Failed (30-0)		
Dist 4	FULTONWAY	FULTON WAY	15	POWELL ST	STOCKSTON ST	R	A	2	765	32	24,511	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	GALINDOST	GALINDO ST	15	DEL MONTE AVE	END	R	A	2	1,151	32	36,838	**30**	02/03/23	32	30-21	Failed (30-0)		
Dist 6	GAMAYWAY	GAMAY WAY	15	RIESLING WAY	END	R	A	2	1,017	37	37,629	**69**	03/01/23	70	70-61	Fair (70-51)		
Dist 2	GARDENWAY	GARDEN WAY	15	S FILICE ST	MAGNOLIA DR	R	A	2	740	32	23,704	**57**	03/13/23	58	60-51	Fair (70-51)		
Dist 5	GARDENIACI	GARDENIA CIR	10	GARDENIA DR	E END	R	A	2	246	31	7,626	**33**	03/01/23	35	40-31	Poor (50-31)	03/07/19	DEEP PATCH
Dist 5	GARDENIADR	GARDENIA DR	15	W BERNAL DR	LUPIN DR	R	A	2	1,884	32	60,300	**49**	03/01/23	51	50-41	Poor (50-31)	02/27/19	DEEP PATCH
Dist 5	GARFIELDCI	GARFIELD CIR	10	SWANER AVE	END	R	A	2	155	26	4,030	**18**	03/02/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	GARNERALY	GARNER ALY	10	ALMA AVE	GARNER AVE	R	A	2	250	21	5,250	**21**	03/17/23	23	30-21	Failed (30-0)	03/19/19	SHALLOW PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	GARNERAVE	GARNER AVE	010	END	RIDER AVE	R	A	2	1,096	37	40,552	**39**	02/02/23	41	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 1	GARNERAVE	GARNER AVE	020	RIDER AVE	N SANBORN RD	C	A	2	1,394	39	54,366	**58**	02/02/23	60	60-51	Fair (70-51)		
Dist 2	GARNERAVE	GARNER AVE	030	N SANBORN RD	BEECH ST	C	A	2	1,224	42	51,408	**17**	02/02/23	21	20-11	Failed (30-0)	05/21/19	DEEP PATCH
Dist 2	GARNERAVE	GARNER AVE	040	BEECH ST	1ST AVE	C	A	2	1,494	41	61,254	**11**	02/02/23	15	20-11	Failed (30-0)	04/05/19	DEEP PATCH
Dist 2	GARNERAVE	GARNER AVE	050	1ST AVE	WILLIAMS RD	C	A	2	600	41	24,600	**23**	02/02/23	27	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	GARNERPVT	GARNER AVE	110PA	GARNER AVE (CULDESAC NORTH)	GEE STREET (CULDESAC)	R	A	2	1,232	22	27,104	**65**	02/02/23	66	70-61	Fair (70-51)		
Dist 1	GARNERPVT	GARNER AVE	120PB	GARNER AVE PRIVATE A (EAST)	GARNER AVE PRIVATE A (WEST)	R	A	2	585	22	12,870	**70**	02/02/23	71	70-61	Fair (70-51)		
Dist 1	GAVIOTADR	GAVIOTA DR	010	CACHUMA CT (W)	TORONA WAY	R	A	2	834	38	31,692	**79**	02/03/23	80	80-71	Good (90-71)		
Dist 1	GAVIOTADR	GAVIOTA DR	020	TORONA WAY	TECOPA WAY	R	A	2	515	34	17,510	**78**	02/03/23	79	80-71	Good (90-71)		
Dist 5	GEARYCIR	GEARY CIR	10	LARKIN ST	END	R	A	2	420	32	13,440	**65**	08/15/23	65	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	GEEST	GEE ST	10	RIDER AVE	END	R	A	2	590	38	22,420	**33**	02/02/23	35	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	GEILST	GEIL ST	10	IVERSON ST	RIKER ST	R	P	2	1,038	40	41,520	**54**	10/27/20	57	60-51	Fair (70-51)		
Dist 3	GEILST	GEIL ST	20	RIKER ST	S MAIN ST	R	P	2	1,345	40	53,800	**63**	10/27/20	66	70-61	Fair (70-51)		
Dist 4&5	GENEVAWAY	GENEVA WAY	10	POTRERO WAY	VICTOR ST	R	A	2	680	32	21,765	**77**	03/02/23	78	80-71	Good (90-71)	05/10/19	SLURRY SEAL
Dist 2	GENOACIR	GENOA CIR	10	GENOA WAY	END	R	A	2	248	32	7,954	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	GENOAWAY	GENOA WAY	15	AREZZO CIR	MONTE BELLA BLVD	R	A	2	513	32	16,429	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	GEORGETOWN	GEORGETOWN WAY	15	CHARLESTOWN WAY	HARRINGTON CIR	R	A	2	1,638	32	52,417	**80**	02/02/23	81	80-71	Good (90-71)		
Dist 6	GLACIERDR	GLACIER DR	10	PLUMAS WAY	MODOC AVE	R	A	2	1,188	37	43,956	**28**	02/09/23	30	30-21	Failed (30-0)		
Dist 6	GLADSTONEW	GLADSTONE WAY	15	CHARDONNAY DR	END	R	A	2	1,203	33	39,699	**68**	02/08/23	69	70-61	Fair (70-51)		
Dist 6	GLENFALLSC	GLEN FALLS CIR	10	STONY BROOK DR	END	R	A	2	441	32	14,122	**74**	02/03/23	75	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 6	GLENDORAWA	GLENDORA WAY	10	COMPTON WAY	INGLEWOOD ST	R	A	2	1,822	38	69,236	**28**	02/04/23	30	30-21	Failed (30-0)		
Dist 2	GLENWOODCT	GLENWOOD CT	10	ALMA AVE	KIMMEL ST	R	A	2	447	32	14,315	**33**	03/13/23	35	40-31	Poor (50-31)	01/01/08	CAPE SEAL
Dist 3	GONZALESAL	GONZALES ALY	10	E GABILAN ST	E ALISAL ST	R	P	2	672	14	9,408	**61**	03/16/23	62	70-61	Fair (70-51)		
Dist 3	GONZALESAL	GONZALES ALY	20	E ALISAL ST	E SAN LUIS ST	R	P	2	625	15	9,375	**75**	03/16/23	75	80-71	Good (90-71)		
Dist 4	GOUGHWAY	GOUGH WAY	10	POWELL ST	VICTOR ST	R	A	2	221	37	8,212	**73**	03/02/23	74	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 4	GRANADAAVE	GRANADA AVE	15	CHAPARRAL ST	E LAUREL DR	R	A	2	1,794	32	57,422	**33**	02/17/23	35	40-31	Poor (50-31)	07/15/19	DEEP PATCH
Dist 4	GRANADAAVE	GRANADA AVE	35	E LAUREL DR	ROSARITA DR	R	A	2	1,748	32	55,948	**32**	02/17/23	34	40-31	Poor (50-31)	01/02/19	DEEP PATCH
Dist 2	GRANDHAVEN	GRANDHAVEN ST	15	WILLIAMS RD	TOWT ST	R	A	2	1,688	32	54,046	**25**	03/13/23	27	30-21	Failed (30-0)	11/12/19	DEEP PATCH
Dist 6	GREATISLAN	GREAT ISLAND ST	15	BEACON HILL DR	CRESTVIEW ST	R	A	2	1,186	32	37,979	**77**	02/02/23	78	80-71	Good (90-71)		
Dist 2	GREENST	GREEN ST	15	DEL MONTE AVE	GARNER AVE	R	A	2	1,546	32	49,484	**21**	02/03/23	23	30-21	Failed (30-0)	08/19/19	DEEP PATCH
Dist 4	GREENBRIAR	GREENBRIAR WAY	15	SANSOME ST	END	R	A	2	1,060	32	33,938	**81**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	GREENFIELD	GREENFIELD ALY	010	E MARKET ST	E GABILAN ST	R	P	2	470	32	15,040	**78**	01/26/23	78	80-71	Good (90-71)		
Dist 3	GREENFIELD	GREENFIELD ALY	020	E GABILAN ST	E ALISAL ST	R	P	2	671	32	21,472	**57**	01/26/23	58	60-51	Fair (70-51)		
Dist 3	GREENFIELD	GREENFIELD ALY	030	E ALISAL ST	E SAN LUIS ST	R	P	2	670	16	10,720	**80**	01/26/23	80	80-71	Good (90-71)		
Dist 4	GREENWICHW	GREENWICH WAY	15	ARGUELLO DR	SANSOME ST	R	A	2	598	34	20,332	**82**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	GREENWOODP	GREENWOOD PL	010	WOODSIDE DR	SOUTH END	R	A	2	376	32	12,032	**32**	01/23/23	34	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	GREENWOODP	GREENWOOD PL	020	WOODSIDE DR	NORTH END	R	A	2	401	32	12,851	**61**	01/23/23	62	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 3	GRIFFINST	GRIFFIN ST	10	JOHN ST	E ALISAL ST	R	A	2	1,170	37	43,290	**29**	01/26/23	31	30-21	Failed (30-0)	05/16/19	DEEP PATCH
Dist 4	GRIFFINST	GRIFFIN ST	25	E ALISAL ST	E MARKET ST	R	A	2	2,005	38	76,190	**69**	01/26/23	70	70-61	Fair (70-51)		
Dist 3	GROVEST	GROVE ST	010	ALAMEDA AVE	START OF LOOP	R	P	2	360	34	12,240	**66**	01/24/23	67	70-61	Fair (70-51)	02/25/19	DEEP PATCH
Dist 3	GROVEST	GROVE ST	020	START OF LOOP	END OF LOOP	R	A	2	675	32	21,600	**38**	01/24/23	40	40-31	Poor (50-31)		
Dist 3	GROVEST	GROVE ST	110	ALAMEDA AVE	MAPLEWOOD DR	R	A	2	1,075	32	34,400	**36**	01/24/23	38	40-31	Poor (50-31)		
Dist 3	GROVEST	GROVE ST	120	MAPLEWOOD ST	MANOR DR	R	A	2	350	32	11,200	**72**	01/24/23	73	80-71	Good (90-71)		
Dist 6	HAMPTONST	HAMPTON ST	15	HARROD WAY	WESTMINSTER DR	R	A	2	1,212	32	38,813	**75**	02/17/23	76	80-71	Good (90-71)		
Dist 6	HANCOCKCIR	HANCOCK CIR	10	HANCOCK ST	END	R	A	2	305	31	9,455	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	HANCOCKST	HANCOCK ST	15	LEXINGTON DR N. SIDE	LEXINGTON DR S. SIDE	R	A	2	2,612	35	91,420	**72**	02/03/23	73	80-71	Good (90-71)		
Dist 3	HANSENST	HANSEN ST	15	AIRPORT BLVD	HARKINS RD	C	A	2	1,051	62	65,162	**31**	01/17/23	35	40-31	Poor (50-31)	07/23/19	DEEP PATCH
Dist 3	HAPPPL	HAPP PL	10	W MARKET ST	END	R	A	2	256	49	12,544	**57**	03/15/23	58	60-51	Fair (70-51)		
Dist 6	HARDENPKWY	HARDEN PKWY	EB010	N MAIN ST	BROADWAY DR	C	A	2	2,015	28	56,420	**67**	10/05/23	67	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	EB020	BROADWAY DR	MCKINNON ST	C	A	2	1,161	28	32,508	**67**	10/05/23	67	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	EB030	MCKINNON ST	WINDSOR ST	C	A	2	938	28	26,264	**62**	10/05/23	62	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	EB040	WINDSOR ST	EL DORADO DR	C	A	2	1,540	28	43,120	**57**	10/05/23	57	60-51	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	WB010	EL DORADO DR	WINDSOR ST	C	A	2	1,540	28	43,120	**60**	10/05/23	60	60-51	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	WB020	WINDSOR ST	MCKINNON ST	C	A	2	937	28	26,236	**65**	10/05/23	65	70-61	Fair (70-51)	10/05/23	CHIP SEAL

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	HARDENPKWY	HARDEN PKWY	WB030	MCKINNON ST	BROADWAY DR	C	A	2	1,156	28	32,368	**73**	10/05/23	73	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	WB040	BROADWAY DR	N MAIN ST	C	A	2	2,026	28	56,728	**65**	10/05/23	65	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	HARDINGCIR	HARDING CIR	10	HARDING ST	END	R	A	2	215	26	5,590	**25**	02/17/23	27	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	HARDINGST	HARDING ST	15	POLK ST	TYLER ST	R	A	2	1,578	32	50,526	**31**	02/17/23	33	40-31	Poor (50-31)		
Dist 3	HARKINSRD	HARKINS RD	010	SCHILLING PL	ABBOTT ST	C	A	4	1,245	80	99,600	**35**	01/17/23	38	40-31	Poor (50-31)	02/13/19	DEEP PATCH
Dist 3	HARKINSRD	HARKINS RD	020	ABBOTT ST	DAYTON ST	C	A	4	2,372	80	189,760	**50**	01/17/23	53	50-41	Poor (50-31)	02/27/19	DEEP PATCH
Dist 3	HARKINSRD	HARKINS RD	030	DAYTON ST	RR TRACKS	C	A	2	899	47	42,253	**53**	01/17/23	56	60-51	Fair (70-51)		
Dist 3	HARKINSRD	HARKINS RD	040	RR TRACKS	CITY LIMIT	C	A	2	745	70	52,150	**47**	01/17/23	50	50-41	Poor (50-31)		
Dist 3	HARMONYLN	HARMONY LN	10	E SAN LUIS ST	E ALISAL ST	R	P	2	679	15	10,185	**68**	01/26/23	69	70-61	Fair (70-51)		
Dist 6	HARRINGTON	HARRINGTON CIR	15	BEACON HILL DR	END	R	A	2	534	38	20,292	**74**	02/02/23	75	80-71	Good (90-71)		
Dist 3	HARRISPL	HARRIS PL	10	HARRIS RD	END	R	A	2	999	42	41,958	**36**	01/17/23	38	40-31	Poor (50-31)		
Dist 3	HARRISRD	HARRIS RD	10	ABBOTT ST	HARRIS PL	C	A	2	982	45	44,190	**46**	01/17/23	49	50-41	Poor (50-31)	06/06/19	DEEP PATCH
Dist 3	HARRISRD	HARRIS RD	40	HARRIS PL	CITY LIMIT @ 1273' SW HARRIS PL;	C	A	2	1,273	42	53,466	**48**	01/17/23	51	50-41	Poor (50-31)		
Dist 6	HARRODCIR	HARROD CIR	10	HARROD WAY	END	R	A	2	331	33	10,923	**67**	02/17/23	68	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	HARRODWAY	HARROD WAY	15	HAMPTON ST	ERCIA ST	R	A	2	976	33	32,208	**70**	02/17/23	71	70-61	Fair (70-51)		
Dist 2	HARRYETTED	HARRYETTE DR	10	FAIRVIEW AVE	CAROL DR	R	A	2	487	32	15,597	**27**	01/18/23	29	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	HARTFORDST	HARTFORD ST	15	INGLEWOOD ST	COVENTRY ST	R	A	2	1,469	32	47,021	**70**	02/04/23	71	70-61	Fair (70-51)		
Dist 3	HARTNELLST	HARTNELL ST	10	CENTRAL AVE	COLLEGE DR	R	A	2	801	37	29,637	**28**	01/25/23	30	30-21	Failed (30-0)	02/19/19	DEEP PATCH
Dist 6	HARVARDCT	HARVARD CT	10	PENNSYLVANIA DR (W)	PENNSYLVANIA DR (E)	R	A	2	844	33	27,852	**69**	08/15/23	69	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	HARVESTALY	HARVEST ALY	10	WINHAM ST	HARVEST ST	R	P	2	275	15	4,125	**63**	01/20/23	64	70-61	Fair (70-51)		
Dist 3	HARVESTST	HARVEST ST	15	S MAIN ST	E END	R	P	2	2,414	46	111,044	**53**	01/20/23	54	60-51	Fair (70-51)	11/04/19	DEEP PATCH
Dist 3	HASTINGSAV	HASTINGS AVE	25	COLUMBIA AVE	CAMPUS AVE	R	A	2	1,207	32	38,651	**34**	01/25/23	36	40-31	Poor (50-31)		
Dist 2	HAVENALY	HAVEN ALY	010	WEST END	FAIRHAVEN ST	R	A	2	307	16	4,912	**5**	03/13/23	7	10-0	Failed (30-0)		
Dist 2	HAVENALY	HAVEN ALY	020	FAIRHAVEN ST	GRANDHAVEN ST	R	A	2	298	16	4,768	**21**	03/13/23	23	30-21	Failed (30-0)	04/20/21	SKIN PATCH
Dist 2	HAVENALY	HAVEN ALY	030	GRANDHAVEN ST	BELLEHAVEN ST	R	P	2	304	21	6,384	**46**	03/13/23	47	50-41	Poor (50-31)		
Dist 2	HAVENALY	HAVEN ALY	040	BELLEHAVEN ST	N. END	R	P	2	85	21	1,785	**71**	03/13/23	71	80-71	Good (90-71)		
Dist 1	HAWAIIPL	HAWAII PL	10	CARIBBEAN AVE	E END	R	A	2	398	25	9,957	**42**	02/02/23	44	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	HAWTHORNES	HAWTHORNE ST	010	S MAIN ST	PAJARO ST	R	C	2	776	32	24,832	**26**	01/19/23	28	30-21	Failed (30-0)		
Dist 3	HAWTHORNES	HAWTHORNE ST	020	PAJARO ST	CARMEL AVE	R	C	2	1,482	32	47,424	**24**	01/19/23	26	30-21	Failed (30-0)		
Dist 3	HAWTHORNES	HAWTHORNE ST	030	CARMEL AVE	ALAMEDA AVE	R	C	2	561	32	17,952	**25**	01/19/23	27	30-21	Failed (30-0)		
Dist 5	HAYESST	HAYES ST	10	PARKSIDE ST	END	R	A	2	207	37	7,659	**34**	02/16/23	36	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 5	HEATHERDR	HEATHER DR	15	IRIS DR	COLUMBINE DR	R	A	2	724	32	23,188	**29**	03/01/23	31	30-21	Failed (30-0)	03/11/19	DEEP PATCH
Dist 2	HEBBRONALY	HEBBRON ALY	10	S HEBBRON AVE	S FILICE ST	R	P	2	515	20	10,300	**59**	01/19/23	60	60-51	Fair (70-51)		
Dist 1&6	HEMINGWAYD	HEMINGWAY DR	010	E BORONDA RD	NANTUCKET BLVD	C	A	2	921	50	46,050	**69**	02/03/23	71	70-61	Fair (70-51)		
Dist 6	HEMINGWAYD	HEMINGWAY DR	20	NANTUCKET BLVD	FITZGERALD RD	R	A	2	1,093	41	44,813	**79**	02/03/23	80	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 6	HIDDENCREE	HIDDEN CREEK CIR	10	PROVINCETOWN DR	END	R	A	2	188	32	6,036	**64**	02/03/23	65	70-61	Fair (70-51)		
Dist 4	HILLCIR	HILL CIR	10	N MADEIRA AVE	END	R	A	2	174	37	6,438	**68**	03/03/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 4	HILLTOPDR	HILL TOP DR	15	N MADEIRA AVE	SUMMIT DR	R	A	2	1,476	32	47,244	**21**	03/03/23	23	30-21	Failed (30-0)		
Dist 4	HOLADAYAVE	HOLADAY AVE	10	E ALISAL ST	EAST ST	R	A	2	285	41	11,712	**51**	03/16/23	52	60-51	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 1	HOLLYST	HOLLY ST	10	RIDER AVE	END	R	A	2	470	32	15,040	**35**	02/02/23	37	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 6	HOLMESCIR	HOLMES CIR	10	HEMINGWAY DR	END	R	A	2	109	32	3,508	**77**	02/03/23	78	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 3	HOMESTEADA	HOMESTEAD AVE	010	N END	WILSON ST	R	A	2	285	38	10,830	**24**	01/25/23	26	30-21	Failed (30-0)		
Dist 3	HOMESTEADA	HOMESTEAD AVE	020	WILSON ST	CENTRAL AVE	R	P	2	1,230	38	46,740	**36**	01/25/23	37	40-31	Poor (50-31)	01/17/19	DEEP PATCH
Dist 3	HOMESTEADA	HOMESTEAD AVE	030	CENTRAL AVE	W ALISAL ST	R	C	2	1,147	38	43,586	**34**	01/25/23	36	40-31	Poor (50-31)		
Dist 3	HOMESTEADA	HOMESTEAD AVE	040	W ALISAL ST	IVERSON ST	R	C	2	1,255	37	46,435	**30**	01/25/23	32	30-21	Failed (30-0)		
Dist 5	HOOVERST	HOOVER ST	15	EISENHOWER ST	SOUZA WAY	R	A	2	1,394	32	44,623	**45**	03/02/23	46	50-41	Poor (50-31)		
Dist 3	HOWARDST	HOWARD ST	10	SALINAS ST	LINCOLN AVE	R	C	2	225	32	7,200	**19**	01/26/23	21	20-11	Failed (30-0)		
Dist 3	HOWARDST	HOWARD ST	20	LINCOLN AVE	CHURCH ST	R	C	2	270	23	6,210	**21**	01/26/23	23	30-21	Failed (30-0)		
Dist 5	HOWECIR	HOWE CIR	10	HOWE DR	END	R	A	2	300	32	9,600	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	HOWEDR	HOWE DR	15	SHERMAN DR	END	R	A	2	739	32	23,660	**64**	08/15/23	64	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	HUDSONWAY	HUDSON WAY	15	MANHATTAN DR	END	R	A	2	545	33	17,985	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	HUGHESWAY	HUGHES WAY	10	CONSTITUTION BLVD	FOX GLEN WAY	R	A	2	317	38	12,046	**76**	02/02/23	77	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 6	HUMBOLDTDR	HUMBOLDT DR	15	YREKA DR	TRUCKEE WAY	R	A	2	1,548	37	57,276	**44**	02/08/23	46	50-41	Poor (50-31)	02/14/19	DEEP PATCH
Dist 5	HUNTINGTON	HUNTINGTON ST	10	ROCHEX AVE	W LAUREL DR	R	A	2	410	30	12,300	**23**	02/16/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	HYANNISCIR	HYANNIS CIR	10	COVENTRY ST	END	R	A	2	176	32	5,639	**68**	02/04/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 4	HYDECIR	HYDE CIR	10	HYDE ST	END	R	A	2	180	32	5,760	**75**	02/09/23	76	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 4&5	HYDEST	HYDE ST	15	VAN NESS CT	RICO ST	R	A	2	1,269	36	45,704	**29**	03/02/23	31	30-21	Failed (30-0)		
Dist 6	IMPERIALWA	IMPERIAL WAY	10	NAPA WAY	SUTTER ST	R	A	2	617	32	19,766	**31**	02/09/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5	INCAWAY	INCA WAY	15	SHAWNEE WAY	ADAMS ST	R	A	2	981	32	31,398	**19**	02/16/23	21	20-11	Failed (30-0)		
Dist 6	INDEPENDEN	INDEPENDENCE BLVD	NB010	CONSTITUTION BLVD	PROVINCETOWN DR	C	A	2	2,796	19	53,124	**31**	02/03/23	34	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	INDEPENDEN	INDEPENDENCE BLVD	NB020	PROVINCETOWN DR	E BORONDA RD	C	A	2	2,952	28	82,656	**32**	02/03/23	35	40-31	Poor (50-31)	03/06/19	DEEP PATCH
Dist 6	INDEPENDEN	INDEPENDENCE BLVD	SB010	E BORONDA RD	PROVINCETOWN DR	C	A	2	2,952	32	94,464	**28**	02/03/23	31	30-21	Failed (30-0)		
Dist 6	INDEPENDEN	INDEPENDENCE BLVD	SB020	PROVINCETOWN DR	CONSTITUTION BLVD	C	A	2	2,796	18	50,328	**24**	02/03/23	28	30-21	Failed (30-0)		
Dist 3	INDUSTRIAL	INDUSTRIAL ST	10	VERTIN AVE	SANBORN PL	R	A	2	1,027	41	42,107	**19**	01/17/23	21	20-11	Failed (30-0)	01/01/02	SLURRY SEAL
Dist 6	INGLEWOODS	INGLEWOOD ST	10	PESCADERO DR	END	R	A	2	687	37	25,419	**25**	02/04/23	27	30-21	Failed (30-0)		
Dist 6	INGLEWOODS	INGLEWOOD ST	110	COVENTRY ST	END	R	A	2	871	38	33,098	**71**	02/04/23	72	80-71	Good (90-71)		
Dist 6	INYOCIR	INYO CIR	10	MENDOCINO DR	END	R	A	2	250	32	8,014	**33**	02/17/23	35	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 5	IRISALY	IRIS ALY	10	W BERNAL DR	IRIS DR	R	A	2	1,179	20	23,594	**25**	03/01/23	27	30-21	Failed (30-0)		
Dist 5	IRISALY	IRIS ALY	20	IRIS DR	END	R	P	2	844	20	16,887	**54**	03/01/23	55	60-51	Fair (70-51)		
Dist 5	IRISDR	IRIS DR	15	N MAIN ST	LUPIN DR	C	A	2	440	54	23,760	**24**	03/01/23	27	30-21	Failed (30-0)	11/12/19	DEEP PATCH
Dist 5	IRISDR	IRIS DR	35	LUPIN DR	TYLER ST	C	A	2	1,364	38	51,864	**61**	03/01/23	63	70-61	Fair (70-51)	03/11/19	DEEP PATCH
Dist 3	IVERSONCIR	IVERSON CIR	10	IVERSON ST	END	R	A	2	285	32	9,144	**45**	01/23/23	47	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	IVERSONST	IVERSON ST	35	CLAY ST	W ACACIA ST	C	A	2	1,279	58	74,182	**29**	01/23/23	33	30-21	Failed (30-0)		
Dist 3	IVERSONST	IVERSON ST	55	W ACACIA ST	C.O.P.	C	A	2	1,400	44	61,600	**24**	01/23/23	28	30-21	Failed (30-0)		
Dist 3	IVERSONST	IVERSON ST	60	C.O.P.	W BLANCO RD	C	A	2	950	44	41,800	**53**	01/23/23	56	60-51	Fair (70-51)		
Dist 4	IVYST	IVY ST	10	E MARKET ST	GRIFFIN ST	R	A	2	342	32	10,949	**20**	01/18/23	22	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	JACKSONCIR	JACKSON CIR	10	SWANER AVE	END	R	A	2	165	27	4,455	**44**	03/02/23	45	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 5	JACKSONST	JACKSON ST	10	VAN BUREN AVE	SWANER AVE	R	A	2	1,286	32	41,179	**57**	03/02/23	58	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 2	JAMESST	JAMES ST	010	S WOOD ST	SMITH ST	R	A	2	385	41	15,785	**67**	01/19/23	68	70-61	Fair (70-51)		
Dist 2	JAMESST	JAMES ST	020	SMITH ST	S MADEIRA AVE	R	A	2	526	42	22,092	**69**	01/19/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 2	JEANAVE	JEAN AVE	10	CAROL DR	SHARON DR	R	A	2	900	32	28,826	**29**	01/18/23	31	30-21	Failed (30-0)	03/06/19	DEEP PATCH
Dist 4	JEFFERSONS	JEFFERSON ST	10	N HEBBRON AVE	N FILICE ST	R	A	2	562	42	23,619	**50**	03/13/23	51	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 2	JEFFERYAVE	JEFFERY AVE	10	SKYWAY BLVD	MERCER WAY	R	A	2	1,043	36	37,564	**9**	01/17/23	12	10-0	Failed (30-0)		
Dist 2	JOHNCIR	JOHN CIR	10	JOHN ST	END	R	A	2	273	32	8,761	**14**	01/17/23	17	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	JOHNST	JOHN ST	100	SALINAS ST	S. MAIN ST	A	A	2	200	50	10,000	**31**	01/18/23	34	40-31	Poor (50-31)	01/01/02	CAPE SEAL
Dist 2	JOHNST	JOHN ST	110	S WOOD ST	S FILICE ST	A	A	4	1,481	58	85,898	**78**	01/18/23	79	80-71	Good (90-71)	06/11/19	DEEP PATCH
Dist 2	JOHNST	JOHN ST	120	S FILICE ST	S SANBORN RD	A	A	4	981	58	56,898	**73**	01/18/23	75	80-71	Good (90-71)	05/20/19	SLURRY SEAL
Dist 2	JOHNST	JOHN ST	130	S SANBORN RD	MCGOWAN DR	A	A	4	1,251	58	72,558	**77**	01/18/23	78	80-71	Good (90-71)	05/20/19	SLURRY SEAL
Dist 2	JOHNST	JOHN ST	140	MCGOWAN DR	E ALISAL ST	A	A	4	1,433	62	88,846	**75**	01/18/23	76	80-71	Good (90-71)	05/20/19	SLURRY SEAL
Dist 3	JOHNSONAVE	JOHNSON AVE	15	ABBOTT ST	E END	R	A	2	1,040	42	43,680	**24**	01/18/23	26	30-21	Failed (30-0)		
Dist 1	JOSEPHINES	JOSEPHINE ST	15	C ST	END	R	A	2	632	32	20,250	**43**	02/03/23	45	50-41	Poor (50-31)		
Dist 6	JULIAAVE	JULIA AVE	10	WHEELER DR	CHRISTENSEN AVE	R	A	2	661	32	21,164	**74**	08/15/23	74	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	JUNIPEROWA	JUNIPERO WAY	10	W ACACIA ST	PALMA DR	R	A	2	887	32	28,406	**23**	01/24/23	25	30-21	Failed (30-0)	03/26/19	DEEP PATCH
Dist 3	KATHERINEA	KATHERINE AVE	15	S MAIN ST	ALAMEDA AVE	R	A	2	2,803	32	89,721	**31**	01/19/23	33	40-31	Poor (50-31)	12/30/20	SKIN PATCH
Dist 5	KEARNYWAY	KEARNY WAY	10	ALVARADO DR	LARKIN ST	R	A	2	479	36	17,244	**63**	08/15/23	63	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	KENNEDYCIR	KENNEDY CIR	10	KENNEDY ST	END	R	A	2	350	32	11,200	**38**	03/02/23	40	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 5	KENNEDYST	KENNEDY ST	15	VAN BUREN AVE	BUCHANAN WAY	R	A	2	524	37	19,388	**46**	03/02/23	47	50-41	Poor (50-31)	01/14/19	DEEP PATCH
Dist 5	KENNEDYST	KENNEDY ST	35	BUCHANAN WAY	END	R	A	2	1,655	33	54,615	**45**	03/02/23	47	50-41	Poor (50-31)		
Dist 2	KENNETHAVE	KENNETH AVE	010	FAIRHAVEN ST	E LAUREL DR	R	A	2	572	34	19,448	**22**	03/13/23	24	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	KENNETHAVE	KENNETH AVE	020	E LAUREL DR	E MARKET ST	R	O	2	425	36	15,300	**53**	03/13/23	54	60-51	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 6	KENSINGTON	KENSINGTON WAY	15	BUNKER HILL WAY	END	R	A	2	478	37	17,686	**75**	02/02/23	76	80-71	Good (90-71)		
Dist 6	KENTCIR	KENT CIR	10	KENT ST	END	R	A	2	155	34	5,270	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	KENTST	KENT ST	10	KLAMATH DR	KENT CIR	R	A	2	734	37	27,158	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	KENTST	KENT ST	20	KENT CIR	ARCADIA WAY	R	A	2	367	38	13,946	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	KENTFIELDD	KENTFIELD DR	25	LOYOLA DR	SAN JACINTO DR	R	A	2	2,016	32	64,541	**73**	01/24/23	74	80-71	Good (90-71)		
Dist 4	KENTUCKYST	KENTUCKY ST	15	LINDEN ST	TOWT ST	R	A	2	1,267	36	45,646	**29**	03/03/23	31	30-21	Failed (30-0)		
Dist 4	KERNST	KERN ST	10	E ALISAL ST	N FREEWAY OFF RAMP	C	A	2	1,925	39	75,075	**34**	01/25/23	37	40-31	Poor (50-31)	03/07/19	DEEP PATCH
Dist 4	KERNST	KERN ST	20	N FREEWAY OFF RAMP	END	R	A	2	1,081	41	44,330	**54**	01/25/23	56	60-51	Fair (70-51)	10/30/19	SHALLOW PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	KEYST	KEY ST	10	TORO AVE	PALOMA AVE	R	A	2	343	32	10,988	**21**	03/13/23	23	30-21	Failed (30-0)	09/30/19	DEEP PATCH
Dist 1	KILBRETHAV	KILBRETH AVE	10	N SANBORN RD	DEL MONTE AVE	R	A	2	1,666	31	51,646	**32**	02/02/23	34	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 2	KIMMELST	KIMMEL ST	15	N SANBORN RD	BEECH ST	R	A	2	1,224	32	39,189	**25**	03/13/23	27	30-21	Failed (30-0)		
Dist 4	KINGSST	KINGS ST	15	E MARKET ST	E ALISAL ST	R	A	2	1,155	42	48,537	**50**	01/19/23	51	50-41	Poor (50-31)		
Dist 5	KIOWACIR	KIOWA CIR	10	CHEROKEE DR	END	R	A	2	184	32	5,888	**24**	02/16/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	KIPDR	KIP DR	10	BLOCK AVE	E ALVIN DR	R	A	2	756	37	27,972	**19**	02/09/23	21	20-11	Failed (30-0)	11/12/19	DEEP PATCH
Dist 3	KIPLINGST	KIPLING ST	55	RIKER ST	LOS OLIVOS DR	R	A	2	2,803	32	89,708	**57**	01/23/23	58	60-51	Fair (70-51)	05/16/19	SLURRY SEAL
Dist 3	KIRKWOODAV	KIRKWOOD AVE	15	SAN CLEMENTE AVE	VILLA ST	R	A	2	1,139	32	36,456	**25**	03/16/23	27	30-21	Failed (30-0)	07/05/19	DEEP PATCH
Dist 6	KITTERYST	KITTERY ST	15	BEACON HILL DR	FITZGERALD ST	R	A	2	961	32	30,753	**79**	02/02/23	80	80-71	Good (90-71)		
Dist 6	KLAMATHDR	KLAMATH DR	10	ARCADIA WAY	C.O.P.	R	A	2	365	37	13,505	**58**	02/08/23	59	60-51	Fair (70-51)		
Dist 6	KLAMATHDR	KLAMATH DR	20	C.O.P.	CALAVERAS DR	R	A	2	1,815	37	67,155	**37**	02/08/23	39	40-31	Poor (50-31)		
Dist 5	LABREAST	LA BREA ST	10	SEPULVEDA DR	N 1ST ST	R	A	2	443	32	14,203	**40**	02/17/23	42	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	LACANADAWA	LA CANADA WAY	10	LOS OLIVOS DR	LA JOLLA WAY	R	A	2	682	32	21,824	**40**	01/23/23	42	40-31	Poor (50-31)	05/13/19	SLURRY SEAL
Dist 3	LACANADAWA	LA CANADA WAY	20	LA JOLLA WAY	NE END	R	A	2	430	32	13,760	**69**	01/23/23	70	70-61	Fair (70-51)	05/13/19	SLURRY SEAL
Dist 1	LACUESTACT	LA CUESTA CT	10	ANTIGUA AVE (N)	ANTIGUA AVE (S)	R	A	2	1,375	34	46,750	**77**	02/03/23	78	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 2	LAGUARDIAS	LA GUARDIA ST	10	VANDENBERG ST	MOFFETT ST	R	A	2	1,889	41	77,449	**62**	01/17/23	64	70-61	Fair (70-51)	01/01/11	SLURRY SEAL
Dist 1	LAHONDACIR	LA HONDA CIR	10	LA HONDA CT	END	R	A	2	205	32	6,560	**47**	02/02/23	49	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 1	LAHONDACT	LA HONDA CT	010	ALAMO WAY (N)	RANCHERO DR	R	A	2	935	32	29,920	**63**	02/02/23	64	70-61	Fair (70-51)		
Dist 1	LAHONDACT	LA HONDA CT	020	RANCHERO DR	ALAMO WAY (S)	R	A	2	590	38	22,420	**68**	02/02/23	69	70-61	Fair (70-51)		
Dist 3	LAJOLLACIR	LA JOLLA CIR	10	LA JOLLA WAY	END	R	A	2	337	32	10,784	**67**	01/23/23	68	70-61	Fair (70-51)	05/21/19	SLURRY SEAL
Dist 3	LAJOLLAWAY	LA JOLLA WAY	10	LA CANADA WAY	LOS OLIVOS DR	R	A	2	927	32	29,664	**71**	01/23/23	72	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1	LAMANCHACI	LA MANCHA CIR	10	LA MANCHA WAY	END	R	A	2	219	34	7,448	**74**	02/03/23	75	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	LAMANCHAWA	LA MANCHA WAY	15	BERNARDO AVE	PALMERA AVE	R	A	2	566	37	20,956	**75**	02/03/23	76	80-71	Good (90-71)		
Dist 3	LAMESADR	LA MESA DR	050	W END	PAJARO ST	R	A	2	217	37	8,029	**38**	01/18/23	40	40-31	Poor (50-31)	02/14/19	DEEP PATCH
Dist 3	LAMESADR	LA MESA DR	060	PAJARO ST	SAN JUAN DR	R	A	2	1,677	37	62,049	**46**	01/18/23	48	50-41	Poor (50-31)	05/16/19	DEEP PATCH
Dist 3	LAMESADR	LA MESA DR	070	SAN JUAN DR	LA MESA WAY	R	A	2	1,597	37	59,089	**42**	01/18/23	44	50-41	Poor (50-31)	05/16/19	DEEP PATCH
Dist 3	LAMESADR	LA MESA DR	080	LA MESA WAY	SAN ANGELO DR	R	A	2	1,433	37	53,021	**37**	01/18/23	39	40-31	Poor (50-31)	03/07/19	DEEP PATCH
Dist 3	LAMESAWAY	LA MESA WAY	10	LA MESA DR	E BLANCO RD	R	A	2	135	37	4,995	**18**	01/18/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	LAMIRADACT	LA MIRADA CT	10	LA MIRADA DR (N)	LA MIRADA DR (N)	R	A	2	1,124	32	35,968	**24**	01/19/23	26	30-21	Failed (30-0)	01/23/19	SHALLOW PATCH
Dist 3	LAMIRADADR	LA MIRADA DR	15	SAN BRUNO WAY	LA MESA DR	R	A	2	1,125	32	36,002	**20**	01/19/23	22	20-11	Failed (30-0)		
Dist 4	LAPOSADADR	LA POSADA DR	15	END (N)	END (S)	R	A	2	473	25	11,842	**74**	02/17/23	75	80-71	Good (90-71)		
Dist 4	LAPOSADAWA	LA POSADA WAY	10	SHERWOOD DR	LA POSADA DR	R	A	2	135	32	4,320	**18**	02/17/23	20	20-11	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 3	LACEYLN	LACEY LN	10	E GABILAN ST	MONTEREY ST	R	P	2	265	15	3,975	**87**	03/16/23	87	90-81	Good (90-71)		
Dist 6	LAFAYETTEC	LAFAYETTE CIR	10	LAFAYETTE WAY	END	R	A	2	191	31	5,921	**73**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	LAFAYETTEW	LAFAYETTE WAY	15	DELANCEY DR	BROADWAY DR	R	A	2	677	37	25,049	**81**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	LAKEALY	LAKE ALY	10	MARKET WAY	E LAKE ST	R	P	2	677	20	13,540	**70**	03/17/23	70	70-61	Fair (70-51)		
Dist 6	LANCASHIRE	LANCASHIRE CIR	10	LANCASHIRE DR	END	R	A	2	346	32	11,099	**72**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	LANCASHIR1	LANCASHIRE DR	10	BUCKINGHAM DR	DORSET WAY	R	A	2	821	32	26,280	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	LANCASHIR1	LANCASHIRE DR	20	DORSET WAY	LANCASHIRE CIR	R	A	2	248	32	7,936	**70**	08/15/23	71	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	LANCASHIR1	LANCASHIRE DR	30	LANCASHIRE CIR	CASCADE WAY	R	A	2	207	32	6,624	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	LANGST	LANG ST	15	IVERSON ST	CAPITOL ST	R	P	2	1,330	40	53,200	**58**	01/25/23	59	60-51	Fair (70-51)		
Dist 5	LARKINCIR	LARKIN CIR	10	LARKIN ST	END	R	A	2	410	32	13,120	**55**	08/15/23	56	60-51	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	LARKINST	LARKIN ST	015	W END	N DAVIS RD	R	A	2	344	37	12,728	**67**	03/01/23	68	70-61	Fair (70-51)		
Dist 5	LARKINST	LARKIN ST	025	N DAVIS RD	KEARNY WAY	C	A	2	1,268	41	51,988	**52**	03/01/23	54	60-51	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 5	LARKINST	LARKIN ST	035	KEARNY WAY	VICTOR ST	C	A	2	1,306	41	53,546	**58**	03/01/23	60	60-51	Fair (70-51)	05/15/19	SLURRY SEAL
Dist 5	LARKINST	LARKIN ST	045	VICTOR ST	RICO ST	C	A	2	756	41	30,996	**63**	03/01/23	65	70-61	Fair (70-51)	05/15/19	SLURRY SEAL
Dist 5	LARKSPURDR	LARKSPUR DR	10	HEATHER DR	LUPIN DR	R	A	2	769	32	24,620	**28**	03/01/23	30	30-21	Failed (30-0)	01/01/01	CAPE SEAL

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	LASCASITAS	LAS CASITAS DR	10	CONSTITUTION BLVD	RANCHERO DR	C	A	2	1,552	38	58,980	**43**	02/10/23	46	50-41	Poor (50-31)	03/06/19	DEEP PATCH
Dist 1	LASCASITAS	LAS CASITAS DR	20	RANCHERO DR	PINO WAY	C	A	2	447	37	16,539	**29**	02/10/23	32	30-21	Failed (30-0)	01/01/08	CAPE SEAL
Dist 1	LASCASITAS	LAS CASITAS DR	30	PINO WAY	RIDER AVE	C	A	2	743	37	27,491	**28**	02/10/23	31	30-21	Failed (30-0)	03/06/19	DEEP PATCH
Dist 3	LASCRUCESC	LAS CRUCES CT	10	LAS CRUCES WAY	END	R	A	2	417	38	15,846	**47**	01/23/23	49	50-41	Poor (50-31)	05/14/19	SLURRY SEAL
Dist 3	LASCRUCESW	LAS CRUCES WAY	15	SAN BLANCO DR	W END	R	A	2	396	32	12,697	**65**	01/23/23	66	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 6	LASSENAVE	LASSEN AVE	15	E ALVIN DR	RAINIER DR	R	A	2	1,246	38	47,348	**45**	02/09/23	46	50-41	Poor (50-31)		
Dist 5	LEESEDR	LEESE DR	10	SHERMAN DR	ALVARADO DR	R	A	2	1,076	32	34,455	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	LEGIONALY	LEGION ALY	10	ROCHEX AVE	W LAUREL DR	R	P	2	451	20	9,023	**66**	03/17/23	66	70-61	Fair (70-51)		
Dist 3	LEMOSAVE	LEMOS AVE	010	DAVIS RD	COLLEGE DR	R	A	2	2,532	37	93,684	**31**	01/25/23	33	40-31	Poor (50-31)	02/04/19	DEEP PATCH
Dist 6	LENNOXWAY	LENNOX WAY	15	TUDOR WAY	VICTORIA AVE	R	A	2	1,150	33	37,950	**68**	02/08/23	69	70-61	Fair (70-51)		
Dist 5	LENNYST	LENNY ST	15	HOOVER ST	LOUISE ST	R	A	2	1,354	32	43,348	**37**	03/02/23	39	40-31	Poor (50-31)		
Dist 6	LESLIEDR	LESLIE DR	15	NATIVIDAD RD	CALAVERAS DR	R	A	2	1,363	32	43,622	**23**	02/09/23	25	30-21	Failed (30-0)	08/05/19	DEEP PATCH
Dist 6	LEWISCIR	LEWIS CIR	10	LEWIS ST	END	R	A	2	235	32	7,520	**76**	02/03/23	77	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 6	LEWISST	LEWIS ST	15	HEMINGWAY DR	FAULKNER CIR	R	A	2	875	37	32,375	**78**	02/03/23	79	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 6	LEXINGTOND	LEXINGTON DR	15	PROVINCETOWN DR	INDEPENDENCE BLVD	R	A	2	1,997	37	73,889	**73**	02/03/23	74	80-71	Good (90-71)	07/29/19	DEEP PATCH
Dist 6	LEXINGTOND	LEXINGTON DR	90	INDEPENDENCE BLVD	LITTLE RIVER DR	R	A	2	210	33	6,930	**78**	02/03/23	79	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 3	LINCOLNAVE	LINCOLN AVE	010	W MARKET ST	CLAY ST	A	A	2	2,827	43	121,561	**66**	08/15/23	67	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	LINCOLNAVE	LINCOLN AVE	020	CLAY ST	AVENUE A	R	C	2	538	38	20,444	**38**	01/26/23	40	40-31	Poor (50-31)		
Dist 3	LINCOLNAVE	LINCOLN AVE	030	AVENUE A	AVENUE B	R	A	2	439	40	17,560	**37**	03/16/23	38	40-31	Poor (50-31)		
Dist 4	LINDENST	LINDEN ST	15	OREGON ST	EUCALYPTUS DR	R	A	2	996	42	41,839	**22**	03/03/23	24	30-21	Failed (30-0)		
Dist 4&6	LINWOODDR	LINWOOD DR	010	E ALVIN DR	RAINIER DR	C	A	2	1,253	44	55,132	**81**	02/17/23	82	90-81	Good (90-71)	04/27/21	SLURRY SEAL
Dist 4	LINWOODDR	LINWOOD DR	020SB	RAINIER DR	E LAUREL DR	C	A	2	1,982	26	51,532	**81**	02/17/23	82	90-81	Good (90-71)	05/03/21	SLURRY SEAL
Dist 4	LINWOODDR	LINWOOD DR	030NB	E LAUREL DR	RAINIER DR	C	A	2	1,982	26	51,532	**80**	02/17/23	81	80-71	Good (90-71)	05/03/21	SLURRY SEAL
Dist 6	LITTLERIVE	LITTLE RIVER DR	15	MANCHESTER DR	END	R	A	2	2,604	38	98,952	**78**	02/03/23	79	80-71	Good (90-71)		
Dist 3	LODGEALLY	LODGE ALLY	10	E MARKET ST	END	R	P	2	173	15	2,606	**60**	01/26/23	61	60-51	Fair (70-51)		
Dist 3	LODGELN	LODGE LN	10	E MARKET ST	E GABILAN ST	R	P	2	605	14	8,470	**79**	01/26/23	79	80-71	Good (90-71)		
Dist 3	LODGELN	LODGE LN	20	E GABILAN ST	E ALISAL ST	R	P	2	670	15	10,050	**79**	01/26/23	79	80-71	Good (90-71)		
Dist 3	LODGELN	LODGE LN	30	E ALISAL ST	E SAN LUIS ST	R	P	2	605	15	9,075	**60**	01/26/23	61	60-51	Fair (70-51)		
Dist 5	LOHMANST	LOHMAN ST	15	EISENHOWER ST	END	R	A	2	700	37	25,900	**64**	03/02/23	65	70-61	Fair (70-51)		
Dist 4	LOMADR	LOMA DR	15	E LAUREL DR	DORORO DR	R	A	2	1,054	32	33,736	**41**	02/09/23	43	50-41	Poor (50-31)		
Dist 3	LOMAVISTAD	LOMA VISTA DR	10	W ALISAL ST	SIERRA MADRE DR	R	A	2	735	32	23,530	**30**	01/25/23	32	30-21	Failed (30-0)	04/16/19	DEEP PATCH
Dist 4	LOMBARDCIR	LOMBARD CIR	10	LOMBARD ST	END	R	A	2	385	32	12,320	**49**	02/09/23	51	50-41	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 4	LOMBARDST	LOMBARD ST	15	VINCENT PL	HYDE ST	R	A	2	400	38	15,200	**37**	02/09/23	39	40-31	Poor (50-31)		
Dist 6	LONDONWAY	LONDON WAY	10	FAULKNER ST	LEWIS ST	R	A	2	1,026	32	32,839	**78**	02/03/23	79	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	LONDONDERR	LONDONDERRY WAY	15	COVENTRY ST	END	R	A	2	795	32	25,448	**71**	02/04/23	72	80-71	Good (90-71)		
Dist 1	LNGFLWCIR	LONGFELLOW CIR	10	LONGFELLOW DR	END	R	A	2	393	31	12,183	**68**	02/02/23	69	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 6	LONGFELLO1	LONGFELLOW DR	10	BRADBURY ST	HEMINGWAY DR	R	A	2	322	22	7,084	**75**	02/02/23	76	80-71	Good (90-71)	01/01/11	SLURRY SEAL
Dist 1	LNGFLWDR	LONGFELLOW DR	20	HEMINGWAY DR	WHITMAN CIR	R	A	2	969	37	35,853	**65**	02/02/23	66	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 3	LORIMERST	LORIMER ST	10	CENTRAL AVE	W ALISAL ST	R	C	2	1,146	32	36,672	**49**	01/25/23	50	50-41	Poor (50-31)		
Dist 3	LORIMERST	LORIMER ST	20	W ALISAL ST	HOMESTEAD AVE	R	C	2	1,021	32	32,672	**30**	01/25/23	32	30-21	Failed (30-0)		
Dist 6	LOSALTOSWA	LOS ALTOS WAY	15	ATHERTON WAY (N)	ATHERTON WAY (S)	R	A	2	1,444	32	46,208	**26**	02/04/23	28	30-21	Failed (30-0)		
Dist 6	LOSCOCHESA	LOS COCHES AVE	10	KLAMATH DR	HUMBOLDT DR	R	A	2	752	37	27,824	**47**	02/04/23	49	50-41	Poor (50-31)	02/20/19	DEEP PATCH
Dist 6	LOSCOCHESA	LOS COCHES AVE	20	HUMBOLDT DR	CAMBRIAN DR	R	A	2	2,098	37	77,626	**25**	02/04/23	27	30-21	Failed (30-0)	02/06/19	DEEP PATCH
Dist 6	LOSCOCHESC	LOS COCHES CIR	10	LOS COCHES AVE	END	R	A	2	326	32	10,447	**42**	02/08/23	44	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	LOSGATOSWA	LOS GATOS WAY	10	SARATOGA DR (W)	SARATOGA DR (E)	R	A	2	1,474	32	47,168	**33**	02/04/23	35	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	LOSLAURELE	LOS LAURELES AVE	10	SANTA LUCIA AVE	EL PASO PL	R	P	2	794	34	26,996	**61**	01/24/23	62	70-61	Fair (70-51)		
Dist 3	LOSOLIVOSD	LOS OLIVOS DR	55	SAN BLANCO DR	W BLANCO RD	R	A	2	1,693	37	62,641	**65**	01/23/23	66	70-61	Fair (70-51)	05/21/19	SLURRY SEAL
Dist 3	LOSPALOSDR	LOS PALOS DR	25	ABBOTT ST	E ROMIE LN	R	C	2	1,412	37	52,244	**50**	01/19/23	51	50-41	Poor (50-31)		
Dist 3	LOSPALOSDR	LOS PALOS DR	30	E ROMIE LN	SAN JOSE ST	C	A	2	607	37	22,459	**45**	01/19/23	48	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 3	LOSPALOSDR	LOS PALOS DR	45	SAN JOSE ST	SAN MIGUEL AVE	C	A	2	862	37	31,894	**39**	01/19/23	42	40-31	Poor (50-31)	09/12/19	DEEP PATCH
Dist 5	LOUISECT	LOUISE CT	10	LOUISE ST	END	R	A	2	160	32	5,120	**30**	03/02/23	32	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 5	LOUISEST	LOUISE ST	15	CLEVELAND AVE	LENNY ST	R	A	2	1,151	32	36,856	**34**	03/02/23	36	40-31	Poor (50-31)		
Dist 3	LOYOLADR	LOYOLA DR	25	UNIVERSITY AVE	ORINDA WAY	R	A	2	2,667	37	98,679	**59**	01/24/23	60	60-51	Fair (70-51)		
Dist 5	LUBERST	LUBER ST	10	HOOVER ST	CLEVELAND AVE	R	A	2	771	32	24,678	**34**	03/02/23	36	40-31	Poor (50-31)	01/01/07	CAPE SEAL

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 4	LUNSFORDDR	LUNSFORD DR	10	NATIVIDAD RD	END	R	A	2	706	32	22,612	**24**	02/17/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	LUPINDR	LUPIN DR	15	COLUMBINE DR	W BERNAL DR	R	A	2	1,899	32	60,770	**29**	03/01/23	31	30-21	Failed (30-0)	02/27/19	DEEP PATCH
Dist 3	LUTHERWAY	LUTHER WAY	10	PICO BLANCO	W BLANCO RD	R	A	2	420	23	9,660	**64**	01/23/23	65	70-61	Fair (70-51)	05/15/19	SLURRY SEAL
Dist 2	MACHADOWAY	MACHADO WAY	10	ALMA AVE	KIMMEL ST	R	A	2	467	32	14,944	**53**	03/13/23	54	60-51	Fair (70-51)		
Dist 2	MACHADOWAY	MACHADO WAY	20	KIMMEL ST	ACOSTA ST	R	A	2	910	32	29,120	**25**	03/13/23	27	30-21	Failed (30-0)		
Dist 4	MADEIRACIR	MADEIRA CIR	10	N MADEIRA AVE	END	R	A	2	480	32	15,360	**49**	03/03/23	50	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 4	MADONNADR	MADONNA DR	10	ROSARITA DR	SANTA TERESA WAY	R	A	2	722	32	23,109	**24**	02/17/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	MADRIDCIR	MADRID CIR	10	MADRID ST	END	R	A	2	495	32	15,840	**38**	02/10/23	40	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 5	MADRIDST	MADRID ST	15	CHEROKEE DR	N MAIN ST	R	A	2	2,077	51	105,927	**28**	02/10/23	30	30-21	Failed (30-0)	11/07/19	DEEP PATCH
Dist 1	MADRONEDR	MADRONE DR	010	NOGAL DR	MADRONE WAY	R	A	2	660	33	21,780	**80**	02/01/23	81	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	MADRONEDR	MADRONE DR	020	MADRONE WAY	BUCKEYE WAY	R	A	2	700	37	25,900	**80**	02/01/23	81	80-71	Good (90-71)		
Dist 1	MADRONEDR	MADRONE DR	030	BUCKEYE WAY	WEST END	R	A	2	425	33	14,025	**80**	02/01/23	81	80-71	Good (90-71)		
Dist 1	MADRONEWAY	MADRONE WAY	10	MADRONE DR	RIDER AVE	C	A	2	155	37	5,735	**79**	03/16/23	80	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	MAEAVE	MAE AVE	010	TOWT ST	C.O.P.	R	A	2	325	38	12,350	**64**	02/03/23	65	70-61	Fair (70-51)		
Dist 1	MAEAVE	MAE AVE	020	C.O.P.	DEL MONTE AVE	R	A	2	970	32	31,040	**40**	02/03/23	42	40-31	Poor (50-31)		
Dist 2	MAEAVE	MAE AVE	030	DEL MONTE AVE	GARNER AVE	R	A	2	1,549	36	55,764	**24**	02/03/23	26	30-21	Failed (30-0)	08/19/19	DEEP PATCH
Dist 2	MAGNOLIADR	MAGNOLIA DR	10	GARDEN WAY	MEADOW DR	R	A	2	1,050	32	33,600	**43**	01/19/23	45	50-41	Poor (50-31)	05/21/19	DEEP PATCH
Dist 3	MAINST	MAIN ST	25	E SAN LUIS ST	W GABILAN ST	C	A	2	1,351	37	49,993	**89**	03/16/23	91	90-81	Good (90-71)	06/25/21	RECONSTRUCT STRUCTURE (AC)
Dist 3	MAINST	MAIN ST	30	JOHN ST	E SAN LUIS ST	C	A	4	341	60	20,507	**35**	03/16/23	38	40-31	Poor (50-31)	07/05/19	DEEP PATCH
Dist 3	MAINST	MAIN ST	40	W GABILAN ST	CENTRAL AVE	C	A	2	430	36	15,485	**69**	03/16/23	71	70-61	Fair (70-51)	11/20/20	SLURRY SEAL
Dist 3	MALARINST	MALARIN ST	10	ABBOTT ST	BRUNKEN AVE	R	A	2	674	42	28,308	**19**	01/18/23	21	20-11	Failed (30-0)	01/01/02	CAPE SEAL
Dist 6	MANCHESTE1	MANCHESTER DR	10	CASTLETON ST	CONSTITUTION BLVD	R	A	2	813	42	34,146	**77**	02/03/23	78	80-71	Good (90-71)		
Dist 6	MANHATTAND	MANHATTAN DR	10	BROADWAY DR	MCKINNON ST	R	A	2	877	37	32,449	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	MANORDR	MANOR DR	15	GROVE ST	LOS PALOS DR	R	A	2	554	32	17,741	**55**	01/19/23	56	60-51	Fair (70-51)		
Dist 1	MANZANOCIR	MANZANO CIR	10	MIMBRERA WAY	END	R	A	2	482	31	14,954	**42**	02/01/23	44	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 1	MANZANOWAY	MANZANO WAY	20	NOGAL DR	MANZANO CIR	R	A	2	407	31	12,631	**62**	02/01/23	63	70-61	Fair (70-51)		
Dist 3	MAPLEST	MAPLE ST	010	S MAIN ST	PAJARO ST	C	C	2	774	42	32,508	**36**	01/20/23	39	40-31	Poor (50-31)		
Dist 3	MAPLEST	MAPLE ST	020	PAJARO ST	CALIFORNIA ST	C	C	2	691	42	29,022	**37**	01/20/23	40	40-31	Poor (50-31)		
Dist 3	MAPLEST	MAPLE ST	030	CALIFORNIA ST	ABBOTT ST	C	C	2	1,706	40	68,240	**34**	01/20/23	36	40-31	Poor (50-31)		
Dist 3	MAPLEWOODD	MAPLEWOOD DR	15	ALAMEDA AVE	GROVE ST	R	A	2	616	32	19,730	**33**	01/19/23	35	40-31	Poor (50-31)		
Dist 3	MAPLEWOODD	MAPLEWOOD DR	30	GROVE ST	SIERRA DR	R	A	2	391	32	12,523	**46**	01/19/23	48	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 2	MARGARETST	MARGARET ST	15	E ALISAL ST	PALOMA AVE	R	A	2	1,305	35	45,701	**24**	03/13/23	26	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 2	MARIGOLDWA	MARIGOLD WAY	15	GARDEN WAY	MEADOW DR	R	A	2	1,114	32	35,678	**24**	01/19/23	26	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 6	MARINAVE	MARIN AVE	15	RAINIER DR	LESLIE DR	R	A	2	2,035	32	65,133	**26**	02/09/23	28	30-21	Failed (30-0)	06/24/19	DEEP PATCH
Dist 3	MARIONAVE	MARION AVE	15	HOMESTEAD AVE	W ACACIA ST	R	A	2	1,792	32	57,371	**35**	01/25/23	37	40-31	Poor (50-31)	05/16/19	DEEP PATCH
Dist 6	MARIPOSACT	MARIPOSA CT	10	MARIPOSA ST	END	R	A	2	363	32	11,621	**23**	02/09/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	MARIPOSAST	MARIPOSA ST	10	TRINITY WAY	MARIN AVE	R	A	2	873	32	27,945	**22**	02/09/23	24	30-21	Failed (30-0)		
Dist 4	MARKETWAY	MARKET WAY	15	SHERWOOD DR	BRIDGE ST	R	A	2	1,117	37	41,350	**49**	03/17/23	50	50-41	Poor (50-31)	02/15/19	DEEP PATCH
Dist 2	MARSALACIR	MARSALA CIR	10	PALERMO DR	END	R	A	2	419	32	13,408	**87**	03/15/23	88	90-81	Good (90-71)		
Dist 2	MARSALAWAY	MARSALA WAY	10	PALERMO DR	BELLAGIO WAY	R	A	2	682	34	23,188	**85**	03/15/23	86	90-81	Good (90-71)		
Dist 6	MARSHFIELD	MARSHFIELD CIR	10	HANCOCK ST	END	R	A	2	332	32	10,641	**69**	02/03/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	MARSHFIEL1	MARSHFIELD CT	10	HANCOCK ST W. SIDE	HANCOCK ST E. SIDE	R	A	2	1,307	33	43,131	**70**	02/03/23	71	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 4	MARTELLAST	MARTELLA ST	10	PRESTONE ST	W ROSSI ST	R	A	2	684	35	23,940	**35**	03/16/23	37	40-31	Poor (50-31)		
Dist 3	MARTELLAST	MARTELLA ST	20	W ROSSI ST	W LAKE ST	R	A	2	400	69	27,600	**47**	03/16/23	48	50-41	Poor (50-31)	03/06/19	DEEP PATCH
Dist 3	MARTELLAST	MARTELLA ST	30	W LAKE ST	SOUTH END	R	A	2	175	32	5,600	**9**	03/16/23	11	10-0	Failed (30-0)	03/06/19	DEEP PATCH
Dist 4	MARYALDR	MARYAL DR	10	CHAPARRAL ST	END	R	A	2	154	30	4,641	**79**	02/17/23	80	80-71	Good (90-71)	01/01/01	SLURRY SEAL
Dist 4	MARYALDR	MARYAL DR	20	CHAPARRAL ST	E LAUREL DR	R	A	2	1,754	30	52,620	**48**	02/17/23	49	50-41	Poor (50-31)	04/28/21	SLURRY SEAL
Dist 4	MARYALDR	MARYAL DR	30	E LAUREL DR	E BERNAL DR	C	A	2	2,714	37	100,418	**60**	02/17/23	62	60-51	Fair (70-51)	05/04/21	SLURRY SEAL
Dist 5	MASONWAY	MASON WAY	10	HOWE DR	LARKIN ST	R	A	2	249	32	7,973	**61**	08/15/23	62	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	MASSAST	MASSA ST	15	N MAIN ST	END	R	A	2	479	32	15,348	**41**	03/03/23	42	50-41	Poor (50-31)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	MSSCHUCIR	MASSACHUSETTS CIR	10	MASSACHUSETTS DR	END	R	A	2	235	33	7,755	**64**	02/01/23	65	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 1	MSSCHUDR	MASSACHUSETTS DR	010	RHODE ISLAND ST	VERMONT CIR	R	A	2	925	37	34,225	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 1	MSSCHUDR	MASSACHUSETTS DR	020	VERMONT CIR	END	R	A	2	480	33	15,840	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 1	MSSCHUWAY	MASSACHUSETTS WAY	10	CONSTITUTION BLVD	MASSACHUSETTS DR	R	A	2	145	37	5,365	**77**	02/01/23	78	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 4	MASSOLOCIR	MASSOLO CIR	10	MASSOLO CT	END	R	A	2	200	32	6,400	**88**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	MASSOLOCT	MASSOLO CT	15	VINCENT PL (W)	VINCENT PL (E)	R	A	2	1,235	32	39,522	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	MAYFAIRDR	MAYFAIR DR	15	S SANBORN RD	MAYFAIR DR	R	A	2	2,512	30	75,360	**78**	01/17/23	79	80-71	Good (90-71)		
Dist 1	MAZATLANST	MAZATLAN ST	15	YUCATAN WAY	END	R	A	2	1,085	38	41,230	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 1	MAZATLANWA	MAZATLAN WAY	10	MAZATLAN ST	RIDER AVE	R	A	2	158	38	6,004	**76**	02/01/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 4	MCALLISTER	MCALLISTER CIR	10	MCALLISTER ST	END	R	A	2	185	32	5,920	**57**	03/02/23	58	60-51	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 4	MCALLISTE1	MCALLISTER ST	15	BRIGHTON ST	VICTOR ST	R	A	2	1,649	32	52,780	**59**	03/02/23	60	60-51	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 2	MCGOWANCIR	MCGOWAN CIR	10	MCGOWAN DR	END	R	A	2	272	39	10,608	**28**	01/17/23	30	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 2	MCGOWANDR	MCGOWAN DR	15	S SANBORN RD	JOHN ST	R	A	2	1,282	38	48,716	**39**	01/17/23	41	40-31	Poor (50-31)	02/15/19	DEEP PATCH
Dist 6	MCKINNONST	MCKINNON ST	10	E ALVIN DR	WESTMINSTER DR	C	A	4	988	54	53,352	**66**	10/05/23	66	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	MCKINNONST	MCKINNON ST	20	WESTMINSTER DR	HARDEN PKWY	C	A	2	866	42	36,372	**75**	10/05/23	75	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 6	MCKINNONST	MCKINNON ST	30	HARDEN PKWY	CHARDONNAY DR	C	A	2	1,029	42	43,218	**82**	10/05/23	82	90-81	Good (90-71)	10/05/23	CHIP SEAL
Dist 6	MCKINNONST	MCKINNON ST	40	CHARDONNAY DR	E BORONDA RD	C	A	2	770	42	32,340	**78**	10/05/23	78	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 6	MCKINNONST	MCKINNON ST	50	E BORONDA RD	N END	R	A	2	1,138	37	42,106	**79**	10/05/23	79	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 2	MEADOWDR	MEADOW DR	15	JOHN ST (N)	JOHN ST (S)	R	A	2	2,200	32	70,400	**50**	01/19/23	52	50-41	Poor (50-31)	02/05/19	DEEP PATCH
Dist 3	MELODYLN	MELODY LN	10	W GABILAN ST	W ALISAL ST	R	P	2	669	15	10,035	**65**	01/26/23	66	70-61	Fair (70-51)		
Dist 3	MELODYLN	MELODY LN	20	W ALISAL ST	W SAN LUIS ST	R	P	2	630	15	9,450	**48**	01/26/23	49	50-41	Poor (50-31)		
Dist 3	MELODYLN	MELODY LN	30	W GABILAN ST	END	NCR	P	2	172	15	2,593	**92**	01/26/23	92	100-91	Excellent (100-91)		
Dist 3	MELROSEDR	MELROSE DR	10	BELMONT DR	PARK ST	R	A	2	736	32	23,578	**42**	03/17/23	43	50-41	Poor (50-31)	03/25/19	SHALLOW PATCH
Dist 1	MELVILLEST	MELVILLE ST	10	LONGFELLOW DR	WHITMAN ST	R	A	2	1,070	31	33,170	**69**	03/16/23	70	70-61	Fair (70-51)	01/01/00	REJUVENATION OIL
Dist 6	MENDOCINOD	MENDOCINO DR	15	PLACER WAY	YOLO CIR	R	A	2	884	38	33,592	**58**	02/17/23	59	60-51	Fair (70-51)		
Dist 6	MENDOCINOD	MENDOCINO DR	45	YOLO CIR	EL DORADO DR	R	A	2	887	38	33,706	**22**	02/17/23	24	30-21	Failed (30-0)	05/21/19	DEEP PATCH
Dist 6	MENLOWAY	MENLO WAY	10	ATHERTON WAY	LOS ALTOS WAY	R	A	2	644	32	20,625	**21**	02/04/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	MERCEDST	MERCED ST	15	E MARKET ST	END	R	A	2	883	32	28,286	**22**	01/18/23	24	30-21	Failed (30-0)	06/24/19	DEEP PATCH
Dist 2	MERCERWAY	MERCER WAY	10	AIRPORT BLVD	MORTENSEN AVE	R	A	2	692	35	24,220	**30**	01/17/23	32	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	MEREDITHCI	MEREDITH CIR	10	BEACON HILL DR	END	R	A	2	235	32	7,520	**74**	02/02/23	76	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	MERLOTCIR	MERLOT CIR	10	MERLOT WAY	END	R	A	2	231	31	7,161	**66**	03/01/23	67	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	MERLOTWAY	MERLOT WAY	15	CHARDONNAY DR	WINDSOR ST	R	A	2	1,214	33	40,062	**66**	03/01/23	67	70-61	Fair (70-51)		
Dist 1	MESCALCT	MESCAL CT	10	SAGUARO DR (N)	SAGUARO DR (S)	R	A	2	1,380	32	44,160	**79**	02/01/23	80	80-71	Good (90-71)	04/16/19	SLURRY SEAL
Dist 1	MESQUITEDR	MESQUITE DR	15	E BORONDA RD	BUCKHORN DR	C	A	2	1,085	37	40,152	**74**	02/01/23	76	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 4	MEYERSCT	MEYERS CT	10	N HEBBRON AVE (S)	N HEBBRON AVE (N)	R	P	2	1,015	30	30,452	**65**	03/13/23	66	70-61	Fair (70-51)		
Dist 2	MIAMIST	MIAMI ST	15	CROSS AVE	AFTON ROAD	R	A	2	1,121	35	39,235	**50**	03/13/23	51	50-41	Poor (50-31)		
Dist 2	MIDWAYAVE	MIDWAY AVE	10	FAIRHAVEN ST	E LAUREL DR	R	A	2	574	36	20,664	**25**	03/13/23	27	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	MIDWAYAVE	MIDWAY AVE	20	E LAUREL DR	E MARKET ST	R	O	2	843	35	29,506	**48**	03/13/23	49	50-41	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 4	MILLWAY	MILL WAY	10	SANSOME ST	GREENBRIAR WAY	R	A	2	321	32	10,273	**77**	08/15/23	77	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	MILLBRAEST	MILLBRAE ST	15	NATIVIDAD RD	ATHERTON WAY	R	A	2	453	41	18,573	**27**	02/04/23	29	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 6	MILTONWAY	MILTON WAY	10	CABOT WAY	BOSTON ST	R	A	2	482	32	15,435	**76**	02/02/23	77	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 1	MIMBRERACI	MIMBRERA CIR	10	MIMBRERA WAY	END	R	A	2	330	31	10,230	**43**	02/01/23	45	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 1	MIMBRERAWA	MIMBRERA WAY	010	RIDER AVE	NOGAL DR	R	A	2	859	38	32,642	**73**	02/01/23	74	80-71	Good (90-71)		
Dist 2	MODENAST	MODENA ST	15	CAMPANIA WAY	END	R	A	2	1,005	34	34,170	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	MODENAWAY	MODENA WAY	10	MODENA ST	PALERMO DR	R	A	2	272	33	8,976	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	MODOCAVE	MODOC AVE	10	RAINIER DR	E ALVIN DR	R	A	2	1,244	35	43,540	**59**	02/09/23	60	60-51	Fair (70-51)		
Dist 2	MOFFETTST	MOFFETT ST	010	AIRPORT BLVD	LA GUARDIA ST	R	A	2	3,225	41	132,225	**61**	01/17/23	63	70-61	Fair (70-51)		
Dist 2	MOFFETTST	MOFFETT ST	020	LA GUARDIA ST	VANDENBERG ST	R	A	2	1,261	41	51,701	**67**	01/17/23	68	70-61	Fair (70-51)		
Dist 2	MOHARST	MOHAR ST	15	N SANBORN RD	BEECH ST	R	A	2	1,228	32	39,303	**31**	03/13/23	33	40-31	Poor (50-31)		
Dist 5	MOHAWKAVE	MOHAWK AVE	15	ADAMS ST	NAVAJO DR	R	A	2	785	38	29,830	**31**	02/16/23	33	40-31	Poor (50-31)		
Dist 5	MONROEST	MONROE ST	15	TULANE ST	POLK ST	R	A	2	1,786	34	60,724	**30**	02/17/23	32	30-21	Failed (30-0)	05/21/19	DEEP PATCH
Dist 2	MONTANAST	MONTANA ST	15	N SANBORN RD	BEECH ST	R	A	2	1,227	32	39,277	**33**	03/13/23	35	40-31	Poor (50-31)	02/07/19	DEEP PATCH

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	MONTEBELLA	MONTE BELLA BLVD	10	SCONBERG PKWY	SARDINA DR	C	A	2	1,256	46	57,776	**78**	03/15/23	79	80-71	Good (90-71)	06/29/17	SLURRY SEAL
Dist 2	MONTEBELLA	MONTE BELLA BLVD	20	SARDINA DR	TUSCANY BLVD	C	A	2	1,819	46	83,674	**78**	03/15/23	79	80-71	Good (90-71)	06/29/17	SLURRY SEAL
Dist 2	MONTEBELLA	MONTE BELLA BLVD	30	TUSCANY BLVD	WILLIAMS RD	C	A	2	894	41	36,654	**79**	03/15/23	80	80-71	Good (90-71)	06/29/17	SLURRY SEAL
Dist 3	MONTECITOC	MONTECITO CIR	10	MONTECITO WAY	END	R	A	2	367	32	11,769	**54**	01/24/23	55	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 3	MONTECITOW	MONTECITO WAY	15	W ALISAL ST	KENTFIELD DR	R	A	2	953	37	35,261	**44**	01/24/23	46	50-41	Poor (50-31)		
Dist 3	MONTEREYST	MONTEREY ST	010	JOHN ST	E SAN LUIS ST	A	A	2	526	48	25,248	**55**	01/25/23	57	60-51	Fair (70-51)	07/11/19	SHALLOW PATCH
Dist 3	MONTEREYST	MONTEREY ST	020	E SAN LUIS ST	E ALISAL ST	A	A	2	677	48	32,496	**44**	01/25/23	46	50-41	Poor (50-31)	07/03/19	DEEP PATCH
Dist 3	MONTEREYST	MONTEREY ST	030	E ALISAL ST	E MARKET ST	A	A	2	1,361	48	65,328	**46**	01/25/23	48	50-41	Poor (50-31)	10/18/19	DEEP PATCH
Dist 5	MONTGOMERY	MONTGOMERY ST	10	BUSH ST	HYDE ST	R	A	2	745	32	23,840	**40**	02/09/23	42	40-31	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 1	MORENOCIR	MORENO CIR	10	PASEO GRANDE	END	R	A	2	187	33	6,171	**77**	02/03/23	78	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	MORENODR	MORENO DR	010	PASEO GRANDE	CAMARILLO CT	C	A	2	975	38	37,050	**76**	02/03/23	78	80-71	Good (90-71)		
Dist 1	MORENOWAY	MORENO WAY	10	TOWT ST	MORENO DR	C	A	2	145	38	5,510	**76**	03/17/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 2	MORTENSENA	MORTENSEN AVE	020	SKYWAY BLVD	MERCER WAY	R	A	2	1,028	55	56,540	**13**	01/17/23	16	20-11	Failed (30-0)		
Dist 3	MURPHYST	MURPHY ST	10	E ALISAL ST	END	R	A	2	586	32	18,752	**21**	01/18/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	MUSTANGCT	MUSTANG CT	15	BADGER WAY (W)	BADGER WAY (E)	R	A	2	1,258	33	41,514	**79**	02/01/23	80	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 4	MYRTLECT	MYRTLE CT	15	MYRTLE ST (N)	MYRTLE ST (S)	R	A	2	600	36	21,600	**50**	03/03/23	51	50-41	Poor (50-31)		
Dist 4	MYRTLEST	MYRTLE ST	10	TOWT ST	CIRCLE DR	R	A	2	899	30	26,970	**42**	03/03/23	43	50-41	Poor (50-31)	01/24/19	DEEP PATCH
Dist 5	N1STST	N 1ST ST	015	CHEROKEE DR	W ALVIN DR	R	A	2	1,364	41	55,924	**28**	02/17/23	30	30-21	Failed (30-0)	08/12/19	DEEP PATCH
Dist 5	N1STST	N 1ST ST	045	W ALVIN DR	W CURTIS ST	R	A	2	2,226	38	84,588	**19**	02/17/23	21	20-11	Failed (30-0)	11/07/19	DEEP PATCH
Dist 5	N2NDST	N 2ND ST	10	BOEING AVE	W CURTIS ST	R	A	2	635	36	22,860	**21**	02/16/23	23	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 5	N3RDST	N 3RD ST	10	BOEING AVE	W CURTIS ST	R	A	2	653	36	23,508	**31**	02/16/23	33	40-31	Poor (50-31)	03/25/19	SHALLOW PATCH
Dist 5	N3RDST	N 3RD ST	20	W CURTIS ST	ROCHEX AVE	R	A	2	412	32	13,184	**24**	02/16/23	26	30-21	Failed (30-0)	03/25/19	SHALLOW PATCH
Dist 5	N4THST	N 4TH ST	10	CRESCENT WAY	W CURTIS ST	R	A	2	675	34	22,950	**28**	02/16/23	30	30-21	Failed (30-0)		
Dist 5	N4THST	N 4TH ST	20	ROCHEX AVE	W CURTIS ST	R	A	2	406	22	8,932	**25**	02/16/23	27	30-21	Failed (30-0)		
Dist 3	NACACIACIR	N ACACIA CIR	10	W ACACIA ST	END	R	A	2	156	32	4,993	**18**	03/16/23	20	20-11	Failed (30-0)	08/28/20	SKIN PATCH
Dist 4	NDAVISRD	N DAVIS RD	150NB	W ROSSI ST	SLOAT DR	A	O	2	751	32	24,032	**65**	10/05/23	65	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 4	NDAVISRD	N DAVIS RD	150SB	SLOAT DR	W ROSSI ST	A	O	2	751	32	24,032	**83**	10/05/23	83	90-81	Good (90-71)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	160NB	SLOAT DR	W LAUREL DR	A	A	2	3,026	32	96,832	**67**	10/05/23	67	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	160SB	W LAUREL DR	SLOAT DR	A	A	2	3,026	32	96,832	**74**	10/05/23	74	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	170NB	W LAUREL DR	WESTRIDGE PKWY	A	A	2	2,232	32	71,424	**72**	10/05/23	72	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	170SB	WESTRIDGE PKWY	W LAUREL DR	A	A	2	2,239	32	71,648	**70**	10/05/23	70	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	180NB	WESTRIDGE PKWY	AUTO CENTER CIR	A	A	2	4,506	32	144,192	**68**	10/05/23	69	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	180SB	AUTO CENTER CIR	WESTRIDGE PKWY	A	A	2	4,488	32	143,616	**70**	10/05/23	70	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	190NB	AUTO CENTER CIR	BORONDA CROSSING PL (N)	A	A	2	2,374	32	75,968	**69**	10/05/23	69	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	190SB	BORONDA CROSSING PL (N)	AUTO CENTER CIR	A	A	2	2,405	32	76,960	**70**	10/05/23	70	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	200NB	BORONDA CROSSING PL	BORONDA RD	A	A	2	1,125	32	36,000	**73**	10/05/23	73	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	200SB	S FREEWAY OFF RAMP	BORONDA CROSSING PL	A	A	2	1,125	32	36,000	**73**	10/05/23	73	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 4	NFILICEST	N FILICE ST	10	E ALISAL ST	N END (BARRICADE)	R	A	2	105	44	4,620	**13**	03/17/23	15	20-11	Failed (30-0)		
Dist 4	NFILICEST	N FILICE ST	15	ELTON PL	S END (BARRICADE)	R	A	2	1,475	39	57,525	**50**	03/13/23	51	50-41	Poor (50-31)		
Dist 4	NHEBBRONAV	N HEBBRON AVE	15	E ALISAL ST	E MARKET ST	C	A	2	1,149	40	45,960	**43**	03/13/23	45	50-41	Poor (50-31)		
Dist 4	NHEBBRONAV	N HEBBRON AVE	45	E MARKET ST	ELTON PL	R	A	2	566	38	21,539	**45**	03/13/23	46	50-41	Poor (50-31)	03/06/19	DEEP PATCH
Dist 4	NMADEIRAAV	N MADEIRA AVE	010	W END (TREE BARRICADE)	ST EDWARDS AVE	R	A	2	2,243	37	82,991	**53**	03/03/23	54	60-51	Fair (70-51)		
Dist 4	NMADEIRAAV	N MADEIRA AVE	020	ST EDWARDS AVE	HILL CIR	R	A	2	1,637	37	60,569	**45**	03/03/23	46	50-41	Poor (50-31)		
Dist 4	NMADEIRAAV	N MADEIRA AVE	025	HILL CIR	N SANBORN RD	R	A	2	581	32	18,619	**21**	03/03/23	23	30-21	Failed (30-0)	05/21/19	DEEP PATCH
Dist 4	NMADEIRAAV	N MADEIRA AVE	125	E ALISAL ST	E MARKET ST	R	A	2	1,157	40	46,280	**49**	03/13/23	50	50-41	Poor (50-31)		
Dist 4	NMADEIRAAV	N MADEIRA AVE	130	E MARKET ST	TERRACE ST	R	A	2	650	42	27,300	**29**	03/13/23	31	30-21	Failed (30-0)		
Dist 4	NMADEIRAAV	N MADEIRA AVE	140	TERRACE ST	NE END (TREE BARRICADE)	R	A	2	1,471	41	60,311	**49**	03/13/23	50	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 4	NMAINDR	N MAIN DR	10	CHAPARRAL ST	END	R	O	2	514	32	16,477	**57**	02/17/23	58	60-51	Fair (70-51)	01/01/10	2" OVERLAY

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 5	NMAINST	N MAIN ST	010	RUSSELL RD	COP 900' S/O RUSSELL RD	A	A	4	900	85	76,500	**62**	02/09/23	64	70-61	Fair (70-51)		
Dist 5	NMAINST	N MAIN ST	020	COP 900' S/O RUSSEL RD	BORONDA RD	A	P	4	3,798	78	296,244	**79**	03/16/23	79	80-71	Good (90-71)	04/16/19	DEEP PATCH
Dist 5	NMAINST	N MAIN ST	025SB	E BORONDA RD	SAN JUAN GRADE RD	A	A	1	1,749	32	55,968	**43**	02/09/23	45	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	035SB	SAN JUAN GRADE RD	HARDEN PKWY	A	A	1	1,280	32	40,960	**43**	02/09/23	45	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	045SB	HARDEN PKWY	CHEROKEE DR	A	A	1	611	47	28,717	**49**	02/09/23	51	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	055SB	CHEROKEE DR	W ALVIN DR	A	A	1	1,392	47	65,424	**53**	02/09/23	55	60-51	Fair (70-51)		
Dist 4&5	NMAINST	N MAIN ST	085SB	W ALVIN DR	NAVAJO DR	A	O	3	802	38	30,476	**47**	02/09/23	49	50-41	Poor (50-31)	01/01/10	2" OVERLAY
Dist 4&5	NMAINST	N MAIN ST	095SB	NAVAJO DR	W CURTIS ST	A	O	3	1,433	32	45,856	**52**	02/09/23	54	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 4&5	NMAINST	N MAIN ST	115SB	W CURTIS ST	W LAUREL DR	A	O	3	918	38	34,884	**53**	02/09/23	55	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 4&5	NMAINST	N MAIN ST	125SB	W LAUREL DR	IRIS DR	A	O	3	2,231	38	84,778	**54**	02/09/23	56	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 4&5	NMAINST	N MAIN ST	135SB	IRIS DR	W BERNAL DR	A	O	3	1,180	38	44,840	**57**	02/09/23	59	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 5	NMAINST	N MAIN ST	NB025	SAN JUAN GRADE RD	E BORONDA RD	A	A	1	1,749	47	82,203	**47**	02/09/23	49	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	NB035	HARDEN PKWY	SAN JUAN GRADE RD	A	A	1	1,280	47	60,160	**49**	02/09/23	51	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	NB045	CHEROKEE DR	HARDEN PKWY	A	A	1	611	47	28,717	**47**	02/09/23	49	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	NB055	E ALVIN DR	CHEROKEE DR	A	A	1	1,392	47	65,424	**57**	02/09/23	59	60-51	Fair (70-51)		
Dist 4&5	NMAINST	N MAIN ST	NB085	NAVAJO DR	E ALVIN DR	A	A	3	802	38	30,476	**43**	02/09/23	45	50-41	Poor (50-31)		
Dist 4&5	NMAINST	N MAIN ST	NB095	E CURTIS ST	NAVAJO DR	A	A	3	1,433	38	54,454	**50**	02/09/23	52	50-41	Poor (50-31)		
Dist 4&5	NMAINST	N MAIN ST	NB115	E LAUREL DR	E CURTIS ST	A	A	3	918	38	34,884	**53**	02/09/23	55	60-51	Fair (70-51)		
Dist 4&5	NMAINST	N MAIN ST	NB125	IRIS DR	E LAUREL DR	A	A	3	2,231	38	84,778	**57**	02/09/23	59	60-51	Fair (70-51)		
Dist 4&5	NMAINST	N MAIN ST	NB135	E BERNAL DR	IRIS DR	A	A	3	1,180	38	44,840	**54**	02/09/23	56	60-51	Fair (70-51)		
Dist 4&5	NMAINST	N MAIN ST	NB200	SANTA CLARA AVE	W BERNAL DR	A	A	3	729	36	26,244	**58**	02/10/23	60	60-51	Fair (70-51)	03/04/19	DEEP PATCH
Dist 5	NMAINST	N MAIN ST	PCC025	E BORONDA RD	SAN JUAN GRADE RD	A	P	4	1,749	50	87,450	**61**	10/30/20	64	70-61	Fair (70-51)		
Dist 5&6	NMAINST	N MAIN ST	PCC035	SAN JUAN GRADE RD	HARDEN PKWY	A	P	4	1,280	50	64,000	**61**	10/30/20	64	70-61	Fair (70-51)		
Dist 5&6	NMAINST	N MAIN ST	PCC045	HARDEN PKWY	CHEROKEE DR	A	P	4	611	50	30,550	**61**	10/30/20	64	70-61	Fair (70-51)		
Dist 5&6	NMAINST	N MAIN ST	PCC055	CHEROKEE DR	E ALVIN DR	A	P	4	1,392	50	69,600	**61**	10/30/20	64	70-61	Fair (70-51)		
Dist 4	NPEARLST	N PEARL ST	15	E MARKET ST	E ALISAL ST	R	A	2	1,146	36	41,256	**43**	03/13/23	44	50-41	Poor (50-31)	03/04/19	DEEP PATCH
Dist 1	NSANBORNRD	N SANBORN RD	10	E BORONDA RD	FREEDOM PKWY	A	A	2	1,937	64	123,980	**76**	01/18/23	78	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 1	NSANBORNRD	N SANBORN RD	20	FREEDOM PKWY	ANTIGUA AVE	A	A	2	1,073	77	82,663	**77**	01/18/23	79	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 1	NSANBORNRD	N SANBORN RD	30	ANTIGUA AVE	DEL MONTE AVE	A	A	2	2,098	63	132,201	**78**	01/18/23	79	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 1&2	NSANBORNRD	N SANBORN RD	40	DEL MONTE AVE	GARNER AVE	A	A	2	1,545	64	98,880	**72**	01/18/23	74	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 1&2	NSANBORNRD	N SANBORN RD	50	GARNER AVE	E LAUREL DR	A	A	2	2,074	64	132,784	**81**	01/18/23	83	90-81	Good (90-71)	06/03/22	FOG SEAL
Dist 4	NSANBORNRD	N SANBORN RD	60	E LAUREL DR	OREGON ST	A	A	2	453	65	29,487	**31**	01/18/23	34	40-31	Poor (50-31)	03/18/19	SHALLOW PATCH
Dist 4	NSANBORNRD	N SANBORN RD	70	OREGON ST	E MARKET ST	A	A	2	2,580	65	167,759	**44**	01/18/23	46	50-41	Poor (50-31)	11/12/19	DEEP PATCH
Dist 4	NSANBORNRD	N SANBORN RD	80	E MARKET ST	E ALISAL ST	A	A	4	1,308	65	85,020	**44**	01/18/23	46	50-41	Poor (50-31)	03/18/19	SHALLOW PATCH
Dist 4	NWOODST	N WOOD ST	10	E. ALISAL ST	ROOSEVELT ST	R	A	2	577	32	18,471	**24**	01/26/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
	NMAIN183	N. MAIN ST (SR-183)	010NB	W. MARKET ST	END DIVIDED RD (450' N/O W MARK	NCR	P	2	450	38	17,100	**66**	03/17/23	67	70-61	Fair (70-51)		
	NMAIN183	N. MAIN ST (SR-183)	020NB&SB	END DIVIDED RD	END PCC N/O CASENTINI	NCR	P	4	2,450	84	205,800	**82**	01/20/21	83	90-81	Good (90-71)		
	NMAIN183	N. MAIN ST (SR-183)	030NB	END PCC N/O CASENTINI ST	BERNAL DR	NCR	A	2	1,750	36	63,000	**63**	03/17/23	64	70-61	Fair (70-51)		
	NMAIN183	N. MAIN ST (SR-183)	040SB	BERNAL DR	START PCC BRIDGE	NCR	A	2	600	37	22,200	**64**	03/17/23	65	70-61	Fair (70-51)		
	NMAIN183	N. MAIN ST (SR-183)	050SB	START PCC BRIDGE	END PCC BRIDGE	NCR	P	2	525	25	13,125	**78**	03/17/23	78	80-71	Good (90-71)		
	NMAIN183	N. MAIN ST (SR-183)	060SB	END PCC BRIDGE	START PCC N/O CASENTINI	NCR	A	2	600	42	25,200	**53**	03/17/23	54	60-51	Fair (70-51)		
	NMAIN183	N. MAIN ST (SR-183)	070SB	START DIVIDED RD	END PCC	NCR	P	2	245	36	8,820	**54**	03/17/23	55	60-51	Fair (70-51)		
	NMAIN183	N. MAIN ST (SR-183)	080SB	END PCC	W MARKET ST	NCR	A	3	310	37	11,470	**72**	03/17/23	73	80-71	Good (90-71)		
Dist 3	NACIONALCT	NACIONAL CT	10	CLARK ST (N)	CLARK ST (S)	R	A	2	1,884	38	71,592	**76**	03/16/23	77	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 3	NACIONALST	NACIONAL ST	10	CLARK ST	PARK ST	R	A	2	1,800	38	68,400	**31**	03/16/23	33	40-31	Poor (50-31)	11/05/19	DEEP PATCH
Dist 3	NACIONALST	NACIONAL ST	20	PARK ST	CENTRAL AVE	R	P	2	640	40	25,600	**44**	03/16/23	45	50-41	Poor (50-31)	11/05/19	DEEP PATCH
Dist 3	NACIONALST	NACIONAL ST	30	CENTRAL AVE	S END	R	A	2	236	37	8,732	**31**	03/16/23	33	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 6	NANTUCKETB	NANTUCKET BLVD	10	INDEPENDENCE BLVD	HEMINGWAY DR	C	A	2	2,292	38	87,096	**55**	02/02/23	57	60-51	Fair (70-51)		
Dist 1&6	NANTUCKETB	NANTUCKET BLVD	20	HEMINGWAY DR	DECLARATION ST	C	A	2	1,851	43	79,593	**64**	02/02/23	66	70-61	Fair (70-51)		
Dist 1&6	NANTUCKETB	NANTUCKET BLVD	30	DECLARATION ST	CONSTITUTION BLVD	C	A	2	1,122	44	49,368	**66**	02/02/23	68	70-61	Fair (70-51)		
Dist 6	NAPAWAY	NAPA WAY	15	EL DORADO DR	IMPERIAL WAY	R	A	2	551	32	17,653	**31**	02/09/23	33	40-31	Poor (50-31)	03/06/19	DEEP PATCH
Dist 2	NAPOLICIR	NAPOLI CIR	10	PALERMO DR	END	R	A	2	298	32	9,536	**87**	03/15/23	88	90-81	Good (90-71)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 4	NATIVIDADR	NATIVIDAD RD	010	SHERWOOD DR	E LAUREL DR	A	P	2	2,141	64	137,024	**75**	01/24/23	76	80-71	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 6	NATIVIDADR	NATIVIDAD RD	080	E BORONDA RD	ROGGE RD	R	A	2	5,275	38	200,450	**47**	01/24/23	49	50-41	Poor (50-31)	08/23/19	DEEP PATCH
Dist 4&6	NATIVIDADR	NATIVIDAD RD	020NB	S LAUREL DR	RAINIER DR	A	P	3	2,105	36	75,780	**77**	01/24/23	78	80-71	Good (90-71)		
Dist 6	NATIVIDADR	NATIVIDAD RD	030NB	RAINIER DR	E ALVIN DR	A	P	3	1,109	36	39,924	**85**	01/24/23	86	90-81	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 6	NATIVIDADR	NATIVIDAD RD	040NB	E ALVIN DR	LOS COCHES AVE	A	A	3	1,803	36	64,908	**75**	01/24/23	76	80-71	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 6	NATIVIDADR	NATIVIDAD RD	050NB	LOS COCHES AVE	EMERALD WAY	A	A	3	1,753	36	63,108	**76**	01/24/23	78	80-71	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 6	NATIVIDADR	NATIVIDAD RD	060NB	EMERALD WAY	ARCADIA WAY	A	A	3	849	36	30,564	**78**	01/24/23	79	80-71	Good (90-71)	05/24/19	SLURRY SEAL
Dist 6	NATIVIDADR	NATIVIDAD RD	070NB	ARCADIA WAY	E BORONDA RD	A	A	3	776	36	27,936	**72**	01/24/23	73	80-71	Good (90-71)	05/24/19	SLURRY SEAL
Dist 6	NATIVIDADR	NATIVIDAD RD	SB090	E BORONDA RD	ARCADIA WAY	A	O	3	775	60	46,500	**77**	01/24/23	78	80-71	Good (90-71)	05/24/19	SLURRY SEAL
Dist 6	NATIVIDADR	NATIVIDAD RD	SB100	ARCADIA WAY	EMERALD WAY	A	O	3	849	36	30,564	**76**	01/24/23	78	80-71	Good (90-71)	05/24/19	SLURRY SEAL
Dist 6	NATIVIDADR	NATIVIDAD RD	SB110	EMERALD WAY	LOS COCHES AVE	A	O	3	1,745	36	62,820	**78**	01/24/23	79	80-71	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 6	NATIVIDADR	NATIVIDAD RD	SB120	LOS COCHES AVE	E ALVIN DR	A	O	3	1,803	36	64,908	**70**	01/24/23	72	70-61	Fair (70-51)	05/24/19	SHALLOW PATCH
Dist 6	NATIVIDADR	NATIVIDAD RD	SB130	E ALVIN DR	RAINIER DR	A	P	3	1,109	36	39,924	**87**	01/24/23	87	90-81	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 4&6	NATIVIDADR	NATIVIDAD RD	SB140	RAINIER DR	S LAUREL DR	A	P	3	2,105	36	75,780	**74**	01/24/23	75	80-71	Good (90-71)		
Dist 5	NAVAJODR	NAVAJO DR	15	ADAMS ST	W CURTIS ST	C	A	2	905	38	34,390	**21**	02/16/23	25	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 5	NAVAJODR	NAVAJO DR	25	W CURTIS ST	MOHAWK AVE	C	A	2	808	37	29,896	**27**	02/16/23	30	30-21	Failed (30-0)		
Dist 5	NAVAJODR	NAVAJO DR	35	MOHAWK AVE	N 1ST ST	C	A	2	946	37	35,002	**18**	02/16/23	22	20-11	Failed (30-0)		
Dist 5	NAVAJODR	NAVAJO DR	45	N 1ST ST	N MAIN ST	C	A	2	750	41	30,750	**19**	02/16/23	23	20-11	Failed (30-0)		
Dist 4	NAVAJODR	NAVAJO DR	70	NORTH MAIN ST	NOICE ST	C	A	2	331	41	13,571	**36**	02/16/23	39	40-31	Poor (50-31)		
Dist 4	NEILST	NEIL ST	10	MERCED ST	GRIFFIN ST	R	A	2	277	38	10,551	**21**	01/18/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	NEWBRITAIN	NEW BRITAIN CIR	10	NEW SALEM DR	END	R	A	2	251	32	8,052	**69**	02/03/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 2	NEWDEALST	NEW DEAL ST	15	DEL MONTE AVE	CORTEZ ST	R	A	2	769	26	19,994	**24**	02/03/23	26	30-21	Failed (30-0)		
Dist 1	NWHMPSHCIR	NEW HAMPSHIRE CIR	10	NEW HAMPSHIRE CT	END	R	A	2	360	33	11,880	**47**	02/01/23	48	50-41	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 1	NWHMPSHCT	NEW HAMPSHIRE CT	15	RHODE ISLAND ST	MASSACHUSETTS DR	R	A	2	1,511	37	55,907	**77**	02/01/23	78	80-71	Good (90-71)		
Dist 6	NEWHAVENWA	NEW HAVEN WAY	10	NEW SALEM DR	NANTUCKET BLVD	R	A	2	365	37	13,505	**71**	02/03/23	72	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	NEWSALEMDR	NEW SALEM DR	15	BURLINGTON DR	END	R	A	2	1,248	35	43,680	**69**	02/03/23	70	70-61	Fair (70-51)		
Dist 3	NEWST	NEW ST	10	W MARKET ST	END	R	A	2	426	30	12,780	**5**	03/15/23	7	10-0	Failed (30-0)		
Dist 1	NEWCASTLED	NEWCASTLE DR	15	NANTUCKET BLVD	ROCKHAVEN CT	R	A	2	762	31	23,626	**74**	02/02/23	75	80-71	Good (90-71)		
Dist 6	NEWINGTONC	NEWINGTON CIR	10	NEWINGTON ST	END	R	A	2	145	61	8,845	**69**	02/02/23	70	70-61	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 6	NEWINGTONS	NEWINGTON ST	15	KITTERY ST	END	R	A	2	1,036	33	34,188	**72**	02/02/23	73	80-71	Good (90-71)	07/11/19	SHALLOW PATCH
Dist 6	NEWPORTCT	NEWPORT CT	10	LEXINGTON DR N. SIDE	LEXINGTON DR S. SIDE	R	A	2	1,675	32	53,600	**39**	02/03/23	41	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 6	NICHOLSAVE	NICHOLS AVE	10	LASSEN AVE	RAINIER DR	R	A	2	1,224	32	39,172	**55**	02/09/23	57	60-51	Fair (70-51)		
Dist 6	NICOLECIR	NICOLE CIR	10	BOYLE CT	END	R	A	2	167	32	5,440	**82**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	NISSENRD	NISSEN RD	10	S MAIN ST	PADRE DR	C	A	2	617	43	26,531	**58**	01/23/23	60	60-51	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	NISSENRD	NISSEN RD	25	PADRE DR	RIKER ST	C	A	2	950	43	40,850	**53**	01/23/23	55	60-51	Fair (70-51)		
Dist 1	NOGALCIR	NOGAL CIR	10	NOGAL DR	END	R	A	2	260	31	8,060	**42**	02/01/23	44	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 1	NOGALDR	NOGAL DR	010	MADRONE DR	FREEDOM PKWY	R	A	2	1,197	37	44,289	**79**	02/01/23	80	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 1	NOGALDR	NOGAL DR	020	FREEDOM PKWY	MIMBRERA WAY	C	A	2	1,638	38	62,244	**42**	02/01/23	45	50-41	Poor (50-31)		
Dist 1	NOGALDR	NOGAL DR	030	MIMBRERA WAY	LAS CASITAS DR	C	A	2	1,302	38	49,476	**33**	02/01/23	36	40-31	Poor (50-31)	09/30/19	DEEP PATCH
Dist 4	NOICEDR	NOICE DR	10	NAVAJO DR	CHAPARRAL ST	R	A	2	600	41	24,617	**46**	02/16/23	48	50-41	Poor (50-31)	04/18/19	SHALLOW PATCH
Dist 4	NOICEDR	NOICE DR	20	CHAPARRAL ST	E LAUREL DR	R	A	2	1,876	32	60,039	**25**	02/16/23	27	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 5	NORTHRIDGE	NORTHRIDGE DR	15	VAN BUREN AVE	SWANER AVE	R	A	2	2,778	37	102,812	**35**	03/02/23	37	40-31	Poor (50-31)		
Dist 5	NORTHRIDG2	NORTHRIDGE WAY	10	NORTHRIDGE DR	SAN JUAN GRADE RD	R	A	2	130	37	4,810	**47**	03/02/23	48	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	OAKST	OAK ST	15	S MAIN ST	E END	R	P	2	2,074	34	70,516	**44**	01/20/23	45	50-41	Poor (50-31)		
Dist 4	OCONNORCIR	OCONNOR CIR	10	ST BRENDAN WAY	ROSARITA DR	R	A	2	871	32	27,890	**45**	02/17/23	46	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5	OFARRELLCT	OFARRELL CT	10	LARKIN ST (N)	LARKIN ST (S)	R	A	2	1,021	32	32,672	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	OLDSTAGERD	OLD STAGE RD	060	CITY LIMITS	WILLIAMS RD	C	A	2	9,382	26	243,932	**29**	03/03/23	32	30-21	Failed (30-0)	08/05/19	DEEP PATCH
Dist 3	ORANGEDR	ORANGE DR	35	CAPISTRANO DR	S MAIN ST	R	A	2	1,829	32	58,550	**31**	01/23/23	33	40-31	Poor (50-31)	06/03/19	SHALLOW PATCH
Dist 1	ORCHARDAVE	ORCHARD AVE	10	DEL MONTE AVE	SIEBER ST	R	A	2	1,146	25	28,650	**38**	02/02/23	40	40-31	Poor (50-31)	03/20/19	DEEP PATCH
Dist 4	OREGONST	OREGON ST	10	N SANBORN RD	WASHINGTON DR	C	A	2	191	38	7,276	**16**	03/03/23	20	20-11	Failed (30-0)	03/20/19	DEEP PATCH
Dist 4	OREGONST	OREGON ST	20	WASHINGTON DR	TOWT ST	C	A	2	1,466	38	55,713	**14**	03/03/23	18	20-11	Failed (30-0)	02/07/19	DEEP PATCH
Dist 3	ORINDAWAY	ORINDA WAY	10	KENTFIELD DR	LOYOLA DR	R	A	2	633	32	20,271	**75**	01/24/23	76	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 5	OSAGEDR	OSAGE DR	15	ADAMS ST	N 1ST ST	R	A	2	2,222	32	71,112	**30**	02/16/23	32	30-21	Failed (30-0)	07/29/19	DEEP PATCH
Dist 1	OSOCT	OSO CT	10	ESTRELLA WAY (N)	ESTRELLA WAY (S)	R	A	2	1,292	32	41,344	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	OXFORDCT	OXFORD CT	10	WIMBLEDON AVE W. SIDE	WIMBLEDON AVE E. SIDE	R	A	2	1,358	32	43,456	**84**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	OYSTERBAYC	OYSTER BAY CIR	10	OYSTER BAY CT	END	R	A	2	135	35	4,725	**77**	02/03/23	78	80-71	Good (90-71)	01/01/02	REJUVENATION OIL
Dist 6	OYSTERBAY1	OYSTER BAY CT	15	MANCHESTER DR (N)	MANCHESTER DR (S)	R	A	2	1,266	38	48,108	**79**	02/03/23	80	80-71	Good (90-71)		
Dist 1	PACANACIR	PACANA CIR	10	NOGAL DR	END	R	A	2	160	31	4,960	**74**	02/01/23	75	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 4	PACHECOST	PACHECO ST	15	TAMPICO AVE	NATIVIDAD RD	R	A	2	1,140	32	36,502	**26**	02/17/23	28	30-21	Failed (30-0)		
Dist 1	PACIFICAVE	PACIFIC AVE	10	GARNER AVE	DEL MONTE AVE	R	A	2	1,544	23	35,512	**25**	02/02/23	27	30-21	Failed (30-0)	03/20/19	DEEP PATCH
Dist 1	PACIFICAVE	PACIFIC AVE	20	DEL MONTE AVE	AMARILLO WAY	R	A	2	1,154	38	43,852	**43**	02/02/23	45	50-41	Poor (50-31)		
Dist 2	PADOVADR	PADOVA DR	10	PALERMO DR	FREEDOM PKWY	R	A	2	697	37	25,789	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	PADREDR	PADRE DR	010	W ACACIA ST	W ROMIE LN	R	A	2	738	32	23,616	**29**	01/23/23	31	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 3	PADREDR	PADRE DR	020	W ROMIE LN	W SAN JOAQUIN ST	R	A	2	1,226	32	39,232	**40**	01/23/23	42	40-31	Poor (50-31)	07/16/19	DEEP PATCH
Dist 3	PADREDR	PADRE DR	030	W SAN JOAQUIN ST	NISSEN RD	R	A	2	457	42	19,194	**37**	01/23/23	39	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 3	PADREDR	PADRE DR	040	NISSEN RD	W BLANCO RD	R	A	2	762	37	28,194	**24**	01/23/23	26	30-21	Failed (30-0)	09/01/20	SKIN PATCH
Dist 3	PADREDR	PADRE DR	050	W BLANCO RD	END	R	A	2	293	38	11,134	**33**	01/23/23	35	40-31	Poor (50-31)	05/15/19	SLURRY SEAL
Dist 3	PAJAROCIR	PAJARO CIR	10	PAJARO ST	END	R	A	2	198	32	6,340	**57**	01/19/23	58	60-51	Fair (70-51)	01/01/01	CAPE SEAL
Dist 3	PAJAROST	PAJARO ST	010	E MARKET ST	JOHN ST	A	A	2	2,708	50	135,400	**65**	01/20/23	67	70-61	Fair (70-51)	05/21/19	DEEP PATCH
Dist 3	PAJAROST	PAJARO ST	020	JOHN ST	MAPLE ST	A	C	2	974	50	48,700	**46**	01/20/23	48	50-41	Poor (50-31)		
Dist 3	PAJAROST	PAJARO ST	030	MAPLE ST	PINE ST	A	C	2	969	50	48,450	**52**	01/20/23	54	60-51	Fair (70-51)		
Dist 3	PAJAROST	PAJARO ST	040	PINE ST	E ROMIE LN	A	C	2	1,256	50	62,800	**49**	01/20/23	51	50-41	Poor (50-31)		
Dist 3	PAJAROST	PAJARO ST	050	E ROMIE LN	SAN MIGUEL AVE	A	C	2	1,142	50	57,100	**23**	01/20/23	27	30-21	Failed (30-0)		
Dist 3	PAJAROST	PAJARO ST	060	SAN MIGUEL AVE	SAN PEDRO ST	A	C	2	710	32	22,720	**23**	01/20/23	27	30-21	Failed (30-0)		
Dist 3	PAJAROST	PAJARO ST	070	SAN PEDRO ST	E BLANCO RD	A	C	2	1,166	32	37,312	**64**	01/20/23	65	70-61	Fair (70-51)		
Dist 3	PAJAROWAY	PAJARO WAY	10	PAJARO ST	END	R	A	2	246	34	8,364	**67**	01/19/23	69	70-61	Fair (70-51)	07/05/19	DEEP PATCH
Dist 2	PALERMOCT	PALERMO CT	10	PALERMO DR	BELLAGIO WAY	R	A	2	939	32	30,048	**84**	03/15/23	85	90-81	Good (90-71)		
Dist 2	PALERMODR	PALERMO DR	010	MONTE BELLA BLVD (S)	CAMPANIA WAY	C	A	2	1,820	37	67,340	**87**	03/15/23	88	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	PALERMODR	PALERMO DR	020	CAMPANIA CIR	PADOVA DR	C	A	2	697	37	25,789	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PALERMODR	PALERMO DR	030	PADOVA DR	MODENA WAY	C	A	2	546	37	20,202	**88**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PALERMODR	PALERMO DR	040	MODENA WAY	MONTE BELLA BLVD (N)	C	A	2	334	37	12,358	**89**	08/15/23	89	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	PALMADR	PALMA DR	010	UNIVERSITY AVE	W ALISAL ST	R	C	2	1,620	38	61,560	**34**	01/24/23	36	40-31	Poor (50-31)		
Dist 3	PALMADR	PALMA DR	020	W ALISAL ST	IVERSON ST	R	C	2	3,060	38	116,280	**44**	01/24/23	46	50-41	Poor (50-31)		
Dist 1	PALMERAAVE	PALMERA AVE	15	LA MANCHA WAY	CORTINA WAY	R	A	2	1,345	37	49,765	**75**	02/03/23	76	80-71	Good (90-71)		
Dist 3	PALMETTOST	PALMETTO ST	10	W MARKET ST	RAILROAD AVE	R	A	2	270	52	14,040	**47**	03/15/23	48	50-41	Poor (50-31)		
Dist 3	PALOALTOWA	PALO ALTO WAY	10	KENTFIELD DR	LOYOLA DR	R	A	2	634	32	20,291	**74**	01/24/23	75	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 2	PALOMAAVE	PALOMA AVE	10	QUILLA ST	E MARKET ST	R	A	2	1,216	40	48,640	**56**	03/13/23	57	60-51	Fair (70-51)	01/09/19	DEEP PATCH
Dist 2	PALOMAAVE	PALOMA AVE	20	E MARKET ST	TAMPA ST	R	A	2	840	40	33,600	**34**	03/13/23	36	40-31	Poor (50-31)		
Dist 2	PALOMAAVE	PALOMA AVE	30	TAMPA ST	MIAMI ST	R	A	2	1,142	34	38,828	**24**	03/13/23	26	30-21	Failed (30-0)		
Dist 2	PALOMAAVE	PALOMA AVE	40	MIAMI ST	MARGARET ST	R	A	2	747	34	25,398	**66**	03/13/23	67	70-61	Fair (70-51)		
Dist 3	PARAISOCT	PARAISO CT	10	VIA PARAISO (N)	VIA PARAISO (S)	R	A	2	970	32	31,040	**17**	01/19/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	PARKROW	PARK ROW	10	W ROMIE LN	W ACACIA ST	R	A	2	737	32	23,598	**58**	03/16/23	59	60-51	Fair (70-51)	03/19/19	SHALLOW PATCH
Dist 3	PARKROW	PARK ROW	20	W ACACIA ST	END	R	A	2	253	32	8,097	**76**	03/19/19	83	80-71	Good (90-71)	03/19/19	SHALLOW PATCH
Dist 3	PARKST	PARK ST	010	CAPITOL ST	HOMESTEAD AVE	R	P	2	1,281	40	51,240	**49**	03/16/23	50	50-41	Poor (50-31)		
Dist 3	PARKST	PARK ST	020	HOMESTEAD AVE	NACIONAL ST	R	P	2	1,278	40	51,120	**46**	03/16/23	47	50-41	Poor (50-31)	08/01/19	SHALLOW PATCH
Dist 3	PARKST	PARK ST	030	NACIONAL ST	BELMONT DR	R	A	2	1,524	32	48,768	**20**	03/16/23	22	20-11	Failed (30-0)	10/18/19	DEEP PATCH
Dist 5	PARKSIDEST	PARKSIDE ST	10	ROCHEX AVE	W LAUREL DR	R	A	2	500	32	16,000	**26**	02/16/23	28	30-21	Failed (30-0)		
Dist 5	PARKSIDEST	PARKSIDE ST	20	W LAUREL DR	S END	R	A	2	925	38	35,150	**30**	02/16/23	32	30-21	Failed (30-0)		
Dist 4	PARKWAYRD	PARKWAY RD	15	N SANBORN RD	EUCALYPTUS DR	R	A	2	1,027	32	32,887	**24**	03/03/23	26	30-21	Failed (30-0)	09/30/19	DEEP PATCH
Dist 4	PARSONSAVE	PARSONS AVE	15	BLOCK AVE	RAINIER DR	R	A	2	954	32	30,529	**31**	02/09/23	33	40-31	Poor (50-31)	02/27/19	DEEP PATCH
Dist 1	PARTRIDGES	PARTRIDGE ST	15	FALCON DR	END	R	A	2	831	32	26,592	**78**	02/01/23	79	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 1	PARTRIDGEW	PARTRIDGE WAY	10	FALCON DR	PARTRIDGE ST	R	A	2	210	37	7,770	**80**	02/01/23	81	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 3	PASATIEMPO	PASATIEMPO WAY	15	N. END	S. END	R	A	2	627	32	20,064	**66**	01/23/23	67	70-61	Fair (70-51)	05/24/19	SHALLOW PATCH
Dist 1	PASEOGRAND	PASEO GRANDE	15	N SANBORN RD	GAVIOTA DR	R	A	2	2,083	38	79,182	**79**	02/03/23	80	80-71	Good (90-71)		
Dist 2	PAVIACIR	PAVIA CIR	10	PALERMO DR	END	R	A	2	262	32	8,384	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	PAVIAWAY	PAVIA WAY	10	PALERMO DR	SCONBERG PKWY	R	A	2	470	37	17,390	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 6	PEACEFULCO	PEACEFUL COVE WAY	10	MANCHESTER DR	LITTLE RIVER DR	R	A	2	401	32	12,848	**77**	03/16/23	78	80-71	Good (90-71)		
Dist 4	PEACHDR	PEACH DR	15	CALLE CEBU	COMMISSION ST	R	A	2	952	32	30,488	**16**	01/26/23	18	20-11	Failed (30-0)	06/17/19	DEEP PATCH

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	PEARLALY	PEARL ALY	10	S PEARL ST	220' E/O S PEARL ST	R	A	2	220	20	4,400	**15**	01/19/23	17	20-11	Failed (30-0)		
Dist 2	PEARLALY	PEARL ALY	20	220' E/O S PEARL ST	S HEBBRON AVE	R	P	2	170	20	3,400	**55**	01/19/23	56	60-51	Fair (70-51)		
Dist 3	PELLETTAVE	PELLETT AVE	15	S SANBORN RD	VERTIN AVE	R	A	2	1,062	41	43,542	**66**	01/17/23	67	70-61	Fair (70-51)		
Dist 6	PENNSYLVAN	PENNSYLVANIA DR	15	MCKINNON ST	END	R	A	2	1,601	41	65,641	**77**	08/15/23	78	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	PENWICKCIR	PENWICK CIR	10	ROCKHAVEN CT	END	R	A	2	253	32	8,107	**71**	02/02/23	72	80-71	Good (90-71)	01/01/00	REJUVENATION OIL
Dist 5	PEREZCIR	PEREZ CIR	10	PEREZ ST	END	R	A	2	245	37	9,065	**51**	03/02/23	52	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 5	PEREZST	PEREZ ST	10	S END	E BOLIVAR ST	R	A	2	165	32	5,280	**28**	03/02/23	30	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 5	PEREZST	PEREZ ST	20	E BOLIVAR ST	END	R	A	2	822	36	29,592	**52**	03/02/23	53	60-51	Fair (70-51)		
Dist 6	PESCADEROD	PESCADERO DR	10	INGLEWOOD ST	ARCADIA WAY	R	A	2	608	32	19,456	**25**	02/04/23	27	30-21	Failed (30-0)		
Dist 6	PESCADEROD	PESCADERO DR	20	ARCADIA WAY	LOS COCHES AVE	R	A	2	2,636	37	97,532	**24**	02/04/23	26	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 2	PIAZZACIR	PIAZZA CIR	10	PIAZZA DR	END	R	A	2	210	32	6,720	**82**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PIAZZADR	PIAZZA DR	15	MONTE BELLA BLVD	END	R	A	2	2,696	37	99,752	**88**	08/15/23	89	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	PICKFORDWA	PICKFORD WAY	10	DECLARATION ST	ROCKHAVEN CT	R	A	2	258	32	8,261	**65**	02/02/23	66	70-61	Fair (70-51)	01/01/00	REJUVENATION OIL
Dist 3	PICOBLANCO	PICO BLANCO ST	10	SAN BLANCO DR	LUTHER WAY	R	A	2	357	37	13,209	**73**	01/23/23	74	80-71	Good (90-71)	05/15/19	SLURRY SEAL
Dist 5	PIERCEST	PIERCE ST	10	NORTHRIDGE DR	SWANER AVE	R	A	2	464	32	14,848	**48**	03/17/23	49	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 4	PIKEWAY	PIKE WAY	10	PARSONS AVE	LINWOOD DR	R	A	2	266	32	8,512	**22**	02/09/23	24	30-21	Failed (30-0)		
Dist 6	PIKEWAY	PIKE WAY	20	LINWOOD DR	NICHOLS AVE	R	A	2	295	32	9,440	**26**	02/09/23	28	30-21	Failed (30-0)		
Dist 5	PIMACIR	PIMA CIR	10	CHEROKEE DR	END	R	A	2	180	32	5,760	**17**	02/16/23	19	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	PINEST	PINE ST	25	CARMEL AVE	S MAIN ST	R	P	2	2,271	34	77,214	**52**	01/20/23	53	60-51	Fair (70-51)	03/05/19	DEEP PATCH
Dist 1	PINOWAY	PINO WAY	10	LAS CASITAS DR	ALAMO WAY	R	A	2	832	32	26,638	**43**	02/02/23	45	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 2	PISACIR	PISA CIR	10	PALERMO DR	END	R	A	2	181	32	5,792	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 6	PLACERWAY	PLACER WAY	10	WESTMINSTER DR	MENDOCINO DR	R	A	2	698	40	27,920	**58**	02/17/23	59	60-51	Fair (70-51)		
Dist 3	PLAZACIR	PLAZA CIR	10	S MAIN ST	END	R	A	2	448	38	17,024	**53**	01/19/23	54	60-51	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 6	PLUMASWAY	PLUMAS WAY	10	GLACIER DR	MARIN AVE	R	A	2	889	32	28,475	**29**	02/09/23	31	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	POLKCIR	POLK CIR	10	POLK ST	END	R	A	2	210	25	5,250	**22**	02/17/23	24	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	POLKST	POLK ST	10	TULANE ST	W LAUREL DR	R	A	2	946	30	28,380	**34**	02/17/23	36	40-31	Poor (50-31)	02/14/19	DEEP PATCH
Dist 5	POLKST	POLK ST	20	W LAUREL DR	TYLER ST	R	A	2	2,237	32	71,614	**42**	02/17/23	44	50-41	Poor (50-31)		
Dist 4	POPLARST	POPLAR ST	10	PARKWAY RD	E MARKET ST	R	A	2	408	36	14,713	**23**	03/03/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	PORTSMOUTH	PORTSMOUTH WAY	10	HARTFORD ST	COVENTRY ST	R	A	2	522	32	16,722	**73**	03/16/23	74	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 5	POSTDR	POST DR	10	N DAVIS RD	CALLE DEL ADOBE	A	O	4	1,000	66	66,000	**40**	02/10/23	42	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 4&5	POTREROWAY	POTRERO WAY	10	SLOAT DR	GENEVA WAY	R	A	2	201	32	6,432	**75**	02/09/23	77	80-71	Good (90-71)	05/13/19	SLURRY SEAL
Dist 5	POTREROWAY	POTRERO WAY	20	GENEVA WAY	VICTOR ST	R	A	2	655	32	20,960	**75**	02/09/23	76	80-71	Good (90-71)	05/13/19	SLURRY SEAL
Dist 4	POWELLST	POWELL ST	15	W ROSSI ST	END	R	A	2	2,292	34	77,938	**47**	03/02/23	48	50-41	Poor (50-31)		
Dist 4	PRADERST	PRADER ST	10	RIANDA ST	E ALISAL ST	R	A	2	313	37	11,581	**19**	01/18/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	PRADOST	PRADO ST	10	W END	PEREZ ST	R	A	2	296	34	10,064	**37**	03/02/23	39	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 5	PRADOST	PRADO ST	20	PEREZ ST	NE END	R	A	2	665	32	21,284	**54**	03/02/23	55	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 4	PRESCOTTCI	PRESCOTT CIR	10	ARGUELLO DR	END	R	A	2	166	34	5,644	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	PRESTONST	PRESTON ST	10	MARTELLA ST	END	R	A	2	338	28	9,464	**23**	03/16/23	25	30-21	Failed (30-0)	04/15/21	SKIN PATCH
Dist 3	PRIMAVERAS	PRIMAVERA ST	15	KIPLING ST	COLERIDGE DR	R	A	2	705	37	26,085	**64**	01/23/23	65	70-61	Fair (70-51)	05/13/19	SLURRY SEAL
Dist 3	PRIMAVERAW	PRIMAVERA WAY	10	PRIMAVERA ST	KIPLING ST	R	A	2	726	32	23,232	**49**	01/23/23	51	50-41	Poor (50-31)	05/13/19	SLURRY SEAL
Dist 5	PRIMROSEDR	PRIMROSE DR	10	HEATHER DR	LUPIN DR	R	A	2	768	32	24,595	**26**	03/01/23	28	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	PRINCEPL	PRINCE PL	10	S HEBBRON AVE (N)	S HEBBRON AVE (S)	R	A	2	918	32	29,376	**37**	01/19/23	39	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	PRINCETONC	PRINCETON CIR	10	PRINCETON CT	END	R	A	2	175	31	5,425	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	PRINCETON1	PRINCETON CT	15	PENNSYLVANIA DR (W)	PENNSYLVANIA DR (E)	R	A	2	1,271	33	41,943	**84**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	PROVINCETO	PROVINCETOWN CIR	10	PROVINCETOWN DR	END	R	A	2	310	32	9,920	**73**	02/03/23	74	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	PROVINCET1	PROVINCETOWN DR	10	LEXINGTON DR (S)	LEXINGTON DR (N)	R	A	2	1,484	32	47,488	**76**	02/03/23	77	80-71	Good (90-71)		
Dist 6	PROVINCET1	PROVINCETOWN DR	20	LEXINGTON DR	INDEPENDENCE BLVD	R	A	2	422	37	15,614	**76**	02/03/23	77	80-71	Good (90-71)		
Dist 6	PROVINCET1	PROVINCETOWN DR	30	INDEPENDENCE BLVD	PROVINCETOWN WAY	R	A	2	907	32	29,024	**64**	02/03/23	65	70-61	Fair (70-51)	07/03/19	SHALLOW PATCH
Dist 6	PROVINCET1	PROVINCETOWN DR	40	PROVINCETOWN WAY	SW END	R	A	2	404	34	13,736	**64**	02/03/23	65	70-61	Fair (70-51)		
Dist 6	PROVINCET2	PROVINCETOWN WAY	10	HIDDEN CREEK CIR	INDEPENDENCE BLVD	R	A	2	144	37	5,328	**64**	02/03/23	65	70-61	Fair (70-51)		
Dist 5	PUEBLODR	PUEBLO DR	15	ADAMS ST	N 1ST ST	R	A	2	2,447	32	78,314	**20**	02/16/23	22	20-11	Failed (30-0)	02/22/19	DEEP PATCH
Dist 3	QUAILRUNCI	QUAIL RUN CIR	10	W ROSSI ST	END	R	A	2	630	42	26,460	**76**	03/02/23	77	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 2	QUILLAST	QUILLA ST	15	E MARKET ST	WILLIAMS RD	R	A	2	1,418	35	49,630	**69**	03/13/23	70	70-61	Fair (70-51)	04/26/19	SLURRY SEAL
Dist 2	QUILLAST	QUILLA ST	25	WILLIAMS ROAD	E ALISAL ST	R	A	2	345	37	12,765	**23**	03/13/23	25	30-21	Failed (30-0)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 5	QUINTEROCI	QUINTERO CIR	15	CHEROKEE DR	END	R	A	2	530	32	16,960	**57**	02/10/23	58	60-51	Fair (70-51)		
Dist 4	RAGSDALECT	RAGSDALE CT	10	E MARKET ST	END	R	P	2	99	18	1,782	**65**	01/26/23	66	70-61	Fair (70-51)		
Dist 4	RAGSDALECT	RAGSDALE CT	20	ROOSEVELT ST	RAGSDALE CT	R	P	2	332	30	9,960	**64**	01/26/23	65	70-61	Fair (70-51)		
Dist 4	RAGSDALECT	RAGSDALE CT	30	RAGSDALE CT	RAGSDALE CT	R	P	2	203	34	6,902	**58**	01/26/23	59	60-51	Fair (70-51)		
Dist 4	RAGSDALECT	RAGSDALE CT	40	RAGSDALE CT	ROOSEVELT ST	R	P	2	345	32	11,040	**59**	01/26/23	60	60-51	Fair (70-51)		
Dist 4	RAINIERDR	RAINIER DR	015	SHIRES WAY	LINWOOD DR	R	A	2	892	32	28,568	**46**	02/09/23	47	50-41	Poor (50-31)	03/26/19	DEEP PATCH
Dist 4&6	RAINIERDR	RAINIER DR	045	NATIVIDAD RD	LINWOOD DR	R	A	2	2,600	32	83,215	**61**	02/09/23	62	70-61	Fair (70-51)	12/15/20	SKIN PATCH
Dist 4	RAMONAAVE	RAMONA AVE	10	E LAUREL DR	RAINIER DR	R	A	2	2,051	32	65,632	**56**	02/09/23	57	60-51	Fair (70-51)	06/24/19	DEEP PATCH
Dist 6	RAMONAAVE	RAMONA AVE	20	RAINIER DR	GLACIER DR	R	A	2	997	32	31,904	**43**	02/09/23	45	50-41	Poor (50-31)		
Dist 1	RANCHERODR	RANCHERO DR	15	LAS CASITAS DR	LA HONDA CT	R	A	2	1,376	32	44,032	**29**	02/02/23	31	30-21	Failed (30-0)	03/06/19	DEEP PATCH
Dist 1	RAVENCT	RAVEN CT	10	COUGAR DR (N)	COUGAR DR (S)	R	A	2	1,212	33	39,996	**79**	02/01/23	80	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 4	REATAST	REATA ST	15	TAPADERO DR	LINWOOD DR	R	A	2	2,281	32	73,022	**27**	02/17/23	29	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 6	REDONDOWAY	REDONDO WAY	10	COMPTON WAY	GLENDORA WAY	R	A	2	1,091	32	34,928	**34**	02/04/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	REDWOODPL	REDWOOD PL	10	WOODSIDE DR	END	R	A	2	222	32	7,120	**36**	01/23/23	38	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	REGENCYCIR	REGENCY CIR	10	HARDEN PKWY	END	R	A	2	658	42	27,636	**71**	02/17/23	72	80-71	Good (90-71)	01/01/02	SLURRY SEAL
Dist 6	REXCIR	REX CIR	10	WELLINGTON CT	END	R	A	2	135	37	4,995	**79**	02/02/23	80	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	RHINECIR	RHINE CIR	10	RIESLING WAY	END	R	A	2	240	33	7,920	**68**	03/01/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	RHINECT	RHINE CT	10	RIESLING WAY (W)	RIESLING WAY (E)	R	A	2	1,089	33	35,955	**70**	03/01/23	71	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 1	RHDISLDCIR	RHODE ISLAND CIR	10	RHODE ISLAND ST	END	R	A	2	285	33	9,405	**43**	02/01/23	45	50-41	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 1	RHDISLDST	RHODE ISLAND ST	010	CONSTITUTION BLVD	RHODE ISLAND CIR	R	A	2	576	37	21,312	**77**	02/01/23	78	80-71	Good (90-71)		
Dist 1	RHDISLDST	RHODE ISLAND ST	020	RHODE ISLAND CIR	END	R	A	2	235	33	7,755	**76**	02/01/23	77	80-71	Good (90-71)		
Dist 4	RIANDACIR	RIANDA CIR	20	PRADER ST	END	R	A	2	510	42	21,420	**22**	01/18/23	24	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	RIANDAST	RIANDA ST	10	GRIFFIN ST	PRADER ST	R	A	2	918	37	33,990	**45**	01/18/23	47	50-41	Poor (50-31)	01/31/19	DEEP PATCH
Dist 5	RICOCIR	RICO CIR	10	LARKIN ST	END	R	A	2	455	36	16,380	**68**	03/01/23	69	70-61	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 3	RICOST	RICO ST	010	W LAKE ST	W ROSSI ST	C	A	2	545	41	22,345	**53**	03/01/23	55	60-51	Fair (70-51)		
Dist 4	RICOST	RICO ST	020	W ROSSI ST	HYDE ST	C	A	2	929	41	38,089	**50**	03/01/23	52	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 4&5	RICOST	RICO ST	030	HYDE ST	CASENTINI ST	C	A	2	389	41	15,949	**45**	03/01/23	48	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 5	RICOST	RICO ST	040	CASENTINI ST	LARKIN ST	C	A	2	836	41	34,276	**25**	03/01/23	28	30-21	Failed (30-0)	02/27/19	DEEP PATCH
Dist 1	RIDERAVE	RIDER AVE	005	GEE ST	GARNER AVE	R	A	2	757	38	28,766	**19**	02/01/23	21	20-11	Failed (30-0)	03/06/19	DEEP PATCH
Dist 1	RIDERAVE	RIDER AVE	010	GARNER AVE	LAS CASITAS DR	C	A	2	1,864	38	70,832	**16**	02/01/23	20	20-11	Failed (30-0)		
Dist 1	RIDERAVE	RIDER AVE	020	LAS CASITAS DR	MIMBRERA WAY	C	A	2	1,222	38	46,436	**20**	02/01/23	24	20-11	Failed (30-0)	04/02/19	DEEP PATCH
Dist 1	RIDERAVE	RIDER AVE	025	MIMBRERA WAY	ANTIGUA AVE	C	A	2	1,165	38	44,270	**59**	02/01/23	61	60-51	Fair (70-51)	03/07/19	DEEP PATCH
Dist 1	RIDERAVE	RIDER AVE	030	ANTIGUA AVE	FREEDOM PKWY	C	A	2	520	42	21,840	**73**	02/01/23	75	80-71	Good (90-71)		
Dist 1	RIDERAVE	RIDER AVE	035	FREEDOM PKWY	E BORONDA RD	C	A	2	1,975	41	80,975	**78**	02/01/23	80	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	RIESLINGWA	RIESLING WAY	15	RHINE CIR	BURGUNDY WAY	R	A	2	915	32	29,304	**72**	03/01/23	73	80-71	Good (90-71)		
Dist 3	RIKERCIR	RIKER CIR	10	RIKER ST	END	R	A	2	126	32	4,035	**43**	01/23/23	45	50-41	Poor (50-31)	05/20/19	SLURRY SEAL
Dist 3	RIKERST	RIKER ST	010	W MARKET ST	320' S/O W MARKET ST	R	A	2	320	37	11,840	**14**	01/23/23	16	20-11	Failed (30-0)		
Dist 3	RIKERST	RIKER ST	020	320' S/O W MARKET ST	CENTRAL AVE	R	P	2	1,075	40	43,000	**59**	01/23/23	60	60-51	Fair (70-51)	06/18/19	DEEP PATCH
Dist 3	RIKERST	RIKER ST	110	W ALISAL ST	CLAY ST	A	P	2	1,116	40	44,640	**43**	01/23/23	44	50-41	Poor (50-31)	10/31/19	DEEP PATCH
Dist 3	RIKERST	RIKER ST	120	CLAY ST	W ACACIA ST	A	A	2	1,431	38	54,378	**26**	01/23/23	29	30-21	Failed (30-0)	06/14/21	SKIN PATCH
Dist 3	RIKERST	RIKER ST	130	W ACACIA ST	W ROMIE LN	A	A	2	1,000	38	38,000	**33**	01/23/23	36	40-31	Poor (50-31)	06/14/21	SKIN PATCH
Dist 3	RIKERST	RIKER ST	140	W ROMIE LN	W BLANCO RD	A	A	2	1,963	37	72,631	**23**	01/23/23	26	30-21	Failed (30-0)	07/11/19	SHALLOW PATCH
Dist 3	RIKERST	RIKER ST	150	W BLANCO RD	KIPLING ST	R	A	2	1,506	38	57,228	**36**	01/23/23	38	40-31	Poor (50-31)	05/20/19	SLURRY SEAL
Dist 3	RIKERTER	RIKER TER	10	W ALISAL ST	END	R	A	2	1,072	32	34,310	**22**	01/23/23	24	30-21	Failed (30-0)	02/04/19	DEEP PATCH
Dist 4	RINCONAVE	RINCON AVE	10	CENTER ST	EAST ST	R	A	2	700	32	22,413	**47**	03/13/23	48	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	RIOVERDEDR	RIO VERDE DR	10	LA MESA DR	SAN JUAN DR	R	A	2	1,633	32	52,265	**54**	01/19/23	55	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 6	RIVERTONWA	RIVERTON WAY	10	HARTFORD ST	COVENTRY ST	R	A	2	636	32	20,382	**76**	02/04/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 5	ROCHEXAVE	ROCHEX AVE	15	N MAIN ST	CRESCENT WAY	R	A	2	2,658	33	87,714	**24**	02/16/23	26	30-21	Failed (30-0)		
Dist 1	ROCKHAVENC	ROCKHAVEN CT	15	NEWCASTLE DR (N)	NEWCASTLE DR (S)	R	A	2	2,046	32	65,472	**69**	02/02/23	70	70-61	Fair (70-51)		
Dist 6	ROCKPORTWA	ROCKPORT WAY	15	BEACON HILL DR	BOSTON ST	R	A	2	856	37	31,672	**79**	02/02/23	80	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 1	ROCKROSEST	ROCKROSE ST	15	BUCKHORN DR	END	R	A	2	877	37	32,449	**73**	02/01/23	74	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	ROCKROSEWA	ROCKROSE WAY	10	BUCKHORN DR	ROCKROSE ST	R	A	2	200	37	7,400	**80**	02/01/23	81	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 5	RODEOAVE	RODEO AVE	15	N 1ST ST	W CURTIS ST	R	A	2	1,286	34	43,724	**29**	02/16/23	31	30-21	Failed (30-0)		
Dist 6	ROGGERD	ROGGE RD	010	NATIVIDAD RD	2725' W/O NATIVIDAD RD (COP)	R	A	2	2,725	32	87,200	**31**	03/03/23	33	40-31	Poor (50-31)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	ROGGERD	ROGGE RD	020	2725' W/O NATIVIDAD RD (COP)	CITY LIMITS	MiA	A	2	1,680	38	63,840	**75**	03/03/23	76	80-71	Good (90-71)		
Dist 4	ROOSEVELTS	ROOSEVELT ST	15	KERN ST	N PEARL ST	R	A	2	2,049	41	84,009	**44**	01/19/23	46	50-41	Poor (50-31)		
Dist 4	ROSARITADR	ROSARITA DR	15	SANTA TERESA WAY	E BERNAL DR	R	A	2	2,102	32	67,269	**70**	02/17/23	71	70-61	Fair (70-51)		
Dist 3	ROSEST	ROSE ST	10	WEST ST	END	R	C	2	230	32	7,383	**23**	03/15/23	25	30-21	Failed (30-0)		
Dist 2	ROSSANOCIR	ROSSANO CIR	10	ROSSANO WAY	END	R	A	2	244	32	7,808	**87**	03/15/23	88	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	ROSSANOCT	ROSSANO CT	15	PALERMO DR (N)	PALERMO DR (S)	R	A	2	1,321	33	43,593	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	ROSSANOWAY	ROSSANO WAY	15	ROSSANO CT	VENICE WAY	R	A	2	567	32	18,144	**84**	03/15/23	85	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 4	ROSSIALY	ROSSI ALY	010	MARKET WAY	START PCC	R	G	1	510	14	7,140			0	None	Other		
Dist 4	ROSSIALY	ROSSI ALY	020	START PCC	E ROSSI ST	R	P	1	175	14	2,450	**66**	03/17/23	67	70-61	Fair (70-51)		
Dist 3	ROSSICIR	ROSSI CIR	10	W ROSSI ST	END	R	A	2	463	42	19,446	**78**	03/02/23	79	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 2	ROYDIAZST	ROY DIAZ ST	010	END	AIRPORT BLVD	C	A	2	2,082	62	129,084	**79**	01/17/23	81	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 5	RUSSELLRD	RUSSELL RD	60	PAUL AVE	SAN JUAN GRADE RD	A	A	2	332	32	10,624	**18**	02/09/23	21	20-11	Failed (30-0)	01/09/19	DEEP PATCH
Dist 3	SACACIACIR	S ACACIA CIR	10	W ACACIA ST	END	R	A	2	147	32	4,732	**21**	03/16/23	23	30-21	Failed (30-0)	09/01/20	SKIN PATCH
Dist 1	SELMDR	S ELM DR	10	RIDER AVE	END	R	A	2	325	32	10,400	**3**	03/16/23	5	10-0	Failed (30-0)		
Dist 2	SFILICEST	S FILICE ST	15	E ALISAL ST	JOHN ST	R	A	2	1,366	38	51,908	**29**	03/13/23	31	30-21	Failed (30-0)	10/06/21	SKIN PATCH
Dist 2	SHEBBRONAV	S HEBBRON AVE	15	E ALISAL ST	JOHN ST	C	A	2	1,290	36	46,440	**24**	03/13/23	27	30-21	Failed (30-0)	03/13/19	DEEP PATCH
Dist 2	SMADEIRAAV	S MADEIRA AVE	15	JAMES ST	E ALISAL ST	C	A	2	872	42	36,624	**54**	01/26/23	56	60-51	Fair (70-51)		
Dist 2	SPEARLST	S PEARL ST	15	E ALISAL ST	END	R	A	2	329	32	10,528	**38**	03/13/23	39	40-31	Poor (50-31)	05/10/19	SHALLOW PATCH
Dist 3	SSANBORNRD	S SANBORN RD	010NB	ABBOTT ST	RAILROAD Ovepass (PCC START)	A	A	2	972	30	29,160	**41**	01/18/23	43	50-41	Poor (50-31)	01/01/82	1-1/2" OVERLAY
Dist 3	SSANBORNRD	S SANBORN RD	020NB	RAILROAD Overpass (PCC START)	RAILROAD Overpass (PCC END)	A	P	2	850	20	17,000	**72**	01/18/23	73	80-71	Good (90-71)		
Dist 3	SSANBORNRD	S SANBORN RD	030NB	RAILROAD Overpass (PCC END)	PELLETT AVE	A	A	2	225	20	4,500	**39**	01/18/23	42	40-31	Poor (50-31)	01/01/83	SLURRY SEAL
Dist 3	SSANBORNRD	S SANBORN RD	040NB	PELLETT AVE	ELVEE DR	A	A	2	1,830	20	36,600	**50**	01/18/23	52	50-41	Poor (50-31)	04/30/19	SEAL CRACKS
Dist 2	SSANBORNRD	S SANBORN RD	050NB	ELVEE DR	FAIRWAY AVE	A	A	2	433	26	11,258	**54**	01/18/23	56	60-51	Fair (70-51)	04/30/19	SEAL CRACKS
Dist 2	SSANBORNRD	S SANBORN RD	060NB	FAIRVIEW AVE	JOHN ST	A	O	2	792	38	30,096	**37**	01/18/23	39	40-31	Poor (50-31)	04/30/19	SEAL CRACKS
Dist 2	SSANBORNRD	S SANBORN RD	070NB	JOHN ST	E ALISAL ST	A	O	2	1,325	33	43,725	**53**	01/18/23	55	60-51	Fair (70-51)	01/01/89	2" OVERLAY
Dist 2	SSANBORNRD	S SANBORN RD	SB010	E ALISAL ST	JOHN ST	A	A	2	1,325	25	33,125	**55**	01/18/23	57	60-51	Fair (70-51)		
Dist 2	SSANBORNRD	S SANBORN RD	SB020	JOHN ST	FAIRVIEW AVE	A	A	2	792	40	31,680	**42**	01/18/23	44	50-41	Poor (50-31)	04/30/19	SEAL CRACKS
Dist 2	SSANBORNRD	S SANBORN RD	SB030	FAIRWAY AVE	ELVEE DR	A	A	2	424	40	16,960	**53**	01/18/23	55	60-51	Fair (70-51)	04/30/19	SEAL CRACKS
Dist 3	SSANBORNRD	S SANBORN RD	SB040	ELVEE DR	PELLETT AVE	A	A	2	1,830	20	36,600	**47**	01/18/23	49	50-41	Poor (50-31)	04/30/19	SEAL CRACKS
Dist 3	SSANBORNRD	S SANBORN RD	SB050	PELLETT AVE	RAILROAD Overpass (PCC START)	A	A	2	227	20	4,540	**46**	01/18/23	48	50-41	Poor (50-31)		
Dist 3	SSANBORNRD	S SANBORN RD	SB060	RAILROAD Overpass (PCC START)	RAILROAD Overpass (PCC END)	A	P	2	850	20	17,000	**72**	01/18/23	73	80-71	Good (90-71)		
Dist 3	SSANBORNRD	S SANBORN RD	SB070	RAILROAD Overpass (PCC END)	ABBOTT ST	A	A	2	980	30	29,400	**44**	01/18/23	46	50-41	Poor (50-31)	01/01/82	1-1/2" OVERLAY
Dist 2	SWOODST	S WOOD ST	15	JOHN ST	E ALISAL ST	R	A	2	1,228	41	50,348	**33**	01/26/23	35	40-31	Poor (50-31)	02/19/21	SKIN PATCH
Dist 1	SAGECT	SAGE CT	15	CHAMISE CT (N)	CHAMISE CT (S)	R	A	2	1,656	34	56,304	**80**	02/01/23	81	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	SAGEWAY	SAGE WAY	10	SAGE CT	BUCKHORN DR	R	A	2	150	37	5,550	**80**	02/01/23	81	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	SAGUAROCIR	SAGUARO CIR	10	TUMBLEWEED DR	NE END	R	A	2	411	32	13,152	**80**	02/01/23	81	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 1	SAGUARODR	SAGUARO DR	15	BUCKHORN DR	TUMBLEWEED DR	R	A	2	817	37	30,229	**78**	02/01/23	79	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 3	SALINASST	SALINAS ST	10	W MARKET ST	JOHN ST	A	C	2	2,336	37	86,432	**50**	01/26/23	52	50-41	Poor (50-31)		
Dist 3	SALINASST	SALINAS ST	20	JOHN ST	CLAY ST	A	A	2	336	38	12,768	**18**	01/26/23	21	20-11	Failed (30-0)	10/31/19	SHALLOW PATCH
Dist 3	SANANDREAS	SAN ANDREAS WAY	10	SAN JUAN DR	END	R	A	2	171	32	5,476	**47**	01/19/23	49	50-41	Poor (50-31)	07/16/19	DEEP PATCH
Dist 3	SANANGELOD	SAN ANGELO DR	15	SANTA CRUZ AVE	LA MESA DR	R	A	2	1,918	37	70,966	**20**	01/18/23	22	20-11	Failed (30-0)		
Dist 3	SANANTONIO	SAN ANTONIO CIR	10	ORANGE DR	END	R	A	2	159	32	5,114	**28**	01/23/23	30	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 3	SANANTONI1	SAN ANTONIO DR	10	W ROMIE LN	W ACACIA ST	R	A	2	775	32	24,819	**19**	01/23/23	21	20-11	Failed (30-0)	03/06/19	DEEP PATCH
Dist 2	SANBENITOS	SAN BENITO ST	010	S WOOD ST	S MADEIRA AVE	R	A	2	900	42	37,800	**65**	01/19/23	66	70-61	Fair (70-51)		
Dist 2	SANBENITOS	SAN BENITO ST	020	S MADEIRA AVE	END	R	A	2	398	42	16,716	**16**	01/19/23	18	20-11	Failed (30-0)		
Dist 3	SANBLANCOC	SAN BLANCO CT	10	SAN BLANCO DR	END	R	A	2	246	32	7,883	**47**	01/23/23	49	50-41	Poor (50-31)	05/14/19	SLURRY SEAL
Dist 3	SANBLANCOD	SAN BLANCO DR	25	PICO BLANCO	LAS CRUCES WAY	R	A	2	974	37	36,038	**67**	01/23/23	68	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 3	SANBRUNOWA	SAN BRUNO WAY	15	SAN MATEO DR	SAN ANGELO DR	R	A	2	748	37	27,676	**39**	03/16/23	40	40-31	Poor (50-31)		
Dist 3	SANCARLOSD	SAN CARLOS DR	10	SAN PEDRO ST	SAN MIGUEL AVE	R	A	2	1,259	32	40,307	**56**	01/19/23	57	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	SANCLEMENT	SAN CLEMENTE AVE	15	KIRKWOOD AVE	NACIONAL ST	R	C	2	679	32	21,728	**19**	03/16/23	21	20-11	Failed (30-0)		
Dist 3	SANDIEGODR	SAN DIEGO DR	15	SANTA CRUZ AVE	SAN BRUNO WAY	R	A	2	831	32	26,611	**67**	01/19/23	68	70-61	Fair (70-51)		
Dist 3	SANFELIPEC	SAN FELIPE CT	10	SAN FELIPE ST	END	R	A	2	365	32	11,711	**30**	01/23/23	32	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANFELIPES	SAN FELIPE ST	10	SANTA FE WAY	C.O.P.	R	A	2	300	32	9,600	**76**	01/23/23	77	80-71	Good (90-71)	06/07/19	SHALLOW PATCH
Dist 3	SANFELIPES	SAN FELIPE ST	15	C.O.P.	SIERRA MADRE DR	R	A	2	430	32	13,760	**25**	01/23/23	27	30-21	Failed (30-0)	06/07/19	SHALLOW PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	SANFELIPES	SAN FELIPE ST	20	SIERRA MADRE DR	SAN VINCENTE AVE	R	A	2	1,420	32	45,440	**29**	01/23/23	31	30-21	Failed (30-0)		
Dist 3	SANFERNAND	SAN FERNANDO CIR	10	SAN FERNANDO DR	END	R	A	2	252	32	8,089	**60**	01/19/23	61	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	SANFERNAN1	SAN FERNANDO DR	15	WILGART WAY	LA MESA DR	R	A	2	1,617	32	51,752	**66**	01/19/23	67	70-61	Fair (70-51)		
Dist 3	SANGABRIEL	SAN GABRIEL DR	10	CENTRAL AVE	END	R	A	2	210	38	7,980	**76**	01/25/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	SANJACINTO	SAN JACINTO DR	10	KENTFIELD DR	MONTECITO WAY	R	A	2	1,052	32	33,665	**65**	01/24/23	66	70-61	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 3	SANJOSEST	SAN JOSE ST	010	LOS PALOS DR	WILGART WAY	R	C	2	810	37	29,970	**43**	02/10/23	44	50-41	Poor (50-31)		
Dist 3	SANJOSEST	SAN JOSE ST	020	WILGART WAY	SAN JUAN DR	R	A	2	963	37	35,631	**38**	02/10/23	40	40-31	Poor (50-31)	05/16/19	DEEP PATCH
Dist 3	SANJUANCIR	SAN JUAN CIR	10	SAN JUAN DR	END	R	A	2	202	25	5,050	**48**	01/19/23	50	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 3	SANJUANDR	SAN JUAN DR	10	E BLANCO RD	SAN MIGUEL AVE	R	A	2	1,257	37	46,509	**41**	01/19/23	43	50-41	Poor (50-31)	02/26/19	DEEP PATCH
Dist 3	SANJUANDR	SAN JUAN DR	20	SAN MIGUEL AVE (E)	SAN MIGUEL DR (W)	R	A	2	2,084	32	66,688	**59**	01/19/23	60	60-51	Fair (70-51)		
Dist 5&6	SANJUANGRA	SAN JUAN GRADE RD	050	N MAIN ST	E BORONDA RD	A	A	2	1,640	38	62,320	**48**	02/09/23	50	50-41	Poor (50-31)	04/12/19	SHALLOW PATCH
Dist 5&6	SANJUANGRA	SAN JUAN GRADE RD	060	E BORONDA RD	W/C 400' NE OF NORTHRIDGE WAY	A	A	4	1,030	81	83,430	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 5&6	SANJUANGRA	SAN JUAN GRADE RD	065	W/C 400' NE OF NORTHRIDGE WAY	VAN BUREN AVE	A	A	2	985	38	37,430	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 5&6	SANJUANGRA	SAN JUAN GRADE RD	070	VAN BUREN AVE	RUSSEL RD	A	A	2	2,807	38	106,666	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 3	SANLEANDRO	SAN LEANDRO CIR	10	W ALISAL ST	END	R	A	2	221	32	7,079	**29**	01/24/23	31	30-21	Failed (30-0)	01/01/14	SLURRY SEAL
Dist 3	SANLEANDR1	SAN LEANDRO WAY	10	W ALISAL ST	SANTA FE WAY	R	A	2	292	38	11,096	**31**	01/24/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	SANMARCOSC	SAN MARCOS CT	10	SAN MARCOS DR (N)	SAN MARCOS DR (S)	R	A	2	936	32	29,952	**29**	01/19/23	31	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANMARCOSD	SAN MARCOS DR	15	SANTA CRUZ AVE	LA MESA DR	R	A	2	1,956	37	72,372	**29**	01/18/23	31	30-21	Failed (30-0)		
Dist 3	SANMARINOW	SAN MARINO WAY	10	E ROMIE LN	SANTA CRUZ AVE	R	A	2	473	41	19,393	**19**	01/18/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANMATEODR	SAN MATEO DR	15	SAN MIGUEL AVE	SAN TOMAS WAY	R	A	2	729	37	26,973	**50**	01/19/23	52	50-41	Poor (50-31)	02/07/19	DEEP PATCH
Dist 3	SANMATEOPL	SAN MATEO PL	10	SAN MATEO DR	END	R	A	2	201	32	6,432	**58**	01/19/23	59	60-51	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	SANMIGUELA	SAN MIGUEL AVE	010	S MAIN ST	PAJARO ST	R	O	2	843	56	47,208	**42**	01/19/23	44	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 3	SANMIGUELA	SAN MIGUEL AVE	020	PAJARO ST	ALAMEDA AVE	C	A	2	1,924	32	61,568	**42**	01/19/23	45	50-41	Poor (50-31)	11/12/19	DEEP PATCH
Dist 3	SANMIGUELA	SAN MIGUEL AVE	030	ALAMEDA AVE	SAN FERNANDO DR	C	A	2	739	35	25,865	**61**	01/19/23	63	70-61	Fair (70-51)		
Dist 3	SANMIGUELA	SAN MIGUEL AVE	040	SAN FERNANDO DR	SAN MATEO DR	C	A	2	1,137	38	43,206	**65**	01/19/23	67	70-61	Fair (70-51)	03/26/19	DEEP PATCH
Dist 3	SANMIGUELC	SAN MIGUEL CIR	10	SAN MIGUEL AVE	END	R	A	2	188	26	4,888	**60**	01/19/23	61	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	SANPEDROST	SAN PEDRO ST	10	PAJARO ST	SAN CARLOS DR	R	A	2	1,208	26	31,408	**61**	01/19/23	62	70-61	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	SANRAMONCI	SAN RAMON CIR	10	PAJARO ST	END	R	C	2	197	32	6,329	**57**	01/19/23	58	60-51	Fair (70-51)		
Dist 3	SANSIMEOND	SAN SIMEON DR	15	CAMDEN WAY	AMBROSE DR	R	A	2	1,792	32	57,360	**35**	01/24/23	37	40-31	Poor (50-31)	03/18/19	SHALLOW PATCH
Dist 3	SANTOMASWA	SAN TOMAS WAY	15	SAN MARCOS DR	SAN DIEGO DR	R	A	2	623	32	19,966	**39**	01/19/23	41	40-31	Poor (50-31)		
Dist 3	SANVINCENT	SAN VINCENTE AVE	010	W ALISAL ST	SANTA PAULA DR	C	A	2	1,145	32	36,640	**19**	01/24/23	23	20-11	Failed (30-0)	05/16/19	DEEP PATCH
Dist 3	SANVINCENT	SAN VINCENTE AVE	020	SANTA PAULA DR	W ACACIA ST	C	A	2	567	32	18,144	**14**	01/24/23	18	20-11	Failed (30-0)	05/16/19	DEEP PATCH
Dist 3	SANVINCENT	SAN VINCENTE AVE	030	W ACACIA ST	PALMA DR	C	A	2	924	32	29,568	**57**	01/24/23	59	60-51	Fair (70-51)		
Dist 3	SANVINCENT	SAN VINCENTE AVE	040	PALMA DR	W BLANCO RD	C	A	2	1,311	32	41,952	**52**	01/24/23	55	60-51	Fair (70-51)		
Dist 3	SANVINCEN1	SAN VINCENTE CIR	10	SAN VINCENTE AVE	END	R	A	2	324	37	11,988	**23**	01/23/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANYSIDROW	SAN YSIDRO WAY	10	AMBROSE DR	MONTECITO WAY	R	A	2	629	41	25,789	**46**	01/24/23	48	50-41	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 3	SANBORNPL	SANBORN PL	25	S END	INDUSTRIAL ST	C	A	2	2,355	34	80,070	**31**	01/17/23	35	40-31	Poor (50-31)	08/19/19	DEEP PATCH
Dist 4	SANSOMEST	SANSOME ST	15	RICO ST	W ROSSI ST	R	A	2	1,630	35	57,050	**63**	08/15/23	64	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	SANTAANADR	SANTA ANA DR	10	GROVE ST (N)	GROVE ST (S)	R	A	2	895	32	28,640	**48**	01/24/23	50	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	SANTABARBA	SANTA BARBARA AVE	15	WILSON ST	NATIONAL ST	R	A	2	668	32	21,376	**23**	03/16/23	25	30-21	Failed (30-0)		
Dist 4	SANTACLARA	SANTA CLARA AVE	10	N FREEWAY OFF RAMP	END	R	O	2	369	24	8,856	**77**	03/01/23	78	80-71	Good (90-71)	07/16/21	SLURRY SEAL
Dist 3	SANTACRUZA	SANTA CRUZ AVE	15	SAN ANGELO DR	SAN MARCOS DR	R	A	2	875	37	32,375	**30**	01/18/23	32	30-21	Failed (30-0)	02/07/19	DEEP PATCH
Dist 3	SANTAFEWAY	SANTA FE WAY	15	SANTA MONICA WAY	SAN FELIPE ST	R	A	2	644	38	24,472	**47**	01/24/23	49	50-41	Poor (50-31)	06/06/19	DEEP PATCH
Dist 3	SANTALUCIA	SANTA LUCIA AVE	15	ALAMEDA AVE	CARMEL AVE	R	P	2	917	34	31,178	**62**	01/24/23	63	70-61	Fair (70-51)		
Dist 2	SANTAMARIA	SANTA MARIA ST	15	S WOOD ST	S MADEIRA AVE	R	A	2	899	42	37,758	**63**	01/19/23	64	70-61	Fair (70-51)		
Dist 3	SANTAMONIC	SANTA MONICA CT	10	SANTA MONICA WAY	END	R	A	2	363	35	12,705	**17**	01/24/23	19	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANTAMONI1	SANTA MONICA WAY	15	SIERRA MADRE DR	SANTA FE WAY	R	A	2	816	37	30,192	**22**	01/24/23	24	30-21	Failed (30-0)	02/25/19	DEEP PATCH
Dist 3	SANTAPAULA	SANTA PAULA DR	15	W ALISAL ST	SAN VINCENTE AVE	R	A	2	879	32	28,148	**19**	01/25/23	21	20-11	Failed (30-0)	07/05/19	DEEP PATCH
Dist 5	SANTARITAS	SANTA RITA ST	15	E BOLIVAR ST	SWANER AVE	R	A	2	819	36	29,484	**31**	03/02/23	33	40-31	Poor (50-31)		
Dist 3	SANTAROSAA	SANTA ROSA AVE	10	NACIONAL ST	PARK ST	R	A	2	466	32	14,921	**18**	03/16/23	20	20-11	Failed (30-0)	03/25/19	SHALLOW PATCH
Dist 4	SANTATERES	SANTA TERESA CIR	10	GRANADA AVE	END	R	A	2	180	32	5,760	**26**	02/17/23	28	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 4	SANTATERE1	SANTA TERESA WAY	15	E LAUREL DR	GRANADA AVE	R	A	2	1,619	37	59,903	**63**	02/17/23	64	70-61	Fair (70-51)		
Dist 6	SARATOGACI	SARATOGA CIR	10	SARATOGA DR	END	R	A	2	232	32	7,432	**43**	02/04/23	45	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	SARATOGADR	SARATOGA DR	15	NATIVIDAD RD	END	R	A	2	1,455	41	59,655	**21**	02/04/23	23	30-21	Failed (30-0)	01/16/19	DEEP PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	SARDINADR	SARDINA DR	15	CAPRI WAY	BELLAGIO WAY	R	A	2	907	32	29,024	**88**	08/15/23	89	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	SAUCITOAVE	SAUCITO AVE	10	PESCADERO DR	CAMBRIAN DR	R	A	2	878	32	28,108	**55**	02/04/23	56	60-51	Fair (70-51)	05/28/19	DEEP PATCH
Dist 6	SAUSALDR	SAUSAL DR	10	PESCADERO DR	CAMBRIAN DR	R	A	2	719	32	23,018	**20**	02/04/23	22	20-11	Failed (30-0)	07/29/19	DEEP PATCH
Dist 3	SCHILLINGP	SCHILLING PL	15	HANSEN ST	END	R	A	2	2,543	32	81,407	**55**	01/17/23	56	60-51	Fair (70-51)		
Dist 2	SCONBERGPK	SCONBERG PKWY	10	ALISAL RD	MONTE BELLA BLVD	C	A	2	875	32	28,000	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	SCONBERGPK	SCONBERG PKWY	20	MONTE BELLA BLVD	PAVIA WAY	C	A	2	1,769	32	56,608	**93**	02/10/23	95	100-91	Excellent (100-91)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	SCONBERGPK	SCONBERG PKWY	30	PAVIA WAY	FREEDOM PKWY	C	A	2	920	32	29,440	**93**	02/10/23	95	100-91	Excellent (100-91)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 5	SEGOVIACIR	SEGOVIA CIR	10	MADRID ST	END	R	A	2	287	32	9,210	**43**	02/10/23	45	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 5	SEMINOLEWA	SEMINOLE WAY	10	SHAWNEE WAY	CHEROKEE DR	R	A	2	926	32	29,656	**19**	02/16/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	SENECAPL	SENECA PL	10	CHEROKEE DR	END	R	A	2	367	32	11,744	**19**	02/16/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	SEPULVEDAC	SEPULVEDA CIR	10	SEPULVEDA DR	END	R	A	2	325	32	10,400	**43**	02/17/23	45	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 5	SEPULVEDAD	SEPULVEDA DR	15	N 1ST ST	W ALVIN DR	R	A	2	1,518	32	48,595	**26**	02/17/23	28	30-21	Failed (30-0)		
Dist 4	SEQUOIAST	SEQUOIA ST	10	LINWOOD DR	MARYAL DR	R	A	2	1,093	32	34,999	**27**	02/17/23	29	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	SEVILLEST	SEVILLE ST	15	DURAN ST	CHEROKEE DR	R	A	2	1,255	32	40,160	**30**	02/10/23	32	30-21	Failed (30-0)		
Dist 5	SEVILLEWAY	SEVILLE WAY	10	CHEROKEE DR	SEVILLE ST	R	A	2	177	32	5,664	**24**	02/10/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	SHARONDR	SHARON DR	15	END	BARBARA PL	R	A	2	1,271	32	40,685	**25**	01/18/23	27	30-21	Failed (30-0)	07/08/19	DEEP PATCH
Dist 2	SHASTAWAY	SHASTA WAY	10	GARDEN WAY	JOHN ST	R	A	2	792	32	25,351	**32**	01/19/23	34	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 5	SHAWNEEWAY	SHAWNEE WAY	15	SEMINOLE WAY	INCA WAY	R	A	2	516	32	16,540	**22**	02/16/23	24	30-21	Failed (30-0)	07/24/20	SKIN PATCH
Dist 3	SHELLEYWAY	SHELLEY WAY	10	KIPLING ST	KIPLING ST	R	A	2	863	32	27,628	**58**	01/23/23	59	60-51	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 5	SHERMANCIR	SHERMAN CIR	10	SHERMAN DR	END	R	A	2	260	32	8,320	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	SHERMANDR	SHERMAN DR	15	LARKIN ST	END	R	A	2	1,727	37	63,899	**80**	08/15/23	80	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	SHERWOODDR	SHERWOOD DR	025	E ROSSI ST	E MARKET ST	A	A	4	704	64	45,068	**56**	01/20/23	58	60-51	Fair (70-51)		
Dist 4	SHERWOODDR	SHERWOOD DR	030	E ROSSI ST	101 Overpass (PCC START)	A	A	4	1,649	64	105,536	**55**	01/20/23	57	60-51	Fair (70-51)		
Dist 4	SHERWOODDR	SHERWOOD DR	040	101 Overpass (PCC END)	185 Ft S/O SHERWOOD PL	A	A	4	850	57	48,450	**65**	01/20/23	67	70-61	Fair (70-51)		
Dist 4	SHERWOODDR	SHERWOOD DR	050	E BERNAL DR EB	185 Ft S/O SHERWOOD PL (PCC EN	A	P	4	1,814	57	103,398	**74**	02/10/23	75	80-71	Good (90-71)		
Dist 4	SHERWOODDR	SHERWOOD DR	060	NATIVIDAD RD	E BERNAL DR	A	P	4	278	64	17,828	**75**	02/10/23	76	80-71	Good (90-71)		
Dist 4	SHERWOODPL	SHERWOOD PL	10	SHERWOOD DR	END	R	A	2	766	38	29,145	**24**	01/20/23	26	30-21	Failed (30-0)	03/05/19	DEEP PATCH
Dist 4	SHIRESWAY	SHIRES WAY	10	BLOCK AVE	RAINIER DR	R	A	2	475	37	17,609	**24**	02/09/23	26	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 4	SHORTST	SHORT ST	10	E MARKET ST	N FILICE ST	R	A	2	436	32	13,978	**50**	03/13/23	51	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 1	SIEBERST	SIEBER ST	15	PACIFIC AVE	GARNER AVE	R	A	2	814	22	17,908	**45**	02/02/23	47	50-41	Poor (50-31)		
Dist 2	SIENAWAY	SIENA WAY	15	PIAZZA DR	END	R	A	2	812	37	30,044	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	SIERRADR	SIERRA DR	15	GROVE ST	MANOR DR	R	A	2	1,561	32	49,977	**38**	01/24/23	40	40-31	Poor (50-31)		
Dist 3	SIERRAMADR	SIERRA MADRE DR	15	SANTA MONICA WAY	SANTA PAULA DR	R	A	2	2,719	32	87,028	**24**	01/24/23	26	30-21	Failed (30-0)	04/11/19	DEEP PATCH
Dist 2	SILVERADOC	SILVERADO CIR	10	DEL MONTE AVE	END	R	A	2	185	32	5,950	**56**	03/15/23	57	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 2	SILVERWOOD	SILVERWOOD PL	10	DEL MONTE AVE	END	R	A	2	410	32	13,123	**56**	03/15/23	57	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 4	SIMASST	SIMAS ST	15	E MARKET ST	END	R	A	2	732	38	27,834	**42**	03/17/23	43	50-41	Poor (50-31)	01/14/19	DEEP PATCH
Dist 6	SISKIYOUDR	SISKIYOU DR	10	CALAVERAS DR	KLAMATH DR	R	A	2	1,394	32	44,608	**39**	02/08/23	41	40-31	Poor (50-31)		
Dist 6	SISKIYOUDR	SISKIYOU DR	20	KLAMATH DR	LOS COCHES AVE	R	A	2	739	32	23,651	**73**	02/08/23	74	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 2	SKYPL	SKY PL	10	ALMA AVE	END	R	A	2	245	32	7,855	**18**	03/13/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	SKYWAYBLVD	SKYWAY BLVD	010	E ALISAL ST	AIRPORT BLVD	C	A	4	2,339	62	145,018	**29**	01/17/23	33	30-21	Failed (30-0)	03/21/19	SHALLOW PATCH
Dist 2	SKYWAYBLVD	SKYWAY BLVD	020	AIRPORT BLVD	MORTENSEN AVE	R	A	2	623	36	22,428	**23**	01/17/23	25	30-21	Failed (30-0)	03/21/19	SHALLOW PATCH
Dist 5	SLOATCIR	SLOAT CIR	10	SLOAT DR	END	R	A	2	350	32	11,200	**66**	03/02/23	67	70-61	Fair (70-51)	05/13/19	SLURRY SEAL
Dist 4&5	SLOATDR	SLOAT DR	10	N DAVIS RD	POTRERO WAY	R	A	2	810	37	29,970	**66**	03/02/23	67	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 5	SLOATDR	SLOAT DR	20	POTRERO WAY	COLTON DR	R	A	2	826	37	30,562	**62**	03/02/23	63	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 2	SMITHST	SMITH ST	15	JAMES ST	E ALISAL ST	R	A	2	911	24	21,864	**65**	01/19/23	66	70-61	Fair (70-51)		
Dist 6	SNUGHARBOR	SNUG HARBOR ST	15	KITTERY ST	END	R	A	2	1,469	32	47,024	**64**	02/02/23	65	70-61	Fair (70-51)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	SOLANOWAY	SOLANO WAY	10	E ALVIN DR	MENDOCINO DR	R	A	2	245	37	9,065	**65**	02/17/23	66	70-61	Fair (70-51)		
Dist 6	SOLANOWAY	SOLANO WAY	20	MENDOCINO DR	END	R	A	2	285	32	9,120	**27**	02/17/23	29	30-21	Failed (30-0)		
Dist 3	SOLEDADST	SOLEDAD ST	010	JOHN ST	W GABILAN ST	R	A	2	2,140	32	68,480	**32**	03/17/23	34	40-31	Poor (50-31)		
Dist 3	SOLEDADST	SOLEDAD ST	020	E GABILAN ST	N END	R	P	2	270	34	9,180	**28**	03/17/23	29	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 4	SOLEDADST	SOLEDAD ST	110	E LAKE ST	E GABILAN ST	R	A	2	678	32	21,719	**47**	02/19/21	52	50-41	Poor (50-31)	02/19/21	SKIN PATCH
Dist 6	SOMERSWORT	SOMERSWORTH CIR	10	SOMERSWORTH WAY	END	R	A	2	368	32	11,791	**78**	02/02/23	79	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 6	SOMERSWOR1	SOMERSWORTH WAY	10	CABOT WAY	BOSTON ST	R	A	2	758	32	24,281	**79**	02/02/23	80	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 4	SONORAWAY	SONORA WAY	10	CHAPARRAL ST	TAMPICO AVE	R	A	2	1,078	32	34,509	**41**	02/09/23	43	50-41	Poor (50-31)	03/20/19	DEEP PATCH
Dist 4	SORRENTINI	SORRENTINI DR	15	GRANADA AVE	NATIVIDAD RD	R	A	2	541	32	17,330	**32**	02/17/23	34	40-31	Poor (50-31)		
Dist 5	SOTOPL	SOTO PL	15	E BOLIVAR ST	S END	R	A	2	145	32	4,640	**41**	03/02/23	43	50-41	Poor (50-31)		
Dist 5	SOUZAWAY	SOUZA WAY	10	HOOVER ST	LENNY ST	R	A	2	738	32	23,638	**33**	03/02/23	35	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	SPICERST	SPICER ST	10	BRUNKEN AVE	ABBOTT ST	R	A	2	667	42	28,014	**41**	01/18/23	43	50-41	Poor (50-31)	01/01/02	CAPE SEAL
Dist 2	SPOLETOCIR	SPOLETO CIR	10	SPOLETO WAY	END	R	A	2	378	32	12,126	**88**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	SPOLETOST	SPOLETO ST	15	CASSINO WAY	END	R	A	2	1,254	33	41,382	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	SPOLETOWAY	SPOLETO WAY	10	CANELLI CT	SPOLETO CIR	R	A	2	234	33	7,722	**88**	08/15/23	89	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	SPRINGST	SPRING ST	15	JOHN ST	SUMMER ST	R	C	2	500	30	15,000	**37**	01/18/23	39	40-31	Poor (50-31)		
Dist 4	STALBANSCI	ST ALBANS CIR	10	ST ALBANS WAY	END	R	A	2	130	39	5,070	**39**	03/03/23	41	40-31	Poor (50-31)	01/01/08	CAPE SEAL
Dist 4	STALBANSCT	ST ALBANS CT	15	ST EDWARDS AVE	CIRCLE DR	R	A	2	855	37	31,660	**61**	03/03/23	62	70-61	Fair (70-51)		
Dist 4	STALBANSWA	ST ALBANS WAY	10	CIRCLE DR	ST ALBANS CT	R	A	2	576	32	18,463	**67**	03/03/23	68	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 3	STANDREWCT	ST ANDREW CT	10	PALMA DR (W)	PALMA DR (E)	R	A	2	925	32	29,600	**24**	01/24/23	26	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 3	STANNDR	ST ANN DR	10	BELMONT DR	ARCHER ST	R	A	2	1,256	32	40,214	**18**	03/16/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	STAUGUSTIN	ST AUGUSTINE DR	10	ST REGIS WAY	ST CHARLES WAY	R	A	2	1,632	32	52,247	**64**	03/03/23	65	70-61	Fair (70-51)	01/01/08	CAPE SEAL
Dist 4	STBRENDANW	ST BRENDAN WAY	10	ST FRANCIS WAY	ROSARITA DR	R	A	2	1,374	32	43,996	**23**	02/17/23	25	30-21	Failed (30-0)	04/03/19	DEEP PATCH
Dist 4	STCHARLESP	ST CHARLES PL	10	ST CHARLES WAY	END	R	A	2	187	32	5,984	**62**	03/03/23	63	70-61	Fair (70-51)	01/01/08	CAPE SEAL
Dist 4	STCHARLESW	ST CHARLES WAY	10	N MADEIRA AVE	ST CHARLES PL	R	A	2	730	32	23,390	**56**	03/03/23	57	60-51	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 4	STCHARLESW	ST CHARLES WAY	25	ST CHARLES PL	ST EDWARDS AVE	R	A	2	518	32	16,581	**34**	03/03/23	36	40-31	Poor (50-31)		
Dist 4	STEDWARDSA	ST EDWARDS AVE	15	E LAUREL DR	CIRCLE DR	C	A	2	2,688	42	112,930	**61**	03/03/23	63	70-61	Fair (70-51)	04/25/19	SLURRY SEAL
Dist 4	STFRANCISW	ST FRANCIS WAY	15	SORRENTINI DR	ROSARITA DR	R	A	2	1,714	32	54,859	**44**	02/17/23	46	50-41	Poor (50-31)		
Dist 4	STGEORGECI	ST GEORGE CIR	10	ST GEORGE DR	END	R	A	2	200	32	6,400	**48**	03/03/23	49	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 4	STGEORGEDR	ST GEORGE DR	15	N MADEIRA AVE	ST REGIS WAY	R	A	2	1,342	32	42,944	**58**	03/03/23	59	60-51	Fair (70-51)		
Dist 4	STHELENWAY	ST HELEN WAY	10	CIRCLE DR	N MADEIRA AVE	R	A	2	1,619	32	51,808	**29**	03/03/23	31	30-21	Failed (30-0)	02/27/19	DEEP PATCH
Dist 2	STJOSEPHCI	ST JOSEPH CIR	10	1ST AVE	END	R	A	2	280	32	8,960	**39**	03/13/23	40	40-31	Poor (50-31)	03/12/19	SHALLOW PATCH
Dist 4	STMICHAELP	ST MICHAEL PL	10	ST MICHAEL WAY	END	R	A	2	176	32	5,651	**49**	03/03/23	50	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 4	STMICHAELW	ST MICHAEL WAY	10	CIRCLE DR	N MADEIRA AVE	R	A	2	1,046	32	33,482	**56**	03/03/23	57	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 4	STREGISCIR	ST REGIS CIR	10	ST REGIS WAY	END	R	A	2	225	32	7,200	**54**	03/03/23	55	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 4	STREGISWAY	ST REGIS WAY	15	ST GEORGE DR	N END	R	A	2	810	32	25,920	**52**	03/03/23	53	60-51	Fair (70-51)		
Dist 4	STTHOMASWA	ST THOMAS WAY	10	ST GEORGE DR	ST EDWARDS AVE	R	A	2	297	32	9,518	**47**	03/03/23	48	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 3	STANFORDAV	STANFORD AVE	10	HASTINGS AVE	LEMOS AVE	R	A	2	678	32	21,708	**17**	01/25/23	19	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	STANYANST	STANYAN ST	10	GREENWICH WAY	SANSOME ST	R	A	2	680	32	21,760	**80**	08/15/23	80	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	STATIONPL	STATION PL	10	W MARKET ST	RAILROAD AVE	NCR	C	2	361	56	20,216	**90**	03/17/23	91	90-81	Good (90-71)		
Dist 3	STEPHANIED	STEPHANIE DR	10	S MAIN ST	STEPHANIE DR	R	A	2	860	41	35,260	**32**	01/23/23	34	40-31	Poor (50-31)	02/28/19	DEEP PATCH
Dist 3	STEPHANIED	STEPHANIE DR	20	STEPHANIE DR	C.O.P.	R	A	2	500	35	17,500	**64**	01/23/23	65	70-61	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	STEPHANIED	STEPHANIE DR	30	C.O.P.	BYRON DR	R	A	2	130	35	4,550	**24**	01/23/23	26	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	STEVENSONS	STEVENSON ST	10	MCALLISTER ST	BRIGHTON ST	R	A	2	542	31	16,802	**24**	03/02/23	26	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 4	STOCKTONST	STOCKTON ST	15	POWELL ST	W ROSSI ST	R	A	2	1,245	34	42,330	**76**	08/15/23	76	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	STOKESWAY	STOKES WAY	10	LARKIN ST	COLTON DR	R	A	2	291	37	10,767	**36**	03/01/23	38	40-31	Poor (50-31)	05/13/19	SLURRY SEAL
Dist 3	STONEST	STONE ST	10	W MARKET ST	CENTRAL AVE	R	C	2	788	32	25,216	**38**	03/15/23	39	40-31	Poor (50-31)		
Dist 6	STONYBROOK	STONY BROOK CIR	10	STONY BROOK DR	END	R	A	2	316	32	10,114	**72**	02/03/23	73	80-71	Good (90-71)		
Dist 6	STONYBROO1	STONY BROOK DR	10	LITTLE RIVER DR	STONY BROOK CIR	R	A	2	905	38	34,390	**75**	02/03/23	76	80-71	Good (90-71)		
Dist 6	STONYBROO1	STONY BROOK DR	20	STONY BROOK CIR	CASTLETON ST	R	A	2	779	38	29,602	**74**	02/03/23	75	80-71	Good (90-71)		
Dist 6	STRATFORDC	STRATFORD CT	10	EMERALD DR N. SIDE	EMERALD DR S. SIDE	R	A	2	1,037	32	33,184	**82**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	SUCRECT	SUCRE CT	15	E LAMAR ST (W)	E LAMAR ST (E)	R	A	2	675	25	16,875	**21**	03/02/23	23	30-21	Failed (30-0)	03/07/19	DEEP PATCH
Dist 6	SUFFIELDCI	SUFFIELD CIR	10	HANCOCK ST	END	R	A	2	294	31	9,114	**69**	02/03/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 1	SUMACWAY	SUMAC WAY	10	SAGE CT	CHAMISE DR	R	A	2	483	37	17,871	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	SUMMERST	SUMMER ST	25	FRONT ST	END	R	A	2	751	37	27,787	**31**	01/18/23	33	40-31	Poor (50-31)		
Dist 4	SUMMITDR	SUMMIT DR	15	HILL TOP DR (W)	HILL TOP DR (E)	R	A	2	1,187	32	37,984	**28**	03/03/23	30	30-21	Failed (30-0)	08/05/19	DEEP PATCH
Dist 4	SUNST	SUN ST	10	END	CALLE CEBU	R	A	2	590	39	23,010	**25**	01/26/23	27	30-21	Failed (30-0)	01/14/19	DEEP PATCH
Dist 4	SUNST	SUN ST	20	CALLE CEBU	E MARKET ST	R	A	2	683	32	21,856	**10**	01/26/23	13	10-0	Failed (30-0)	08/07/19	DEEP PATCH
Dist 4	SUNST	SUN ST	30	E MARKET ST	COMMISSION ST	R	A	2	271	32	8,696	**20**	01/26/23	22	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	SUNST	SUN ST	40	COMMISSION ST	END	R	A	2	454	41	18,625	**19**	01/26/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	SUNRISEST	SUNRISE ST	10	GARNER AVE	DEL MONTE AVE	R	A	2	1,547	32	49,514	**49**	02/03/23	51	50-41	Poor (50-31)	07/24/20	SKIN PATCH
Dist 2	SURREYWAY	SURREY WAY	10	COUNTRYSIDE DR	ANDINA DR	R	A	2	963	32	30,825	**68**	03/15/23	69	70-61	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 4	SUTROCIR	SUTRO CIR	10	SLOAT DR	END	R	A	2	245	32	7,846	**77**	03/02/23	78	80-71	Good (90-71)	05/10/19	SLURRY SEAL
Dist 6	SUTTERST	SUTTER ST	10	MARIN AVE	VENTURA WAY	R	A	2	1,306	37	48,322	**21**	02/09/23	23	30-21	Failed (30-0)		
Dist 6	SUTTONCIR	SUTTON CIR	10	SUTTON WAY	END	R	A	2	190	31	5,890	**76**	08/15/23	77	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	SUTTONWAY	SUTTON WAY	15	DELANCEY DR (W)	DELANCEY DR (N)	R	A	2	916	33	30,228	**77**	08/15/23	78	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	SWANERAVE	SWANER AVE	15	SANTA RITA ST	VAN BUREN AVE	R	A	2	2,126	38	80,788	**44**	03/02/23	45	50-41	Poor (50-31)	03/22/21	SKIN PATCH
Dist 5	SWANERCIR	SWANER CIR	10	SWANER AVE	END	R	A	2	195	28	5,460	**46**	03/02/23	48	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 2	SYCAMORERD	SYCAMORE RD	15	PALOMA AVE	BARDIN RD	R	A	2	2,184	34	74,256	**54**	03/13/23	55	60-51	Fair (70-51)		
Dist 5	TAFTCIR	TAFT CIR	10	VAN BUREN AVE	END	R	A	2	240	27	6,480	**23**	03/02/23	25	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 1	TAHITIPL	TAHITI PL	10	CARIBBEAN AVE	END	R	A	2	407	25	10,175	**41**	02/02/23	43	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 6	TAHOECIR	TAHOE CIR	10	TAHOE DR	END	R	A	2	151	32	4,855	**28**	02/08/23	30	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 6	TAHOEDR	TAHOE DR	15	LOS COCHES AVE	END	R	A	2	1,498	35	52,430	**38**	02/08/23	40	40-31	Poor (50-31)		
Dist 3	TALBOTST	TALBOT ST	15	HOMESTEAD AVE	SAN VINCENTE AVE	R	A	2	949	32	30,368	**33**	01/25/23	35	40-31	Poor (50-31)	03/20/19	DEEP PATCH
Dist 1	TAMARAKWAY	TAMARAK WAY	10	CHAMISE DR	BUCKHORN DR	R	A	2	494	32	15,828	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 2	TAMPAST	TAMPA ST	15	TORO AVE	E ALISAL ST	R	A	2	767	35	26,845	**27**	03/13/23	29	30-21	Failed (30-0)		
Dist 4	TAMPICOAVE	TAMPICO AVE	80	VALLEJO ST	ELWOOD ST	R	A	2	489	32	15,648	**61**	02/09/23	62	70-61	Fair (70-51)	09/16/19	DEEP PATCH
Dist 4	TAMPICOAVE	TAMPICO AVE	90	ELWOOD ST	RAINIER DR	R	A	2	1,261	32	40,352	**42**	02/09/23	44	50-41	Poor (50-31)	03/11/19	DEEP PATCH
Dist 6	TAMPICOAVE	TAMPICO AVE	100	RAINIER DR	END	R	A	2	461	32	14,776	**77**	02/09/23	78	80-71	Good (90-71)	01/01/01	SLURRY SEAL
Dist 4	TAPADERODR	TAPADERO DR	15	E LAUREL DR	CHAPARRAL ST	R	A	2	1,835	32	58,730	**34**	02/17/23	36	40-31	Poor (50-31)	09/16/19	DEEP PATCH
Dist 4	TARPCIR	TARP CIR	10	SIMAS ST	END	R	A	2	339	37	12,543	**19**	03/17/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	TAYLORST	TAYLOR ST	10	VAN BUREN AVE	COOLIDGE ST	R	A	2	502	32	16,071	**51**	03/02/23	52	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 3	TEAKWOODPL	TEAKWOOD PL	10	WOODSIDE DR	END	R	A	2	408	32	13,072	**32**	01/23/23	34	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 1	TECOPAWAY	TECOPA WAY	10	GAVIOTA DR	TORONA WAY	R	A	2	748	33	24,684	**79**	02/03/23	80	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	TEHAMACIR	TEHAMA CIR	10	RAINIER DR	END	R	A	2	414	32	13,251	**67**	02/09/23	68	70-61	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 4	TERRADR	TERRA DR	10	E LAUREL DR	DORORO DR	R	A	2	751	32	24,034	**28**	02/09/23	30	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 4	TERRACEST	TERRACE ST	15	N MADEIRA AVE	FREMONT ST	R	A	2	1,625	32	52,000	**46**	03/13/23	47	50-41	Poor (50-31)		
Dist 3	TERVENAVE	TERVEN AVE	15	S SANBORN RD	AIRPORT BLVD	C	A	2	2,100	42	88,200	**49**	01/17/23	52	50-41	Poor (50-31)	02/20/19	DEEP PATCH
Dist 6	TETONAVE	TETON AVE	10	RAINIER DR	GLACIER DR	R	A	2	995	32	31,859	**46**	02/09/23	48	50-41	Poor (50-31)	01/07/19	DEEP PATCH
Dist 4	TIPPL	TIP PL	10	TOP PL	END	R	A	2	202	32	6,466	**21**	03/03/23	23	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 6	TOKAYCIR	TOKAY CIR	10	CABERNET WAY	END	R	A	2	130	31	4,030	**68**	03/01/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 4	TOPPL	TOP PL	15	CEDAR ST	END	R	A	2	422	26	10,972	**16**	03/03/23	18	20-11	Failed (30-0)		
Dist 2	TOROAVE	TORO AVE	15	BARDIN RD	E MARKET ST	R	A	2	2,903	35	101,605	**50**	03/15/23	51	50-41	Poor (50-31)	09/30/19	DEEP PATCH
Dist 1	TORONAWAY	TORONA WAY	15	GAVIOTA DR	FREEDOM PKWY	C	A	2	400	38	15,200	**79**	02/03/23	80	80-71	Good (90-71)		
Dist 1	TOWTST	TOWT ST	010	FREEDOM PARKWAY	MAE AVE	C	A	2	1,798	41	73,718	**52**	02/03/23	54	60-51	Fair (70-51)		
Dist 1	TOWTST	TOWT ST	020	MAE AVE	DEL MONTE AVE	C	A	2	1,000	32	32,000	**13**	02/03/23	17	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 2	TOWTST	TOWT ST	030	DEL MONTE AVE	CORTEZ ST	C	A	2	768	36	27,648	**11**	02/03/23	15	20-11	Failed (30-0)	03/20/19	DEEP PATCH
Dist 2	TOWTST	TOWT ST	040	CORTEZ ST	GARNER AVE	C	A	2	787	36	28,332	**28**	02/03/23	32	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 2	TOWTST	TOWT ST	050	GARNER AVE	E LAUREL DR	C	A	2	2,085	52	108,420	**71**	02/03/23	73	80-71	Good (90-71)	05/01/19	DEEP PATCH
Dist 2&4	TOWTST	TOWT ST	060	E LAUREL DR	E MARKET ST	C	A	2	1,497	42	62,874	**22**	02/08/23	26	30-21	Failed (30-0)	06/17/19	DEEP PATCH
Dist 2&4	TOWTST	TOWT ST	070	E MARKET ST	E ALISAL ST	C	A	2	1,608	38	61,104	**77**	02/08/23	78	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 4	TOYONAVE	TOYON AVE	10	REATA ST	TAPADERO DR	R	A	2	725	38	27,564	**43**	02/09/23	45	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 4	TRAZADOAVE	TRAZADO AVE	15	TAMPICO AVE	CHAPARRAL ST	R	A	2	1,354	32	43,342	**27**	02/17/23	29	30-21	Failed (30-0)	12/23/20	SKIN PATCH
Dist 6	TRINITYWAY	TRINITY WAY	15	E ALVIN DR	END	R	A	2	895	32	28,668	**24**	02/09/23	26	30-21	Failed (30-0)		
Dist 2	TRIVOLIWAY	TRIVOLI WAY	10	CAMPANIA WAY	MONTE BELLA BLVD	R	A	2	752	33	24,816	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	TRUCKEEWAY	TRUCKEE WAY	10	DONNER WAY	HUMBOLDT DR	R	A	2	1,180	32	37,774	**30**	02/08/23	32	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 5	TRUMANST	TRUMAN ST	15	EISENHOWER ST	ARTHUR ST	R	A	2	546	38	20,748	**50**	03/02/23	51	50-41	Poor (50-31)		
Dist 6	TUDORWAY	TUDOR WAY	10	VICTORIA AVE	S END	R	A	2	420	33	13,860	**70**	02/08/23	71	70-61	Fair (70-51)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	TUDORWAY	TUDOR WAY	20	LENNOX WAY	TUDOR WAY	R	A	2	860	33	28,380	**69**	02/08/23	70	70-61	Fair (70-51)		
Dist 5	TULANEST	TULANE ST	15	ROCHEX AVE	CHEROKEE DR	R	A	2	1,404	34	47,736	**29**	02/16/23	31	30-21	Failed (30-0)	02/06/19	DEEP PATCH
Dist 2	TULIPCIR	TULIP CIR	10	JOHN ST	END	R	A	2	387	32	12,393	**22**	01/19/23	24	30-21	Failed (30-0)	10/19/20	SKIN PATCH
Dist 1	TUMBLEWEED	TUMBLEWEED DR	15	RIDER AVE	MESQUITE DR	R	A	2	1,284	37	47,508	**79**	02/01/23	80	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 2	TUSCANYBLV	TUSCANY BLVD	15	MONTE BELLA BLVD	FREEDOM PKWY	R	A	2	1,428	42	59,976	**77**	03/15/23	78	80-71	Good (90-71)		
Dist 2	TUSCANYCIR	TUSCANY CIR	10	TUSCANY WAY	END	R	A	2	200	32	6,400	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	TUSCANYWAY	TUSCANY WAY	15	CASSINO WAY	TUSCANY BLVD	R	A	2	316	34	10,744	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	TWAINCIR	TWAIN CIR	10	LONGFELLOW DR	END	R	A	2	264	32	8,478	**56**	02/02/23	57	60-51	Fair (70-51)	01/01/00	REJUVENATION OIL
Dist 1	TWNCRKCIR	TWIN CREEKS CIR	10	TWIN CREEKS DR	END	R	A	2	420	34	14,280	**78**	02/02/23	79	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 1	TWNCRKDR	TWIN CREEKS DR	15	NE END	COP @ SHOPPING CENTER	R	A	2	680	34	23,120	**76**	02/02/23	77	80-71	Good (90-71)		
Dist 1	TWNCRKWY	TWIN CREEKS WAY	10	TWIN CREEKS DR	BEACON HILL DR	R	A	2	177	33	5,841	**80**	02/02/23	81	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 5	TYLERPL	TYLER PL	10	TYLER ST	END	R	A	2	137	32	4,407	**33**	10/21/20	41	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5	TYLERST	TYLER ST	15	N 4TH ST	W LAUREL DR	R	A	2	1,429	31	44,299	**20**	02/17/23	22	20-11	Failed (30-0)	08/05/19	DEEP PATCH
Dist 5	TYLERST	TYLER ST	25	W LAUREL DR	IRIS DR	C	A	2	1,806	32	57,792	**27**	02/17/23	30	30-21	Failed (30-0)	08/05/19	DEEP PATCH
Dist 5	TYLERST	TYLER ST	35	IRIS DR	S END	R	A	2	417	32	13,344	**20**	02/17/23	22	20-11	Failed (30-0)	11/12/19	DEEP PATCH
Dist 6	TYNANWAY	TYNAN WAY	10	WESTMINSTER DR	PLACER WAY	R	A	2	770	32	24,668	**76**	02/17/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	UKIAHWAY	UKIAH WAY	10	SISKIYOU DR	CALAVERAS DR	R	A	2	666	32	21,315	**30**	02/08/23	32	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	UNIVERSITY	UNIVERSITY AVE	10	AMBROSE DR	W ACACIA ST	R	A	2	1,555	37	57,535	**69**	01/25/23	70	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 3	UNIVERSITY	UNIVERSITY AVE	20	W ACACIA ST	CENTRAL AVE	R	A	2	1,751	37	64,787	**67**	01/25/23	68	70-61	Fair (70-51)	05/06/19	SHALLOW PATCH
Dist 3	UNIVERSITY	UNIVERSITY AVE	30	CENTRAL AVE	ARCHER ST	R	A	2	263	40	10,520	**55**	01/25/23	56	60-51	Fair (70-51)	05/06/19	SHALLOW PATCH
Dist 5	VALDEZCIR	VALDEZ CIR	10	QUINTERO CIR	END	R	A	2	387	32	12,384	**32**	02/10/23	34	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	VALEST	VALE ST	10	W MARKET ST	END	R	A	2	234	47	10,998	**7**	03/15/23	9	10-0	Failed (30-0)		
Dist 4	VALENCIAST	VALENCIA ST	10	OREGON ST	KENTUCKY ST	R	A	2	610	36	21,960	**29**	03/03/23	31	30-21	Failed (30-0)	01/01/07	CAPE SEAL
Dist 4	VALLEJOST	VALLEJO ST	10	TAMPICO AVE	LINWOOD DR	R	A	2	1,003	32	32,096	**62**	02/17/23	63	70-61	Fair (70-51)	01/01/01	CAPE SEAL
Dist 4	VALLEJOST	VALLEJO ST	20	TAMPICO AVE	GRANADA AVE	R	A	2	177	32	5,679	**69**	02/17/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 5	VANBURENAV	VAN BUREN AVE	010	SAN JUAN GRADE RD	E BOLIVAR ST	C	A	2	1,491	37	55,167	**71**	08/31/23	71	80-71	Good (90-71)	08/31/23	SHALLOW PATCH
Dist 5	VANBURENAV	VAN BUREN AVE	020	E BOLIVAR ST	EISENHOWER ST	C	A	2	1,023	38	38,874	**66**	08/15/23	67	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	VANBURENAV	VAN BUREN AVE	030	EISENHOWER ST	RUSSEL RD	C	A	2	1,255	42	52,710	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	VANNESSCIR	VAN NESS CIR	10	VAN NESS CT	END	R	A	2	180	32	5,760	**73**	02/09/23	74	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 4&5	VANNESSCT	VAN NESS CT	10	VICTOR ST (W)	HYDE ST	R	A	2	717	37	26,529	**50**	02/09/23	52	50-41	Poor (50-31)		
Dist 5	VANNESSCT	VAN NESS CT	20	VICTOR ST (E)	HYDE ST	R	A	2	705	38	26,790	**69**	02/09/23	70	70-61	Fair (70-51)		
Dist 2	VANDENBERG	VANDENBERG ST	10	LA GUARDIA ST	MOFFETT ST	R	A	2	699	41	28,659	**75**	01/17/23	76	80-71	Good (90-71)	01/01/11	SLURRY SEAL
Dist 3	VASSARAVE	VASSAR AVE	10	HASTINGS AVE	LEMOS AVE	R	A	2	680	32	21,783	**37**	01/25/23	39	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 2	VENICECIR	VENICE CIRCLE	10	ROSSANO WAY	END	R	A	2	287	32	9,184	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	VENICEWAY	VENICE WAY	20	ROSSANO WAY	PAVIA WAY	R	A	2	475	32	15,200	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 6	VENTURAWAY	VENTURA WAY	10	NAPA WAY	SUTTER ST	R	A	2	602	32	19,266	**37**	02/09/23	39	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 1	VERACRUZCI	VERA CRUZ CIR	10	ANTIGUA AVE	END	R	A	2	183	34	6,222	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	VERMONTCIR	VERMONT CIR	10	MASSACHUSETTS DR	END	R	A	2	390	33	12,870	**77**	02/01/23	78	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 2	VERONACT	VERONA CT	15	VERONA WAY	PIAZZA DR	R	A	2	1,978	35	69,230	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	VERONAWAY	VERONA WAY	15	MONTE BELLA BLVD	VERONA CT (W)	R	A	2	387	38	14,706	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	VERTINAVE	VERTIN AVE	010	INDUSTRIAL ST	TERVEN AVE	R	A	2	1,636	42	68,712	**47**	01/17/23	49	50-41	Poor (50-31)		
Dist 3	VERTINAVE	VERTIN AVE	020	TERVEN AVE	END	R	A	2	510	42	21,420	**28**	01/17/23	30	30-21	Failed (30-0)	01/01/02	CAPE SEAL
Dist 3	VIAMARIA	VIA MARIA	15	END	ARCHER ST	R	A	2	1,531	32	49,015	**50**	03/16/23	51	50-41	Poor (50-31)	03/13/19	DEEP PATCH
Dist 3	VIAPARAISO	VIA PARAISO	25	LOS PALOS DR	LA MESA DR	R	A	2	1,626	32	52,052	**16**	01/19/23	19	20-11	Failed (30-0)	06/25/21	SKIN PATCH
Dist 5	VICTORCIR	VICTOR CIR	10	VICTOR ST	END	R	A	2	330	32	10,560	**50**	03/02/23	51	50-41	Poor (50-31)	05/14/19	SLURRY SEAL
Dist 3	VICTORST	VICTOR ST	010	VICTOR WY	W ROSSI ST	R	A	2	713	41	29,233	**20**	03/02/23	22	20-11	Failed (30-0)		
Dist 4	VICTORST	VICTOR ST	20	W ROSSI ST	MCALLISTER ST	R	A	2	674	41	27,634	**68**	03/02/23	69	70-61	Fair (70-51)	05/15/19	SLURRY SEAL
Dist 5	VICTORST	VICTOR ST	110	LARKIN ST	VAN NESS CT (E)	R	A	2	365	42	15,362	**32**	03/02/23	34	40-31	Poor (50-31)	05/15/19	SLURRY SEAL
Dist 5	VICTORST	VICTOR ST	120	VAN NESS CT (E)	VAN NESS CT (W)	R	A	2	1,013	42	42,546	**48**	03/02/23	49	50-41	Poor (50-31)	05/15/19	SLURRY SEAL
Dist 4&5	VICTORST	VICTOR ST	130	VAN NESS CT (W)	MCALLISTER ST	R	A	2	524	41	21,484	**31**	03/02/23	33	40-31	Poor (50-31)	05/15/19	SLURRY SEAL
Dist 3	VICTORWAY	VICTOR WAY	15	WEST END	EAST END	R	A	2	605	42	25,410	**63**	03/02/23	64	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 6	VICTORIAAV	VICTORIA AVE	15	WINDSOR ST	EL DORADO DR	R	A	2	1,643	37	60,791	**69**	02/08/23	70	70-61	Fair (70-51)		
Dist 6	VICTORIACI	VICTORIA CIR	10	VICTORIA AVE	END	R	A	2	273	33	9,009	**66**	02/08/23	67	70-61	Fair (70-51)	01/01/02	REJUVENATION OIL
Dist 3	VILLAST	VILLA ST	10	CENTRAL AVE	WILSON ST	C	C	2	1,285	38	48,830	**36**	03/16/23	38	40-31	Poor (50-31)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	VILLAST	VILLA ST	20	WILSON ST	W MARKET ST	C	A	2	1,105	38	41,990	**61**	03/16/23	63	70-61	Fair (70-51)		
Dist 4	VINCENTPL	VINCENT PL	15	MASSOLO CT (W)	RICO ST	R	A	2	579	33	19,119	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	WACACIAST	W ACACIA ST	010	S MAIN ST	RIKER ST	C	A	2	1,471	35	51,485	**37**	01/25/23	40	40-31	Poor (50-31)	07/16/19	DEEP PATCH
Dist 3	WACACIAST	W ACACIA ST	020	RIKER ST	JUNIPERO WAY	C	A	2	1,356	37	50,172	**45**	01/25/23	48	50-41	Poor (50-31)		
Dist 3	WACACIAST	W ACACIA ST	030	JUNIPERO WAY	W ALISAL ST	C	A	2	2,299	37	85,063	**45**	01/25/23	48	50-41	Poor (50-31)	07/05/19	DEEP PATCH
Dist 3	WACACIAST	W ACACIA ST	040	W ALISAL ST	DAVIS RD	C	A	2	2,483	38	94,354	**36**	01/25/23	39	40-31	Poor (50-31)	06/11/19	DEEP PATCH
Dist 3	WALISALST	W ALISAL ST	010	MAIN ST	LINCOLN AVE	A	A	4	610	60	36,620	**81**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	020	LINCOLN AVE	CHURCH ST	A	A	4	317	60	19,020	**81**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	030	CHURCH ST	RIKER ST	A	A	4	958	60	57,494	**78**	01/24/23	80	80-71	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	040	RIKER ST	HOMESTEAD AVE	A	A	4	958	60	57,480	**82**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	050	HOMESTEAD AVE	COLLEGE DR	A	A	4	1,898	60	113,880	**82**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	060	COLLEGE DR	W ACACIA ST	A	A	4	885	60	53,100	**75**	01/24/23	77	80-71	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	070	W ACACIA ST	PALMA DR	A	A	4	1,141	60	68,460	**80**	01/24/23	82	80-71	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	080	PALMA DR	W BLANCO RD	A	A	4	1,394	60	83,640	**81**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 5	WALVINDR	W ALVIN DR	15	N MAIN ST	CHEROKEE DR	C	A	2	1,997	67	133,799	**36**	02/17/23	39	40-31	Poor (50-31)		
Dist 5	WBERNALDR	W BERNAL DR	15	N MAIN ST	LUPIN DR	R	A	2	420	54	22,680	**57**	03/01/23	58	60-51	Fair (70-51)	06/03/22	FOG SEAL
Dist 3	WBLANCORD	W BLANCO RD	EB010	LUTHER WAY	LOS OLIVOS DR	A	O	2	1,383	30	41,490	**75**	01/20/23	77	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	EB020	LOS OLIVOS DR	RIKER ST	A	O	2	1,431	30	42,930	**75**	01/20/23	77	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	EB030	RIKER ST	PADRE DR	A	O	2	1,250	30	37,500	**76**	01/20/23	78	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	EB040	PADRE DR	S MAIN ST	A	O	2	649	32	20,780	**77**	01/20/23	78	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	WB010	S MAIN ST	PADRE DR	A	O	2	649	32	20,780	**82**	01/20/23	84	90-81	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	WB020	PADRE DR	RIKER ST	A	A	2	1,233	30	36,990	**74**	01/20/23	76	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	WB030	RIKER ST	LOS OLIVOS DR	A	A	2	1,443	30	43,290	**74**	01/20/23	76	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	WB040	LOS OLIVOS DR	LUTHER WAY	A	A	2	1,388	30	41,640	**75**	01/20/23	77	80-71	Good (90-71)	06/03/22	RUBBER
Dist 5	WBOLIVARST	W BOLIVAR ST	15	N MAIN ST	END	R	A	2	490	42	20,580	**34**	03/02/23	36	40-31	Poor (50-31)		
Dist 5	WCURTISST	W CURTIS ST	015	N MAIN ST	PUEBLO DR	R	A	2	2,881	32	92,216	**34**	02/17/23	36	40-31	Poor (50-31)	04/05/19	DEEP PATCH
Dist 3	WGABILANST	W GABILAN ST	25	MAIN ST	LINCOLN AVE	R	A	2	608	32	19,464	**52**	01/26/23	54	60-51	Fair (70-51)		
Dist 3	WGABILANST	W GABILAN ST	40	LINCOLN AVE	CHURCH ST	R	C	2	317	32	10,144	**27**	01/26/23	29	30-21	Failed (30-0)		
Dist 3	WGABILANST	W GABILAN ST	50	CHURCH ST	CAPITOL ST	R	A	2	640	32	20,480	**30**	01/26/23	32	30-21	Failed (30-0)	02/07/19	DEEP PATCH
Dist 3	WLAKEST	W LAKE ST	15	N MAIN ST	RICO ST	R	A	2	2,387	32	76,389	**53**	03/17/23	54	60-51	Fair (70-51)		
Dist 5	WLAMARST	W LAMAR ST	10	CASTRO ST	N MAIN ST	R	A	2	200	32	6,400	**40**	03/02/23	42	40-31	Poor (50-31)	01/01/08	CAPE SEAL
Dist 5	WLAURELDR	W LAUREL DR	015	NMAIN ST	PARK SIDE ST	A	A	4	1,144	68	77,792	**62**	08/14/23	63	70-61	Fair (70-51)	08/14/23	SEAL CRACKS
Dist 5	WLAURELDR	W LAUREL DR	025	PARK SIDE ST	TYLER ST	A	A	4	1,095	68	74,460	**61**	08/14/23	62	70-61	Fair (70-51)	08/14/23	SEAL CRACKS
Dist 5	WLAURELDR	W LAUREL DR	035	TYLER ST	101 N ON/OFF RAMP	A	A	4	1,104	68	75,072	**65**	08/14/23	66	70-61	Fair (70-51)	08/14/23	SEAL CRACKS
Dist 5	WLAURELDR	W LAUREL DR	140	N DAVIS RD	S FREEWAY ON RAMP	A	A	4	459	100	45,918	**23**	01/19/23	26	30-21	Failed (30-0)		
Dist 5	WLAURELDR	W LAUREL DR	150	N DAVIS RD	EL RANCHO WAY	A	A	4	283	70	19,845	**33**	01/19/23	36	40-31	Poor (50-31)		
Dist 4	WMENKEST	W MENKE ST	10	MARTELLA ST	N MAIN ST	R	A	2	305	48	14,669	**42**	03/17/23	43	50-41	Poor (50-31)	07/16/21	SLURRY SEAL
Dist 3	WROMIELN	W ROMIE LN	010	S MAIN ST	W ROMIE LN (MISSION PARK)	A	A	2	667	32	21,344	**29**	01/20/23	32	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 3	WROMIELN	W ROMIE LN	020	W ROMIE LN (N MISSION PARK)	BAUTISTA DR	A	A	2	669	32	21,408	**52**	01/20/23	54	60-51	Fair (70-51)		
Dist 3	WROMIELN	W ROMIE LN	030	BAUTISTA DR	END	C	A	2	800	32	25,600	**42**	01/20/23	45	50-41	Poor (50-31)		
Dist 3	WROMIELN	W ROMIE LN	110	BAUTISTA DR	W ROMIE LN (S MISSION PARK)	A	A	2	677	32	21,664	**56**	01/20/23	58	60-51	Fair (70-51)	03/07/19	DEEP PATCH
Dist 3&4	WROSSIST	W ROSSI ST	015	N MAIN ST	SANSOME ST	A	A	2	1,429	54	77,191	**39**	01/25/23	41	40-31	Poor (50-31)		
Dist 3&4	WROSSIST	W ROSSI ST	035	SANSOME ST	RICO ST	A	A	2	1,029	54	55,566	**34**	01/25/23	37	40-31	Poor (50-31)		
Dist 3&4	WROSSIST	W ROSSI ST	045	RICO ST	VICTOR ST	A	A	2	2,088	54	112,752	**39**	01/25/23	41	40-31	Poor (50-31)	11/12/19	DEEP PATCH
Dist 3&4	WROSSIST	W ROSSI ST	055	VICTOR ST	N DAVIS RD	A	A	2	1,346	54	72,684	**45**	01/25/23	47	50-41	Poor (50-31)		
Dist 3	WSANJOAQUI	W SAN JOAQUIN ST	10	E SAN JOAQUIN ST	PADRE DR	R	A	2	765	32	24,507	**39**	01/23/23	41	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	WSANLUISST	W SAN LUIS ST	15	SALINAS ST	MAIN ST	A	P	2	353	32	11,310	**65**	03/16/23	66	70-61	Fair (70-51)	06/03/19	SHALLOW PATCH
Dist 3	WSANLUISST	W SAN LUIS ST	55	CAPITOL ST	SALINAS ST	R	P	2	1,210	34	41,143	**54**	03/16/23	55	60-51	Fair (70-51)	01/29/19	DEEP PATCH
Dist 3	WSANLUISST	W SAN LUIS ST	85	CAPITOL ST	WEST ST	R	P	2	638	34	21,722	**61**	01/25/23	62	70-61	Fair (70-51)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
	WMARKET183	W. MARKET ST (SR-183)	010	DAVIS RD SB ON-RAMP	DAVIS RD NB ON-RAMP	NCR	A	4	900	66	59,400	**73**	03/17/23	74	80-71	Good (90-71)		
	WMARKET183	W. MARKET ST (SR-183)	020	DAVIS RD NB ON-RAMP	CLARK ST	NCR	A	4	740	72	53,280	**67**	03/17/23	68	70-61	Fair (70-51)		
	WMARKET183	W. MARKET ST (SR-183)	030	CLARK ST	RIKER ST	NCR	A	4	2,890	58	167,620	**45**	03/17/23	46	50-41	Poor (50-31)		
	WMARKET183	W. MARKET ST (SR-183)	040	RIKER ST	MONTEREY ST	NCR	A	4	2,410	68	163,880	**51**	03/17/23	52	60-51	Fair (70-51)		
Dist 4	WASHINGTON	WASHINGTON DR	10	LINDEN ST	OREGON ST	R	A	2	793	25	19,837	**29**	03/03/23	31	30-21	Failed (30-0)	01/01/07	CAPE SEAL
Dist 6	WATERBURYW	WATERBURY WAY	10	CANTERBURY ST	LEXINGTON DR	R	A	2	262	32	8,393	**68**	02/03/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	WATERFORDC	WATERFORD CIR	10	INGLEWOOD ST	END	R	A	2	237	32	7,587	**69**	02/04/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	WELLINGTON	WELLINGTON CT	15	DECLARATION ST (W)	DECLARATION ST (E)	R	A	2	1,819	32	58,237	**72**	02/02/23	74	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	WENTWORTHC	WENTWORTH CIR	10	LONDONDERRY WAY	END	R	A	2	154	32	4,928	**69**	02/04/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 3	WESTST	WEST ST	035	W MARKET ST	CENTRAL AVE	R	P	2	1,630	32	52,160	**36**	03/16/23	37	40-31	Poor (50-31)	07/29/19	DEEP PATCH
Dist 3	WESTST	WEST ST	075	W ALISAL ST	CLAY ST	R	A	2	1,114	32	35,667	**38**	01/25/23	40	40-31	Poor (50-31)		
Dist 3	WESTST	WEST ST	090	LANG ST	GEIL ST	R	A	2	323	32	10,344	**45**	01/25/23	47	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	WESTST	WEST ST	100	LANG ST	END	R	A	2	274	32	8,771	**29**	01/25/23	31	30-21	Failed (30-0)	11/05/19	DEEP PATCH
Dist 6	WESTFIELDC	WESTFIELD CIR	10	HANCOCK ST	END	R	A	2	329	31	10,199	**71**	02/03/23	72	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	WESTMINSTE	WESTMINSTER DR	10	MCKINNON ST	CAMBRIDGE CT	R	A	2	1,642	38	62,396	**70**	02/17/23	71	70-61	Fair (70-51)		
Dist 6	WESTPORTCI	WESTPORT CIR	10	INGLEWOOD ST	END	R	A	2	104	66	6,873	**68**	02/04/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 5	WESTRIDGEP	WESTRIDGE PKWY	10	N DAVIS RD	WEST CITY LIMITS	A	A	4	1,261	78	98,358	**48**	02/10/23	50	50-41	Poor (50-31)	01/01/02	SLURRY SEAL
Dist 6	WHEELERDR	WHEELER DR	15	E ALVIN DR	END	R	A	2	846	41	34,686	**65**	08/15/23	66	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WHITERIVER	WHITE RIVER CIR	10	STONY BROOK DR	END	R	A	2	489	32	15,657	**70**	02/03/23	71	70-61	Fair (70-51)		
Dist 1	WHITMANCIR	WHITMAN CIR	10	LONGFELLOW DR	END	R	A	2	420	32	13,440	**45**	02/02/23	47	50-41	Poor (50-31)	01/01/00	REJUVENATION OIL
Dist 1	WHITMANST	WHITMAN ST	15	NANTUCKET BLVD	LONGFELLOW DR	R	A	2	480	37	17,760	**68**	02/02/23	69	70-61	Fair (70-51)		
Dist 3	WILGARTWAY	WILGART WAY	25	MAPLEWOOD DR	E ROMIE LN	R	A	2	754	32	24,128	**27**	01/19/23	29	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 3	WILGARTWAY	WILGART WAY	35	E ROMIE LN	SAN MIGUEL AVE	R	C	2	1,442	32	46,144	**64**	01/19/23	65	70-61	Fair (70-51)		
Dist 2	WILLIAMSRD	WILLIAMS RD	010	E ALISAL ST	E MARKET ST	A	A	4	1,769	64	113,216	**38**	01/18/23	41	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 2	WILLIAMSRD	WILLIAMS RD	020	E MARKET ST	BELLEHAVEN ST	A	A	4	1,412	64	90,368	**37**	01/18/23	40	40-31	Poor (50-31)	11/12/19	DEEP PATCH
Dist 2	WILLIAMSRD	WILLIAMS RD	030	BELLEHAVEN ST	BARDIN WAY	A	A	4	1,481	64	94,784	**40**	01/18/23	42	40-31	Poor (50-31)	10/31/19	SHALLOW PATCH
Dist 1&2	WILLIAMSRD	WILLIAMS RD	050	DEL MONTE AVE	FREEDOM PKWY	A	A	4	2,751	80	220,080	**73**	10/05/23	73	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 2	WILLIAMSRD	WILLIAMS RD	055	BARDIN RD	DEL MONTE AVE	A	A	4	971	76	73,815	**45**	01/18/23	47	50-41	Poor (50-31)	01/03/19	DEEP PATCH
Dist 1	WILLIAMSRD	WILLIAMS RD	060	FREEDOM PKWY	E BORONDA RD	C	A	3	2,133	57	121,581	**75**	10/05/23	75	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 1	WILLIAMSRD	WILLIAMS RD	070	E BORONDA RD	OLD STAGE RD	C	A	2	5,963	24	143,112	**25**	01/18/23	29	30-21	Failed (30-0)		
Dist 3	WILLOWST	WILLOW ST	15	S MAIN ST	CALIFORNIA ST	R	P	2	1,463	32	46,816	**45**	01/20/23	46	50-41	Poor (50-31)		
Dist 3	WILSONST	WILSON ST	15	HOMESTEAD AVE	VILLA ST	R	C	2	635	33	20,979	**22**	03/16/23	24	30-21	Failed (30-0)		
Dist 3	WILSONST	WILSON ST	45	VILLA ST	SAN CLEMENTE AVE	R	C	2	1,194	33	39,429	**29**	03/16/23	30	30-21	Failed (30-0)		
Dist 6	WIMBLEDONA	WIMBLEDON AVE	10	OXFORD CT	ESSEX WAY	R	A	2	243	38	9,234	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONA	WIMBLEDON AVE	20	ESSEX WAY	COP 375' E/O ESSEX WAY	R	A	2	375	37	13,875	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONA	WIMBLEDON AVE	30	COP 375' E/O ESSEX WAY	WIMBLEDON WAY	R	A	2	480	38	18,240	**72**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONA	WIMBLEDON AVE	40	WIMBLEDON WAY	CHELSEA CT	R	A	2	237	37	8,769	**73**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONC	WIMBLEDON CIR	20	WIMBLEDON AVE	END	R	A	2	273	37	10,101	**73**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONW	WIMBLEDON WAY	10	WIMBLEDON AVE	ARCADIA WAY	R	A	2	247	38	9,386	**73**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WINDSORST	WINDSOR ST	15	CHARDONNAY DR	HARDEN PKWY	R	A	2	1,049	37	38,849	**69**	03/01/23	70	70-61	Fair (70-51)		
Dist 3	WINHAMST	WINHAM ST	35	S MAIN ST	END	R	P	2	2,361	42	99,169	**39**	03/16/23	40	40-31	Poor (50-31)	03/07/19	DEEP PATCH
Dist 2	WIRENST	WIREN ST	10	WILLIAMS RD	N. END	R	A	2	1,000	32	32,000	**15**	03/15/23	17	20-11	Failed (30-0)	01/01/91	CAPE SEAL
Dist 1	WOLFCT	WOLF CT	10	EAGLE DR (W)	EAGLE DR (E)	R	A	2	1,079	34	36,686	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 6	WOODBURYCI	WOODBURY CIR	10	CANTERBURY ST	END	R	A	2	155	32	4,960	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	WOODSIDECI	WOODSIDE CIR	10	WOODSIDE DR	END	R	A	2	172	32	5,525	**44**	01/23/23	46	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	WOODSIDEDR	WOODSIDE DR	010	RIKER ST	IVERSON ST	R	A	2	1,209	32	38,688	**39**	01/23/23	41	40-31	Poor (50-31)		
Dist 3	WOODSIDEDR	WOODSIDE DR	020	IVERSON ST	SAN VINCENTE AVE	R	A	2	1,113	32	35,616	**39**	01/23/23	41	40-31	Poor (50-31)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted Alphabetically

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	WORKCIR	WORK CIR	10	WORK ST	END	R	A	2	402	32	12,877	**40**	01/18/23	42	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 3	WORKST	WORK ST	10	JOHN ST	E ALISAL ST	A	A	2	1,481	38	56,294	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 3	WORKST	WORK ST	20	JOHN ST	WORK CIR	A	A	4	1,036	62	64,279	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 3	WORKST	WORK ST	30	WORK CIR	ELVEE DR	A	A	4	1,922	62	119,164	**69**	01/18/23	70	70-61	Fair (70-51)		
Dist 3	WORKST	WORK ST	50	S SANBORN RD	ELVEE DR	A	A	4	1,902	62	117,940	**35**	01/18/23	38	40-31	Poor (50-31)	03/06/19	DEEP PATCH
Dist 6	YALECIR	YALE CIR	10	PENNSYLVANIA DR	END	R	A	2	200	31	6,200	**68**	08/15/23	68	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	YOLOCIR	YOLO CIR	10	MENDOCINO DR	END	R	A	2	247	38	9,386	**23**	02/17/23	25	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 6	YOSEMITECI	YOSEMITE CIR	10	YOSEMITE WAY	END	R	A	2	423	32	13,543	**28**	02/08/23	30	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	YOSEMITEWA	YOSEMITE WAY	15	CASCADE CT	HUBOLDT DR	R	A	2	503	32	16,124	**26**	02/08/23	28	30-21	Failed (30-0)		
Dist 3	YOUNGDR	YOUNG DR	10	KIRKWOOD AVE (N)	KIRKWOOD AVE (S)	R	A	2	1,040	32	33,285	**39**	03/16/23	41	40-31	Poor (50-31)	02/13/19	DEEP PATCH
Dist 6	YREKADR	YREKA DR	15	CALAVERAS DR	KLAMATH DR	R	A	2	1,398	32	44,736	**31**	02/08/23	33	40-31	Poor (50-31)		
Dist 1	YUCATANWAY	YUCATAN WAY	15	MAZATLAN ST	NOGAL DR	R	A	2	695	38	26,410	**80**	02/01/23	81	80-71	Good (90-71)		
Dist 6	ZINFANDELW	ZINFANDEL WAY	10	CHARDONNAY DR	WINDSOR ST	R	A	2	835	33	27,555	**66**	03/01/23	67	70-61	Fair (70-51)	01/01/07	SLURRY SEAL

Street List PCI High to Low

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 5	EBORONDARD	E BORONDA RD	010EB	N MAIN ST	SAN JUAN GRADE RD	A	A	2	1,684	40	67,360	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 5	EBORONDARD	E BORONDA RD	WB020	SAN JUAN GRADE RD	N MAIN ST	A	A	2	1,684	40	67,360	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 5&6	SANJUANGRA	SAN JUAN GRADE RD	060	E BORONDA RD	W/C 400' NE OF NORTHRIDGE WAY	A	A	4	1,030	81	83,430	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 5&6	SANJUANGRA	SAN JUAN GRADE RD	065	W/C 400' NE OF NORTHRIDGE WAY	VAN BUREN AVE	A	A	2	985	38	37,430	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 5&6	SANJUANGRA	SAN JUAN GRADE RD	070	VAN BUREN AVE	RUSSEL RD	A	A	2	2,807	38	106,666	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 3	WORKST	WORK ST	10	JOHN ST	E ALISAL ST	A	A	2	1,481	38	56,294	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 3	WORKST	WORK ST	20	JOHN ST	WORK CIR	A	A	4	1,036	62	64,279	**97**	10/05/23	100	100-91	Excellent (100-91)	10/05/23	6" MILL & FILL (SURFACE RECON)
Dist 4	EUCALYPTUS	EUCALYPTUS DR	15	N SANBORN RD	E ALISAL ST	R	A	2	2,863	32	91,638	**96**	08/25/23	100	100-91	Excellent (100-91)	08/25/23	6" MILL & FILL (SURFACE RECON)
Dist 3	CAMPUSAVE	CAMPUS AVE	010	HASTINGS AVE	LEMOS AVE	R	O	2	675	32	21,600	**95**	06/28/23	100	100-91	Excellent (100-91)	06/28/23	HEAVY REHAB
Dist 3	CAMPUSAVE	CAMPUS AVE	020	LEMOS AVE	FAIRFAX DR	R	O	2	250	31	7,750	**95**	06/28/23	100	100-91	Excellent (100-91)	06/28/23	HEAVY REHAB
Dist 2	DALLASAVE	DALLAS AVE	10	GARNER AVE	CORTEZ ST	R	O	2	775	36	27,900	**95**	05/29/23	100	100-91	Excellent (100-91)	05/29/23	HEAVY REHAB
Dist 2	DALLASAVE	DALLAS AVE	20	CORTEZ ST	DEL MONTE AVE	R	O	2	770	36	27,720	**95**	05/29/23	100	100-91	Excellent (100-91)	05/29/23	HEAVY REHAB
Dist 1	CAOBAWAY	CAOBA WAY	10	AMARILLO WAY	NOGAL DR	R	O	2	875	32	28,000	**94**	02/01/23	99	100-91	Excellent (100-91)	10/12/22	LIGHT REHAB
Dist 3	EROMIELN	E ROMIE LN	030	LOS PALOS DR	ABBOTT ST	A	C	4	1,766	62	109,492	**94**	08/15/23	96	100-91	Excellent (100-91)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	ALISALRD	ALISAL RD	010	CITY LIMIT	ROUND ABOUT @ SCONBERG	A	A	4	220	53	11,660	**93**	01/25/23	100	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	ALISALRD	ALISAL RD	020	ROUND ABOUT @ SCONBERG	ROUND ABOUT @ BARDIN/ E ALISA	A	A	4	375	39	14,625	**93**	01/25/23	100	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	ALISALRDRA	ALISAL RD ROUNDABOUT @ BARDIN/ E ALISAL	010	WB ENTRANCE	ONE LOOP	A	A	1	360	26	9,360	**93**	03/15/23	100	100-91	Excellent (100-91)		
Dist 2	ALISALRDRA	ALISAL RD ROUNDABOUT @ SCONBERG	005	NB ENTRANCE	ONE LOOP	A	A	1	360	26	9,360	**93**	03/15/23	100	100-91	Excellent (100-91)		
Dist 2	BARDINRD	BARDIN RD	010	E ALISAL RD	SYCAMORE RD	C	A	4	405	62	25,110	**93**	03/15/23	94	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	BARDINRD	BARDIN RD	020	TORO AVE	WILLIAMS RD	C	O	4	675	66	44,550	**93**	03/15/23	95	100-91	Excellent (100-91)	12/01/22	HEAVY REHAB
Dist 2	EALISALFRD	E ALISAL FRONTAGE RD	010	BARDIN RD	E ALISAL ST	A	A	2	252	32	8,064	**93**	01/25/23	96	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	EALISALRA	E ALISAL ROUNDABOUT @ SKYWAY	010	WB ENTRANCE	ONE LOOP	A	A	1	360	26	9,360	**93**	03/15/23	100	100-91	Excellent (100-91)		
Dist 2	EALISALST	E ALISAL ST	010	BARDIN/ALISAL RD ROUNDABOUT	MARGARET ST	A	A	2	450	50	22,500	**93**	01/25/23	96	100-91	Excellent (100-91)	12/01/22	RECONSTRUCT STRUCTURE (AC)
Dist 2	FREEDOMPKW	FREEDOM PKWY	070	PADOVA DR	SCONBERG PKWY	C	A	2	1,241	32	39,712	**93**	02/01/23	94	100-91	Excellent (100-91)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	SCONBERGPK	SCONBERG PKWY	20	MONTE BELLA BLVD	PAVIA WAY	C	A	2	1,769	32	56,608	**93**	02/10/23	95	100-91	Excellent (100-91)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	SCONBERGPK	SCONBERG PKWY	30	PAVIA WAY	FREEDOM PKWY	C	A	2	920	32	29,440	**93**	02/10/23	95	100-91	Excellent (100-91)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	BARDINFRD	BARDIN FRONTAGE RD	010	ALISAL RD	BARDIN RD	C	O	2	525	22	11,550	**92**	03/15/23	100	100-91	Excellent (100-91)	12/01/22	HEAVY REHAB
Dist 2	BARDINRD	BARDIN RD	015	SYCAMORE RD	TORO AVE	C	O	4	1,645	66	108,570	**92**	03/15/23	94	100-91	Excellent (100-91)	12/01/22	HEAVY REHAB
Dist 3	MELODYLN	MELODY LN	30	W GABILAN ST	END	NCR	P	2	172	15	2,593	**92**	01/26/23	92	100-91	Excellent (100-91)		
Dist 2	CAMPANIAWA	CAMPANIA WAY	20	C.O.P.	WEST END	R	A	2	550	34	18,700	**91**	03/15/23	93	100-91	Excellent (100-91)		
Dist 2&4	EALISALST	E ALISAL ST	080	N SANBORN RD	N HEBBRON AVE	A	A	4	1,423	75	106,725	**91**	08/15/23	92	100-91	Excellent (100-91)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	STATIONPL	STATION PL	10	W MARKET ST	RAILROAD AVE	NCR	C	2	361	56	20,216	**90**	03/17/23	91	90-81	Good (90-71)		
Dist 2	BELLAGIOWA	BELLAGIO WAY	10	CAMPANIA WAY	PALERMO DR	R	A	2	641	32	20,512	**89**	03/15/23	90	90-81	Good (90-71)		
Dist 4	BRIDGEST	BRIDGE ST	30	E ROSSI ST	S END (WALL)	R	P	2	240	24	5,760	**89**	03/16/23	89	90-81	Good (90-71)		
Dist 3	MAINST	MAIN ST	25	E SAN LUIS ST	W GABILAN ST	C	A	2	1,351	37	49,993	**89**	03/16/23	91	90-81	Good (90-71)	06/25/21	RECONSTRUCT STRUCTURE (AC)
Dist 2	PALERMODR	PALERMO DR	040	MODENA WAY	MONTE BELLA BLVD (N)	C	A	2	334	37	12,358	**89**	08/15/23	89	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	CANELLICT	CANELLI CT	15	TUSCANY BLVD	CANELLI CT	R	A	2	1,642	33	54,186	**88**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	MASSOLOCIR	MASSOLO CIR	10	MASSOLO CT	END	R	A	2	200	32	6,400	**88**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PALERMODR	PALERMO DR	030	PADOVA DR	MODENA WAY	C	A	2	546	37	20,202	**88**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PAVIACIR	PAVIA CIR	10	PALERMO DR	END	R	A	2	262	32	8,384	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	PAVIAWAY	PAVIA WAY	10	PALERMO DR	SCONBERG PKWY	R	A	2	470	37	17,390	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	PIAZZADR	PIAZZA DR	15	MONTE BELLA BLVD	END	R	A	2	2,696	37	99,752	**88**	08/15/23	89	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PISACIR	PISA CIR	10	PALERMO DR	END	R	A	2	181	32	5,792	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	SARDINADR	SARDINA DR	15	CAPRI WAY	BELLAGIO WAY	R	A	2	907	32	29,024	**88**	08/15/23	89	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	SPOLETOCIR	SPOLETO CIR	10	SPOLETO WAY	END	R	A	2	378	32	12,126	**88**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	SPOLETOWAY	SPOLETO WAY	10	CANELLI CT	SPOLETO CIR	R	A	2	234	33	7,722	**88**	08/15/23	89	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	VENICECIR	VENICE CIRCLE	10	ROSSANO WAY	END	R	A	2	287	32	9,184	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	VENICEWAY	VENICE WAY	20	ROSSANO WAY	PAVIA WAY	R	A	2	475	32	15,200	**88**	03/15/23	90	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	AREZZOCIR	AREZZO CIR	15	SIENA WAY	END	R	A	2	559	32	17,897	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	CAMPANIAWA	CAMPANIA WAY	15	PALERMO DR	C.O.P.	R	A	2	632	34	21,590	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2&4	EALISALST	E ALISAL ST	090	N HEBBRON AVE	N WOOD ST	A	A	4	944	75	70,800	**87**	08/15/23	88	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	ETNACIR	ETNA CIR	10	PALERMO DR	END	R	A	2	290	32	9,280	**87**	03/15/23	88	90-81	Good (90-71)		
Dist 3	LACEYLN	LACEY LN	10	E GABILAN ST	MONTEREY ST	R	P	2	265	15	3,975	**87**	03/16/23	87	90-81	Good (90-71)		
Dist 2	MARSALACIR	MARSALA CIR	10	PALERMO DR	END	R	A	2	419	32	13,408	**87**	03/15/23	88	90-81	Good (90-71)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	NAPOLICIR	NAPOLI CIR	10	PALERMO DR	END	R	A	2	298	32	9,536	**87**	03/15/23	88	90-81	Good (90-71)		
Dist 6	NATIVIDADR	NATIVIDAD RD	SB130	E ALVIN DR	RAINIER DR	A	P	3	1,109	36	39,924	**87**	01/24/23	87	90-81	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 2	PALERMODR	PALERMO DR	010	MONTE BELLA BLVD (S)	CAMPANIA WAY	C	A	2	1,820	37	67,340	**87**	03/15/23	88	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	PALERMODR	PALERMO DR	020	CAMPANIA CIR	PADOVA DR	C	A	2	697	37	25,789	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	ROSSANOCIR	ROSSANO CIR	10	ROSSANO WAY	END	R	A	2	244	32	7,808	**87**	03/15/23	88	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 2	SIENAWAY	SIENA WAY	15	PIAZZA DR	END	R	A	2	812	37	30,044	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	TUSCANYCIR	TUSCANY CIR	10	TUSCANY WAY	END	R	A	2	200	32	6,400	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	VERONACT	VERONA CT	15	VERONA WAY	PIAZZA DR	R	A	2	1,978	35	69,230	**87**	08/15/23	87	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BUCKINGHAM	BUCKINGHAM CIR	10	BUCKINGHAM DR	END	R	A	2	168	32	5,384	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BUCKINGHA1	BUCKINGHAM DR	20	DORSET WAY	ARCADIA WAY	R	A	2	702	37	25,974	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	CASSINOWAY	CASSINO WAY	15	SPOLETO ST (N)	SPOLETO ST (S)	R	A	2	1,041	37	38,517	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3&4	EALISALST	E ALISAL ST	120WB	START PCC W/O PRADER	END PCC E/O FRONT ST	A	P	2	475	28	13,300	**86**	01/25/23	86	90-81	Good (90-71)		
Dist 3	ELVEEDR	ELVEE DR	20	PCC BRIDGE	WORK ST	R	C	2	775	42	32,550	**86**	01/18/23	87	90-81	Good (90-71)		
Dist 6	EMERALDDR	EMERALD DR	15	ARCADIA WAY	EMERALD WAY	R	A	2	872	37	32,264	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	GENOACIR	GENOA CIR	10	GENOA WAY	END	R	A	2	248	32	7,954	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	GENOAWAY	GENOA WAY	15	AREZZO CIR	MONTE BELLA BLVD	R	A	2	513	32	16,429	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PADOVADR	PADOVA DR	10	PALERMO DR	FREEDOM PKWY	R	A	2	697	37	25,789	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	ROSSANOCT	ROSSANO CT	15	PALERMO DR (N)	PALERMO DR (S)	R	A	2	1,321	33	43,593	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	VERONAWAY	VERONA WAY	15	MONTE BELLA BLVD	VERONA CT (W)	R	A	2	387	38	14,706	**86**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	BOLOGNACT	BOLOGNA CT	10	BOLOGNA WAY (W)	BOLOGNA WAY (E)	R	A	2	737	32	23,584	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	BOLOGNAWAY	BOLOGNA WAY	15	SIENA WAY	PIAZZA DR	R	A	2	782	32	25,054	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	CAPRIWAY	CAPRI WAY	15	PIAZZA DR	END	R	A	2	810	32	25,933	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	CASSINOCIR	CASSINO CIR	10	CASSINO WAY	END	R	A	2	290	32	9,280	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	EROMIELN	E ROMIE LN	020	ALAMEDA AVE	LOS PALOS DR	A	A	4	1,186	62	73,572	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	ELDORADODR	EL DORADO DR	10	E BORONDA RD	HARDEN PKWY	C	A	2	2,067	41	84,747	**85**	10/05/23	85	90-81	Good (90-71)	10/05/23	CHIP SEAL
Dist 3	ELVEEDR	ELVEE DR	10	S SANBORN RD	PCC BRIDGE	R	A	2	2,527	24	60,648	**85**	01/18/23	86	90-81	Good (90-71)		
Dist 2	FREEDOMPKW	FREEDOM PKWY	060	TUSCANY BLVD	PADOVA DR	C	A	2	1,167	30	35,010	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	MARSALAWAY	MARSALA WAY	10	PALERMO DR	BELLAGIO WAY	R	A	2	682	34	23,188	**85**	03/15/23	86	90-81	Good (90-71)		
Dist 2	MODENAST	MODENA ST	15	CAMPANIA WAY	END	R	A	2	1,005	34	34,170	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	MODENAWAY	MODENA WAY	10	MODENA ST	PALERMO DR	R	A	2	272	33	8,976	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	NATIVIDADR	NATIVIDAD RD	030NB	RAINIER DR	E ALVIN DR	A	P	3	1,109	36	39,924	**85**	01/24/23	86	90-81	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 4	PRESCOTTCI	PRESCOTT CIR	10	ARGUELLO DR	END	R	A	2	166	34	5,644	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	SCONBERGPK	SCONBERG PKWY	10	ALISAL RD	MONTE BELLA BLVD	C	A	2	875	32	28,000	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	SPOLETOST	SPOLETO ST	15	CASSINO WAY	END	R	A	2	1,254	33	41,382	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	TRIVOLIWAY	TRIVOLI WAY	10	CAMPANIA WAY	MONTE BELLA BLVD	R	A	2	752	33	24,816	**85**	08/15/23	86	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	TUSCANYWAY	TUSCANY WAY	15	CASSINO WAY	TUSCANY BLVD	R	A	2	316	34	10,744	**85**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	ARGUELLODR	ARGUELLO DR	15	SANSOME ST	END	R	A	2	890	32	28,480	**84**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BUCKINGHA1	BUCKINGHAM DR	10	CASCADE WAY	DORSET WAY	R	A	2	626	38	23,788	**84**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BUCKINGHA2	BUCKINGHAM WAY	10	EL DORADO DR	BUCKINGHAM DR	R	A	2	169	44	7,436	**84**	08/15/23	84	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	CAMPANIACI	CAMPANIA CIR	10	PALERMO DR	EAST END	R	A	2	242	32	7,744	**84**	03/15/23	85	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 6	CASCADEWAY	CASCADE WAY	15	BUCKINGHAM DR	C.O.P.	R	A	2	225	37	8,325	**84**	08/15/23	84	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	CLINTONCT	CLINTON CT	20	MANHATTAN DR at HUDSON WAY	CLINTON CT	R	A	2	895	33	29,535	**84**	08/15/23	84	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2&4	EALISALST	E ALISAL ST	100	N WOOD ST	KERN ST	A	A	4	1,427	75	107,025	**84**	08/15/23	84	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	OXFORDCT	OXFORD CT	10	WIMBLEDON AVE W. SIDE	WIMBLEDON AVE E. SIDE	R	A	2	1,358	32	43,456	**84**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PALERMOCT	PALERMO CT	10	PALERMO DR	BELLAGIO WAY	R	A	2	939	32	30,048	**84**	03/15/23	85	90-81	Good (90-71)		
Dist 6	PRINCETON1	PRINCETON CT	15	PENNSYLVANIA DR (W)	PENNSYLVANIA DR (E)	R	A	2	1,271	33	41,943	**84**	08/15/23	85	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	ROSSANOWAY	ROSSANO WAY	15	ROSSANO CT	VENICE WAY	R	A	2	567	32	18,144	**84**	03/15/23	85	90-81	Good (90-71)	06/21/22	RECONSTRUCT SURFACE (AC)
Dist 6	CLINTONCT	CLINTON CT	10	MANHATTAN DR	S END	R	A	2	347	33	11,451	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	EBORONDARD	E BORONDA RD	110	MESQUITE DR	N SANBORN RD	A	A	2	973	45	43,785	**83**	01/24/23	85	90-81	Good (90-71)	06/03/22	RUBBER
Dist 6	ESSEXWAY	ESSEX WAY	10	ESSEX CIR	ARCADIA WAY	R	A	2	254	37	9,398	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	NDAVISRD	N DAVIS RD	150SB	SLOAT DR	W ROSSI ST	A	O	2	751	32	24,032	**83**	10/05/23	83	90-81	Good (90-71)	10/05/23	CHIP SEAL
Dist 6	PRINCETONC	PRINCETON CIR	10	PRINCETON CT	END	R	A	2	175	31	5,425	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONA	WIMBLEDON AVE	10	OXFORD CT	ESSEX WAY	R	A	2	243	38	9,234	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONA	WIMBLEDON AVE	20	ESSEX WAY	COP 375' E/O ESSEX WAY	R	A	2	375	37	13,875	**83**	08/15/23	83	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	AIRPORTBLV	AIRPORT BLVD	020	MERCER WAY	ROY DIAZ ST	C	A	4	2,193	62	135,966	**82**	01/17/23	84	90-81	Good (90-71)	06/03/22	RUBBER
Dist 2	EALISALST	E ALISAL ST	030	FERN ST	TAMPA ST	A	A	2	1,167	53	61,851	**82**	01/25/23	83	90-81	Good (90-71)	12/01/22	SLURRY SEAL
Dist 4	GREENWICHW	GREENWICH WAY	15	ARGUELLO DR	SANSOME ST	R	A	2	598	34	20,332	**82**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	MCKINNONST	MCKINNON ST	30	HARDEN PKWY	CHARDONNAY DR	C	A	2	1,029	42	43,218	**82**	10/05/23	82	90-81	Good (90-71)	10/05/23	CHIP SEAL
	NMAIN183	N. MAIN ST (SR-183)	020NB&SB	END DIVIDED RD	END PCC N/O CASENTINI	NCR	P	4	2,450	84	205,800	**82**	01/20/21	83	90-81	Good (90-71)		
Dist 6	NICOLECIR	NICOLE CIR	10	BOYLE CT	END	R	A	2	167	32	5,440	**82**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	PIAZZACIR	PIAZZA CIR	10	PIAZZA DR	END	R	A	2	210	32	6,720	**82**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	STRATFORDC	STRATFORD CT	10	EMERALD DR N. SIDE	EMERALD DR S. SIDE	R	A	2	1,037	32	33,184	**82**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	040	RIKER ST	HOMESTEAD AVE	A	A	4	958	60	57,480	**82**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	050	HOMESTEAD AVE	COLLEGE DR	A	A	4	1,898	60	113,880	**82**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WBLANCORD	W BLANCO RD	WB010	S MAIN ST	PADRE DR	A	O	2	649	32	20,780	**82**	01/20/23	84	90-81	Good (90-71)	06/03/22	RUBBER
Dist 6	ARCADIAWAY	ARCADIA WAY	20	COP 335' E/O ARCADIA CT (N)	NATIVIDAD RD	C	A	2	635	44	27,940	**81**	08/15/23	81	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	CALLECEBU	CALLE CEBU	15	SHERWOOD DR	SUN WAY	R	A	2	1,056	37	39,072	**81**	01/26/23	82	90-81	Good (90-71)	06/03/22	FOG SEAL
Dist 2	EALISALST	E ALISAL ST	020	MARGARET ST	FERN ST	A	A	2	911	53	48,283	**81**	01/25/23	83	90-81	Good (90-71)	12/01/22	SLURRY SEAL
Dist 2	EALISALST	E ALISAL ST	050	E MARKET ST	QUILLA ST	A	A	2	1,205	42	50,610	**81**	01/25/23	83	90-81	Good (90-71)	05/10/21	DEEP PATCH
Dist 3	EALISALST	E ALISAL ST	130WB	END PCC E/O FRONT ST	FRONT ST	A	A	2	270	24	6,480	**81**	01/25/23	82	90-81	Good (90-71)	01/01/99	SLURRY SEAL
Dist 3	EALISALST	E ALISAL ST	150EB	FRONT ST	START PCC E/O FRONT	A	A	2	270	26	7,020	**81**	01/25/23	82	90-81	Good (90-71)		
Dist 6	EALVINDR	E ALVIN DR	35	LINWOOD DR	EL DORADO DR	A	A	4	790	62	48,980	**81**	01/25/23	82	90-81	Good (90-71)	04/30/21	SLURRY SEAL
Dist 4	GREENBRIAR	GREENBRIAR WAY	15	SANSOME ST	END	R	A	2	1,060	32	33,938	**81**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	LAFAYETTEW	LAFAYETTE WAY	15	DELANCEY DR	BROADWAY DR	R	A	2	677	37	25,049	**81**	08/15/23	82	90-81	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4&6	LINWOODDR	LINWOOD DR	010	E ALVIN DR	RAINIER DR	C	A	2	1,253	44	55,132	**81**	02/17/23	82	90-81	Good (90-71)	04/27/21	SLURRY SEAL
Dist 4	LINWOODDR	LINWOOD DR	020SB	RAINIER DR	E LAUREL DR	C	A	2	1,982	26	51,532	**81**	02/17/23	82	90-81	Good (90-71)	05/03/21	SLURRY SEAL
Dist 1&2	NSANBORNRD	N SANBORN RD	50	GARNER AVE	E LAUREL DR	A	A	2	2,074	64	132,784	**81**	01/18/23	83	90-81	Good (90-71)	06/03/22	FOG SEAL
Dist 3	WALISALST	W ALISAL ST	010	MAIN ST	LINCOLN AVE	A	A	4	610	60	36,620	**81**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	020	LINCOLN AVE	CHURCH ST	A	A	4	317	60	19,020	**81**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	080	PALMA DR	W BLANCO RD	A	A	4	1,394	60	83,640	**81**	01/24/23	83	90-81	Good (90-71)	10/01/20	SLURRY SEAL
Dist 1	ALDERCIR	ALDER CIR	10	NOGAL DR	END	R	A	2	339	33	11,212	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 1	ANTELOPEDR	ANTELOPE DR	15	BADGER WAY	COUGAR DR	R	A	2	765	37	28,305	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 6	ASTORCIR	ASTOR CIR	10	ASTOR WAY	END	R	A	2	226	31	7,006	**80**	08/15/23	80	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	ASTORWAY	ASTOR WAY	15	BROADWAY DR	HUDSON WAY	R	A	2	580	33	19,140	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	BOBCATWAY	BOBCAT WAY	10	ANTELOPE DR	COUGAR DR	R	A	2	762	34	25,908	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 6	BRISTOLCIR	BRISTOL CIR	10	BEACON HILL DR	NE END	R	A	2	290	32	9,280	**80**	02/02/23	81	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	BROADWAYDR	BROADWAY DR	15	PENNSYLVANIA DR	HARDEN PKWY	R	A	2	1,203	41	49,323	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	BUCKEYEWAY	BUCKEYE WAY	10	MADRONE DR	NOGAL DR	R	A	2	375	38	14,284	**80**	02/01/23	81	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 1	COUGARDR	COUGAR DR	15	ANTELOPE DR	FREEDOM PKWY	R	A	2	2,407	37	89,059	**80**	02/01/23	81	80-71	Good (90-71)	04/16/19	SLURRY SEAL
Dist 3	EALISALST	E ALISAL ST	140	FRONT ST	MAIN ST	A	A	4	1,700	64	108,800	**80**	01/25/23	81	80-71	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3&4	EALISALST	E ALISAL ST	160EB	START PCC E/O FRONT ST	END PCC	A	P	2	475	28	13,300	**80**	01/25/23	81	80-71	Good (90-71)		
Dist 4&6	EALVINDR	E ALVIN DR	15	N MAIN ST	MCKINNON ST	A	A	4	2,314	62	143,468	**80**	01/25/23	82	80-71	Good (90-71)	04/28/21	SLURRY SEAL
Dist 4&6	EALVINDR	E ALVIN DR	25	MCKINNON ST	LINWOOD DR	A	A	4	1,678	64	107,392	**80**	01/25/23	82	80-71	Good (90-71)	04/29/21	SLURRY SEAL
Dist 6	EALVINDR	E ALVIN DR	55	MARIN AVE	NATIVIDAD RD	A	A	4	545	62	33,790	**80**	01/25/23	82	80-71	Good (90-71)	04/30/21	SLURRY SEAL
Dist 4	EBERNALDR	E BERNAL DR	20	ROSARITA DR	ALPINE DR	A	A	2	1,609	53	85,277	**80**	01/25/23	82	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 4	EBERNALDR	E BERNAL DR	30	ALPINE DR	MAIN ST	A	O	2	471	53	24,963	**80**	01/25/23	81	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	EROMIELN	E ROMIE LN	010	S MAIN ST	ALAMEDA AVE	A	A	2	2,809	44	123,596	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	EAGLECIR	EAGLE CIR	10	EAGLE DR	END	R	A	2	213	34	7,242	**80**	02/01/23	81	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 1	EAGLEDR	EAGLE DR	10	FALCON DR	COUGAR WAY	R	A	2	938	38	35,644	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 1	EAGLEDR	EAGLE DR	20	COUGAR WAY	EAGLE WAY	R	A	2	1,571	38	59,698	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 1	EAGLEDR	EAGLE DR	30	EAGLE WAY	BISON WAY	R	A	2	1,455	38	55,290	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 1	EAGLEWAY	EAGLE WAY	10	FREEDOM PKWY	EAGLE DR	R	A	2	170	39	6,630	**80**	02/01/23	81	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 1	ELKCIR	ELK CIR	10	ELK DR	END	R	A	2	341	33	11,266	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 1	ELKDR	ELK DR	15	FALCON DR	COUGAR DR	R	A	2	825	38	31,384	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 6	ELMSFORDCI	ELMSFORD CIR	10	FAULKNER ST	END	R	A	2	352	32	11,288	**80**	02/02/23	81	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	ELMSFORDWA	ELMSFORD WAY	10	DECLARATION ST	FAULKNER ST	R	A	2	385	32	12,321	**80**	02/02/23	81	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 1	FALCONDR	FALCON DR	010	E BORONDA RD	EAGLE DR	R	A	2	1,254	41	51,414	**80**	02/01/23	81	80-71	Good (90-71)	05/21/19	SLURRY SEAL
Dist 1	FALCONDR	FALCON DR	020	EAGLE DR	BISON WAY	R	A	2	440	33	14,520	**80**	02/01/23	81	80-71	Good (90-71)		

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	GEORGETOWN	GEORGETOWN WAY	15	CHARLESTOWN WAY	HARRINGTON CIR	R	A	2	1,638	32	52,417	**80**	02/02/23	81	80-71	Good (90-71)		
Dist 3	GREENFIELD	GREENFIELD ALY	030	E ALISAL ST	E SAN LUIS ST	R	P	2	670	16	10,720	**80**	01/26/23	80	80-71	Good (90-71)		
Dist 6	HUDSONWAY	HUDSON WAY	15	MANHATTAN DR	END	R	A	2	545	33	17,985	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	LINWOODDR	LINWOOD DR	030NB	E LAUREL DR	RAINIER DR	C	A	2	1,982	26	51,532	**80**	02/17/23	81	80-71	Good (90-71)	05/03/21	SLURRY SEAL
Dist 1	MADRONEDR	MADRONE DR	010	NOGAL DR	MADRONE WAY	R	A	2	660	33	21,780	**80**	02/01/23	81	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	MADRONEDR	MADRONE DR	020	MADRONE WAY	BUCKEYE WAY	R	A	2	700	37	25,900	**80**	02/01/23	81	80-71	Good (90-71)		
Dist 1	MADRONEDR	MADRONE DR	030	BUCKEYE WAY	WEST END	R	A	2	425	33	14,025	**80**	02/01/23	81	80-71	Good (90-71)		
Dist 6	MANHATTAND	MANHATTAN DR	10	BROADWAY DR	MCKINNON ST	R	A	2	877	37	32,449	**80**	08/15/23	81	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	PARTRIDGEW	PARTRIDGE WAY	10	FALCON DR	PARTRIDGE ST	R	A	2	210	37	7,770	**80**	02/01/23	81	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 1	ROCKROSEWA	ROCKROSE WAY	10	BUCKHORN DR	ROCKROSE ST	R	A	2	200	37	7,400	**80**	02/01/23	81	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	SAGECT	SAGE CT	15	CHAMISE CT (N)	CHAMISE CT (S)	R	A	2	1,656	34	56,304	**80**	02/01/23	81	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	SAGEWAY	SAGE WAY	10	SAGE CT	BUCKHORN DR	R	A	2	150	37	5,550	**80**	02/01/23	81	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 1	SAGUAROCIR	SAGUARO CIR	10	TUMBLEWEED DR	NE END	R	A	2	411	32	13,152	**80**	02/01/23	81	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 5	SHERMANDR	SHERMAN DR	15	LARKIN ST	END	R	A	2	1,727	37	63,899	**80**	08/15/23	80	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 4	STANYANST	STANYAN ST	10	GREENWICH WAY	SANSOME ST	R	A	2	680	32	21,760	**80**	08/15/23	80	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	SUMACWAY	SUMAC WAY	10	SAGE CT	CHAMISE DR	R	A	2	483	37	17,871	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 1	TAMARAKWAY	TAMARAK WAY	10	CHAMISE DR	BUCKHORN DR	R	A	2	494	32	15,828	**80**	02/01/23	81	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 1	TWNCRKWY	TWIN CREEKS WAY	10	TWIN CREEKS DR	BEACON HILL DR	R	A	2	177	33	5,841	**80**	02/02/23	81	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	070	W ACACIA ST	PALMA DR	A	A	4	1,141	60	68,460	**80**	01/24/23	82	80-71	Good (90-71)	10/01/20	SLURRY SEAL
Dist 1	WOLFCT	WOLF CT	10	EAGLE DR (W)	EAGLE DR (E)	R	A	2	1,079	34	36,686	**80**	02/01/23	81	80-71	Good (90-71)	05/16/19	SLURRY SEAL
Dist 1	YUCATANWAY	YUCATAN WAY	15	MAZATLAN ST	NOGAL DR	R	A	2	695	38	26,410	**80**	02/01/23	81	80-71	Good (90-71)		
Dist 1	ACAPULCOWA	ACAPULCO WAY	20	DURANGO	END	R	A	2	220	34	7,480	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 5	ALVARADODR	ALVARADO DR	15	SHERMAN DR	END	R	A	2	1,570	32	50,261	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	AMARILLOWA	AMARILLO WAY	020	RIDER AVE	PACIFIC AVE	R	A	2	720	32	23,040	**79**	02/01/23	80	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	BADGERWAY	BADGER WAY	15	COUGAR DR	WILLIAMS RD	R	A	2	681	38	25,878	**79**	02/01/23	80	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 1	BAJACIR	BAJA CIR	10	DURANGO ST	END	R	A	2	155	33	5,115	**79**	02/01/23	80	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 1	BERNARDOCI	BERNARDO CIR	10	BERNARDO AVE	END	R	A	2	336	32	10,772	**79**	02/03/23	80	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	BISONCIR	BISON CIR	10	BISON WAY	END	R	A	2	186	33	6,142	**79**	02/01/23	80	80-71	Good (90-71)	04/16/19	SLURRY SEAL
Dist 1	BISONWAY	BISON WAY	15	EAGLE DR	BUCKHORN DR	R	A	2	1,113	33	36,729	**79**	02/01/23	80	80-71	Good (90-71)	04/16/19	SLURRY SEAL
Dist 1	BUCKHORNDR	BUCKHORN DR	25	N SANBORN RD	FALCON RD	C	A	2	945	37	34,965	**79**	02/01/23	81	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 1	CACHUMACT	CACHUMA CT	10	GAVIOTA DR (W)	GAVIOTA DR (E)	R	A	2	989	34	33,626	**79**	02/03/23	80	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	CAPECODWAY	CAPE COD WAY	15	ROCKPORT WAY	CONSTITUTION BLVD	R	A	2	1,142	32	36,554	**79**	02/02/23	80	80-71	Good (90-71)	04/24/19	SLURRY SEAL
Dist 1	CHAMISECIR	CHAMISE CIR	10	CHAMISE CT	END	R	A	2	231	32	7,404	**79**	02/01/23	81	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 1	CHAMISEDR	CHAMISE DR	010	BUCKHORN DR	TAMARAK WAY	R	A	2	873	37	32,301	**79**	02/01/23	80	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 1	CHAMISEDR	CHAMISE DR	020	TAMARAK WAY	SAGE CT (S)	R	A	2	899	32	28,768	**79**	02/01/23	80	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 6	CHRISTENSE	CHRISTENSEN AVE	15	E ALVIN DR	JULIA AVE	R	A	2	1,888	38	71,744	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	COUGARWAY	COUGAR WAY	10	EAGLE DR	COUGAR DR	R	A	2	244	38	9,272	**79**	02/01/23	80	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 6	DECLARATIO	DECLARATION ST	10	BEACON HILL DR	NANTUCKET BLVD	R	A	2	1,488	37	55,056	**79**	02/02/23	80	80-71	Good (90-71)	04/26/19	SLURRY SEAL
Dist 1	DURANGOST	DURANGO ST	15	YUCATAN WAY	ACAPULCO WAY	R	A	2	695	38	26,410	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 2	EALISALST	E ALISAL ST	040	TAMPA ST	E MARKET ST	A	A	2	838	42	35,196	**79**	01/25/23	80	80-71	Good (90-71)	05/10/21	DEEP PATCH
Dist 6	ELIOTCIR	ELIOT CIR	10	LEWIS ST	END	R	A	2	140	56	7,840	**79**	02/03/23	80	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	FITZGERALD	FITZGERALD ST	20	HEMINGWAY DR	FAULKNER ST	R	A	2	831	37	30,747	**79**	02/03/23	80	80-71	Good (90-71)	04/24/19	SLURRY SEAL
Dist 3	FRONTST	FRONT ST	060WB	PCC START	PCC END	A	P	1	270	18	4,860	**79**	02/10/23	79	80-71	Good (90-71)		
Dist 1	GAVIOTADR	GAVIOTA DR	010	CACHUMA CT (W)	TORONA WAY	R	A	2	834	38	31,692	**79**	02/03/23	80	80-71	Good (90-71)		
Dist 6	HEMINGWAYD	HEMINGWAY DR	20	NANTUCKET BLVD	FITZGERALD RD	R	A	2	1,093	41	44,813	**79**	02/03/23	80	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 5	HOWECIR	HOWE CIR	10	HOWE DR	END	R	A	2	300	32	9,600	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	KITTERYST	KITTERY ST	15	BEACON HILL DR	FITZGERALD ST	R	A	2	961	32	30,753	**79**	02/02/23	80	80-71	Good (90-71)		
Dist 3	LODGELN	LODGE LN	10	E MARKET ST	E GABILAN ST	R	P	2	605	14	8,470	**79**	01/26/23	79	80-71	Good (90-71)		
Dist 3	LODGELN	LODGE LN	20	E GABILAN ST	E ALISAL ST	R	P	2	670	15	10,050	**79**	01/26/23	79	80-71	Good (90-71)		
Dist 1	MADRONEWAY	MADRONE WAY	10	MADRONE DR	RIDER AVE	C	A	2	155	37	5,735	**79**	03/16/23	80	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 4	MARYALDR	MARYAL DR	10	CHAPARRAL ST	END	R	A	2	154	30	4,641	**79**	02/17/23	80	80-71	Good (90-71)	01/01/01	SLURRY SEAL
Dist 1	MSSCHUDR	MASSACHUSETTS DR	010	RHODE ISLAND ST	VERMONT CIR	R	A	2	925	37	34,225	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 1	MSSCHUDR	MASSACHUSETTS DR	020	VERMONT CIR	END	R	A	2	480	33	15,840	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 4	MASSOLOCT	MASSOLO CT	15	VINCENT PL (W)	VINCENT PL (E)	R	A	2	1,235	32	39,522	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	MAZATLANST	MAZATLAN ST	15	YUCATAN WAY	END	R	A	2	1,085	38	41,230	**79**	02/01/23	80	80-71	Good (90-71)		
Dist 6	MCKINNONST	MCKINNON ST	50	E BORONDA RD	N END	R	A	2	1,138	37	42,106	**79**	10/05/23	79	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 1	MESCALCT	MESCAL CT	10	SAGUARO DR (N)	SAGUARO DR (S)	R	A	2	1,380	32	44,160	**79**	02/01/23	80	80-71	Good (90-71)	04/16/19	SLURRY SEAL
Dist 2	MONTEBELLA	MONTE BELLA BLVD	30	TUSCANY BLVD	WILLIAMS RD	C	A	2	894	41	36,654	**79**	03/15/23	80	80-71	Good (90-71)	06/29/17	SLURRY SEAL
Dist 1	MUSTANGCT	MUSTANG CT	15	BADGER WAY (W)	BADGER WAY (E)	R	A	2	1,258	33	41,514	**79**	02/01/23	80	80-71	Good (90-71)	04/15/19	SLURRY SEAL
Dist 5	NMAINST	N MAIN ST	020	COP 900' S/O RUSSEL RD	BORONDA RD	A	P	4	3,798	78	296,244	**79**	03/16/23	79	80-71	Good (90-71)	04/16/19	DEEP PATCH
Dist 1	NOGALDR	NOGAL DR	010	MADRONE DR	FREEDOM PKWY	R	A	2	1,197	37	44,289	**79**	02/01/23	80	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 6	OYSTERBAY1	OYSTER BAY CT	15	MANCHESTER DR (N)	MANCHESTER DR (S)	R	A	2	1,266	38	48,108	**79**	02/03/23	80	80-71	Good (90-71)		
Dist 1	PASEOGRAND	PASEO GRANDE	15	N SANBORN RD	GAVIOTA DR	R	A	2	2,083	38	79,182	**79**	02/03/23	80	80-71	Good (90-71)		
Dist 1	RAVENCT	RAVEN CT	10	COUGAR DR (N)	COUGAR DR (S)	R	A	2	1,212	33	39,996	**79**	02/01/23	80	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 6	REXCIR	REX CIR	10	WELLINGTON CT	END	R	A	2	135	37	4,995	**79**	02/02/23	80	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	ROCKPORTWA	ROCKPORT WAY	15	BEACON HILL DR	BOSTON ST	R	A	2	856	37	31,672	**79**	02/02/23	80	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 2	ROYDIAZST	ROY DIAZ ST	010	END	AIRPORT BLVD	C	A	2	2,082	62	129,084	**79**	01/17/23	81	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 6	SOMERSWOR1	SOMERSWORTH WAY	10	CABOT WAY	BOSTON ST	R	A	2	758	32	24,281	**79**	02/02/23	80	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 1	TECOPAWAY	TECOPA WAY	10	GAVIOTA DR	TORONA WAY	R	A	2	748	33	24,684	**79**	02/03/23	80	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	TORONAWAY	TORONA WAY	15	GAVIOTA DR	FREEDOM PKWY	C	A	2	400	38	15,200	**79**	02/03/23	80	80-71	Good (90-71)		
Dist 1	TUMBLEWEED	TUMBLEWEED DR	15	RIDER AVE	MESQUITE DR	R	A	2	1,284	37	47,508	**79**	02/01/23	80	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 5	VANBURENAV	VAN BUREN AVE	030	EISENHOWER ST	RUSSEL RD	C	A	2	1,255	42	52,710	**79**	08/15/23	79	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB040	S SANBORN RD	E ROMIE LN	A	A	2	1,076	36	38,743	**78**	01/19/23	80	80-71	Good (90-71)	05/27/22	CHIP SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB060	JOHNSON AVE	E ROMIE LN	A	A	2	262	36	9,460	**78**	01/19/23	80	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 1	ACAPULCOWA	ACAPULCO WAY	10	MAZATLAN ST	DURANGO ST	R	A	2	510	37	18,870	**78**	02/01/23	79	80-71	Good (90-71)		
Dist 6	BOSTONST	BOSTON ST	15	BEACON HILL DR	BENNINGTON CT	R	A	2	2,945	32	94,240	**78**	02/02/23	79	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	BUNKERHILL	BUNKER HILL WAY	15	CONSTITUTION BLVD	GEORGETOWN WAY	R	A	2	1,245	37	46,065	**78**	02/02/23	79	80-71	Good (90-71)		
Dist 6	BURLINGTON	BURLINGTON CIR	10	BURLINGTON DR	END	R	A	2	193	31	5,983	**78**	02/03/23	79	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	CACTUSCT	CACTUS CT	10	TUMBLEWEED DR (N)	TUMBLEWEED DR (S)	R	A	2	1,254	32	40,128	**78**	02/01/23	80	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 1	CAMARILLOC	CAMARILLO CT	10	MORENO DR (N)	MORENO DR (S)	R	A	2	1,000	33	33,000	**78**	02/03/23	79	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	CTTNWDWY	COTTONWOOD WAY	010	RIDER AVE	COTTONWOOD DR	R	A	2	429	37	15,873	**78**	02/01/23	79	80-71	Good (90-71)	04/18/19	SLURRY SEAL
Dist 6	DORSETWAY	DORSET WAY	10	BUCKINGHAM DR	LANCASHIRE DR	R	A	2	509	34	17,306	**78**	08/15/23	78	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	EALVINDR	E ALVIN DR	45	EL DORADO DR	MARIN AVE	A	A	4	1,515	62	93,930	**78**	01/25/23	79	80-71	Good (90-71)	04/30/21	SLURRY SEAL
Dist 4	EBERNALDR	E BERNAL DR	10	SHERWOOD DR	ROSARITA DR	A	P	4	866	54	46,764	**78**	01/25/23	79	80-71	Good (90-71)	02/04/19	DEEP PATCH
Dist 1	EBORONDARD	E BORONDA RD	100	RIDER AVE	MESQUITE DR	A	A	2	1,326	45	59,670	**78**	01/24/23	80	80-71	Good (90-71)	06/03/22	RUBBER
Dist 6	ESSEXCIR	ESSEX CIR	10	WIMBLEDON AVE	END	R	A	2	221	32	7,088	**78**	08/15/23	78	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	FAULKNERCI	FAULKNER CIR	10	LEWIS ST	END	R	A	2	83	66	5,478	**78**	02/03/23	79	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	FAULKNERST	FAULKNER ST	15	FITZGERALD ST	LEWIS ST	R	A	2	800	36	28,800	**78**	02/03/23	79	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 1	FREEDOMPKW	FREEDOM PKWY	020	BERNARDO AVE	ESTRELLA WAY	C	A	4	1,433	60	85,980	**78**	02/01/23	80	80-71	Good (90-71)	05/08/19	SLURRY SEAL
Dist 1	GAVIOTADR	GAVIOTA DR	020	TORONA WAY	TECOPA WAY	R	A	2	515	34	17,510	**78**	02/03/23	79	80-71	Good (90-71)		
Dist 3	GREENFIELD	GREENFIELD ALY	010	E MARKET ST	E GABILAN ST	R	P	2	470	32	15,040	**78**	01/26/23	78	80-71	Good (90-71)		
Dist 2	JOHNST	JOHN ST	110	S WOOD ST	S FILICE ST	A	A	4	1,481	58	85,898	**78**	01/18/23	79	80-71	Good (90-71)	06/11/19	DEEP PATCH
Dist 6	LEWISST	LEWIS ST	15	HEMINGWAY DR	FAULKNER CIR	R	A	2	875	37	32,375	**78**	02/03/23	79	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 6	LEXINGTOND	LEXINGTON DR	90	INDEPENDENCE BLVD	LITTLE RIVER DR	R	A	2	210	33	6,930	**78**	02/03/23	79	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 6	LITTLERIVE	LITTLE RIVER DR	15	MANCHESTER DR	END	R	A	2	2,604	38	98,952	**78**	02/03/23	79	80-71	Good (90-71)		
Dist 6	LONDONWAY	LONDON WAY	10	FAULKNER ST	LEWIS ST	R	A	2	1,026	32	32,839	**78**	02/03/23	79	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 2	MAYFAIRDR	MAYFAIR DR	15	S SANBORN RD	MAYFAIR DR	R	A	2	2,512	30	75,360	**78**	01/17/23	79	80-71	Good (90-71)		
Dist 6	MCKINNONST	MCKINNON ST	40	CHARDONNAY DR	E BORONDA RD	C	A	2	770	42	32,340	**78**	10/05/23	78	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 2	MONTEBELLA	MONTE BELLA BLVD	10	SCONBERG PKWY	SARDINA DR	C	A	2	1,256	46	57,776	**78**	03/15/23	79	80-71	Good (90-71)	06/29/17	SLURRY SEAL
Dist 2	MONTEBELLA	MONTE BELLA BLVD	20	SARDINA DR	TUSCANY BLVD	C	A	2	1,819	46	83,674	**78**	03/15/23	79	80-71	Good (90-71)	06/29/17	SLURRY SEAL
Dist 1	NSANBORNRD	N SANBORN RD	30	ANTIGUA AVE	DEL MONTE AVE	A	A	2	2,098	63	132,201	**78**	01/18/23	79	80-71	Good (90-71)	05/22/19	SLURRY SEAL
	NMAIN183	N. MAIN ST (SR-183)	050SB	START PCC BRIDGE	END PCC BRIDGE	NCR	P	2	525	25	13,125	**78**	03/17/23	78	80-71	Good (90-71)		
Dist 6	NATIVIDADR	NATIVIDAD RD	060NB	EMERALD WAY	ARCADIA WAY	A	A	3	849	36	30,564	**78**	01/24/23	79	80-71	Good (90-71)	05/24/19	SLURRY SEAL
Dist 6	NATIVIDADR	NATIVIDAD RD	SB110	EMERALD WAY	LOS COCHES AVE	A	O	3	1,745	36	62,820	**78**	01/24/23	79	80-71	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 1	PARTRIDGES	PARTRIDGE ST	15	FALCON DR	END	R	A	2	831	32	26,592	**78**	02/01/23	79	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 1	RIDERAVE	RIDER AVE	035	FREEDOM PKWY	E BORONDA RD	C	A	2	1,975	41	80,975	**78**	02/01/23	80	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 3	ROSSICIR	ROSSI CIR	10	W ROSSI ST	END	R	A	2	463	42	19,446	**78**	03/02/23	79	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 1	SAGUARODR	SAGUARO DR	15	BUCKHORN DR	TUMBLEWEED DR	R	A	2	817	37	30,229	**78**	02/01/23	79	80-71	Good (90-71)	04/22/19	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	SOMERSWORT	SOMERSWORTH CIR	10	SOMERSWORTH WAY	END	R	A	2	368	32	11,791	**78**	02/02/23	79	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 1	TWNCRKCIR	TWIN CREEKS CIR	10	TWIN CREEKS DR	END	R	A	2	420	34	14,280	**78**	02/02/23	79	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	030	CHURCH ST	RIKER ST	A	A	4	958	60	57,494	**78**	01/24/23	80	80-71	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB060	JOHNSON AVE	LOS PALOS DR	A	O	2	1,269	36	45,684	**77**	01/19/23	78	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 6	BEACONHILL	BEACON HILL CIR	10	BEACON HILL DR	SW END	R	A	2	180	32	5,791	**77**	01/24/23	79	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	BEACONHIL1	BEACON HILL DR	30	BOSTON ST	CONSTITUTION BLVD	C	A	2	1,050	42	44,100	**77**	01/24/23	79	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	CABOTWAY	CABOT WAY	15	BEACON HILL DR	BERKSHIRE WAY	R	A	2	766	37	28,342	**77**	02/02/23	78	80-71	Good (90-71)	04/24/19	SLURRY SEAL
Dist 6	CANTERBURY	CANTERBURY ST	15	LEXINGTON DR	END	R	A	2	1,215	32	38,883	**77**	02/03/23	78	80-71	Good (90-71)		
Dist 6	CASTLETONS	CASTLETON ST	15	LITTLE RIVER DR	END	R	A	2	729	37	26,973	**77**	02/03/23	78	80-71	Good (90-71)		
Dist 1	CAYUCOSCIR	CAYUCOS CIR	10	MORENO DR	END	R	A	2	234	33	7,722	**77**	02/03/23	78	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	DECLARATIO	DECLARATION ST	100	NANTUCKET BLVD	DE CUNHA CT	R	A	2	690	37	25,530	**77**	02/02/23	78	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 2	EMARKETST	E MARKET ST	090	TOWT ST	KENNETH AVE	A	A	4	1,732	44	76,208	**77**	01/26/23	78	80-71	Good (90-71)		
Dist 1	ESTRELLAWA	ESTRELLA WAY	15	FREEDOM PKWY	PASEO GRANDE	R	A	2	920	37	34,045	**77**	02/03/23	78	80-71	Good (90-71)		
Dist 1	FOXGLENWAY	FOX GLEN WAY	15	COBBLESTONE ST (W)	COBBLESTONE ST (E)	R	A	2	870	34	29,580	**77**	02/02/23	78	80-71	Good (90-71)		
Dist 1	FRESAPL	FRESA PL	10	RANCHERO DR	END	R	A	2	157	32	5,034	**77**	02/02/23	78	80-71	Good (90-71)	01/01/08	CAPE SEAL
Dist 3	FRONTST	FRONT ST	030NB	PCC START	E MARKET ST	A	P	2	422	26	10,972	**77**	02/10/23	78	80-71	Good (90-71)		
Dist 4&5	GENEVAWAY	GENEVA WAY	10	POTRERO WAY	VICTOR ST	R	A	2	680	32	21,765	**77**	03/02/23	78	80-71	Good (90-71)	05/10/19	SLURRY SEAL
Dist 6	GREATISLAN	GREAT ISLAND ST	15	BEACON HILL DR	CRESTVIEW ST	R	A	2	1,186	32	37,979	**77**	02/02/23	78	80-71	Good (90-71)		
Dist 6	HOLMESCIR	HOLMES CIR	10	HEMINGWAY DR	END	R	A	2	109	32	3,508	**77**	02/03/23	78	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 2	JOHNST	JOHN ST	130	S SANBORN RD	MCGOWAN DR	A	A	4	1,251	58	72,558	**77**	01/18/23	78	80-71	Good (90-71)	05/20/19	SLURRY SEAL
Dist 1	LACUESTACT	LA CUESTA CT	10	ANTIGUA AVE (N)	ANTIGUA AVE (S)	R	A	2	1,375	34	46,750	**77**	02/03/23	78	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	MANCHESTE1	MANCHESTER DR	10	CASTLETON ST	CONSTITUTION BLVD	R	A	2	813	42	34,146	**77**	02/03/23	78	80-71	Good (90-71)		
Dist 1	MSSCHUWAY	MASSACHUSETTS WAY	10	CONSTITUTION BLVD	MASSACHUSETTS DR	R	A	2	145	37	5,365	**77**	02/01/23	78	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 4	MILLWAY	MILL WAY	10	SANSOME ST	GREENBRIAR WAY	R	A	2	321	32	10,273	**77**	08/15/23	77	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	MORENOCIR	MORENO CIR	10	PASEO GRANDE	END	R	A	2	187	33	6,171	**77**	02/03/23	78	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	NSANBORNRD	N SANBORN RD	20	FREEDOM PKWY	ANTIGUA AVE	A	A	2	1,073	77	82,663	**77**	01/18/23	79	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 4&6	NATIVIDADR	NATIVIDAD RD	020NB	S LAUREL DR	RAINIER DR	A	P	3	2,105	36	75,780	**77**	01/24/23	78	80-71	Good (90-71)		
Dist 6	NATIVIDADR	NATIVIDAD RD	SB090	E BORONDA RD	ARCADIA WAY	A	O	3	775	60	46,500	**77**	01/24/23	78	80-71	Good (90-71)	05/24/19	SLURRY SEAL
Dist 1	NWHMPSHCT	NEW HAMPSHIRE CT	15	RHODE ISLAND ST	MASSACHUSETTS DR	R	A	2	1,511	37	55,907	**77**	02/01/23	78	80-71	Good (90-71)		
Dist 6	OYSTERBAYC	OYSTER BAY CIR	10	OYSTER BAY CT	END	R	A	2	135	35	4,725	**77**	02/03/23	78	80-71	Good (90-71)	01/01/02	REJUVENATION OIL
Dist 6	PEACEFULCO	PEACEFUL COVE WAY	10	MANCHESTER DR	LITTLE RIVER DR	R	A	2	401	32	12,848	**77**	03/16/23	78	80-71	Good (90-71)		
Dist 6	PENNSYLVAN	PENNSYLVANIA DR	15	MCKINNON ST	END	R	A	2	1,601	41	65,641	**77**	08/15/23	78	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	RHDISLDST	RHODE ISLAND ST	010	CONSTITUTION BLVD	RHODE ISLAND CIR	R	A	2	576	37	21,312	**77**	02/01/23	78	80-71	Good (90-71)		
Dist 4	SANTACLARA	SANTA CLARA AVE	10	N FREEWAY OFF RAMP	END	R	O	2	369	24	8,856	**77**	03/01/23	78	80-71	Good (90-71)	07/16/21	SLURRY SEAL
Dist 4	SUTROCIR	SUTRO CIR	10	SLOAT DR	END	R	A	2	245	32	7,846	**77**	03/02/23	78	80-71	Good (90-71)	05/10/19	SLURRY SEAL
Dist 6	SUTTONWAY	SUTTON WAY	15	DELANCEY DR (W)	DELANCEY DR (N)	R	A	2	916	33	30,228	**77**	08/15/23	78	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	TAMPICOAVE	TAMPICO AVE	100	RAINIER DR	END	R	A	2	461	32	14,776	**77**	02/09/23	78	80-71	Good (90-71)	01/01/01	SLURRY SEAL
Dist 2&4	TOWTST	TOWT ST	070	E MARKET ST	E ALISAL ST	C	A	2	1,608	38	61,104	**77**	02/08/23	78	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 2	TUSCANYBLV	TUSCANY BLVD	15	MONTE BELLA BLVD	FREEDOM PKWY	R	A	2	1,428	42	59,976	**77**	03/15/23	78	80-71	Good (90-71)		
Dist 1	VERMONTCIR	VERMONT CIR	10	MASSACHUSETTS DR	END	R	A	2	390	33	12,870	**77**	02/01/23	78	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 3	WBLANCORD	W BLANCO RD	EB040	PADRE DR	S MAIN ST	A	O	2	649	32	20,780	**77**	01/20/23	78	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	ABBOTTST	ABBOTT ST	NB070	LOS PALOS DR	ALAMEDA AVE	A	O	2	1,316	36	47,376	**76**	01/19/23	77	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB030	MAPLE ST	ALAMEDA AVE	A	O	2	892	36	32,112	**76**	01/19/23	78	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB040	ALAMEDA AVE	LOS PALOS DR	A	O	2	1,316	36	47,376	**76**	01/19/23	77	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB070	E ROMIE LN	S SANBORN RD	A	A	2	1,076	36	38,743	**76**	01/19/23	78	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 6	BEACONHIL1	BEACON HILL DR	10	CONSTITUTION BLVD	ROCKPORT WAY	C	A	2	1,033	42	43,386	**76**	01/24/23	78	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 6	BEACONHIL1	BEACON HILL DR	20	ROCKPORT WAY	BOSTON ST	C	A	2	1,528	42	64,176	**76**	01/24/23	78	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 1	BEACONHIL	BEACON HILL DR	20	CONSTITUTION BLVD	END	R	A	2	570	42	23,940	**76**	01/24/23	78	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 1	BERMUDAWAY	BERMUDA WAY	10	RIDER AVE	PACIFIC AVE	R	A	2	720	32	23,055	**76**	02/02/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	BERNARDOAV	BERNARDO AVE	15	LA MANCHA WAY	FREEDOM PKWY	R	A	2	1,500	37	55,500	**76**	02/03/23	77	80-71	Good (90-71)		
Dist 1	BUCKHORNDR	BUCKHORN DR	15	RIDER AVE	N SANBORN RD	C	A	2	1,857	37	68,709	**76**	02/01/23	78	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 6	CHARLESTOW	CHARLESTOWN WAY	15	BEACON HILL DR	BUNKER HILL WAY	R	A	2	552	37	20,424	**76**	02/02/23	77	80-71	Good (90-71)		
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB30	BEACON HILL DR (S)	LAS CASITAS DR	A	A	2	1,002	32	32,095	**76**	01/20/23	78	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1	CONSTITUTI	CONSTITUTION BLVD	NB70	RHODE ISLAND ST	E BORONDA RD	A	A	2	640	34	21,760	**76**	01/20/23	77	80-71	Good (90-71)	05/14/19	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	CRESTVIEWS	CRESTVIEW ST	15	KITTERY ST	END	R	A	2	1,208	33	39,864	**76**	02/02/23	77	80-71	Good (90-71)		
Dist 1	DURANGOCIR	DURANGO CIR	10	DURANGO ST	END	R	A	2	150	33	4,950	**76**	02/01/23	77	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 3&4	EALISALST	E ALISAL ST	170EB	END PCC	KERN ST	A	A	2	1,865	28	52,220	**76**	08/15/23	77	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	ESTRELLACT	ESTRELLA CT	10	ESTRELLA WAY	END	R	A	2	205	37	7,585	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	HANCOCKCIR	HANCOCK CIR	10	HANCOCK ST	END	R	A	2	305	31	9,455	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	HUGHESWAY	HUGHES WAY	10	CONSTITUTION BLVD	FOX GLEN WAY	R	A	2	317	38	12,046	**76**	02/02/23	77	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 6	LEWISCIR	LEWIS CIR	10	LEWIS ST	END	R	A	2	235	32	7,520	**76**	02/03/23	77	80-71	Good (90-71)	05/09/19	SLURRY SEAL
Dist 1	MAZATLANWA	MAZATLAN WAY	10	MAZATLAN ST	RIDER AVE	R	A	2	158	38	6,004	**76**	02/01/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	MILTONWAY	MILTON WAY	10	CABOT WAY	BOSTON ST	R	A	2	482	32	15,435	**76**	02/02/23	77	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 1	MORENODR	MORENO DR	010	PASEO GRANDE	CAMARILLO CT	C	A	2	975	38	37,050	**76**	02/03/23	78	80-71	Good (90-71)		
Dist 1	MORENOWAY	MORENO WAY	10	TOWT ST	MORENO DR	C	A	2	145	38	5,510	**76**	03/17/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	NSANBORNRD	N SANBORN RD	10	E BORONDA RD	FREEDOM PKWY	A	A	2	1,937	64	123,980	**76**	01/18/23	78	80-71	Good (90-71)	05/22/19	SLURRY SEAL
Dist 3	NACIONALCT	NACIONAL CT	10	CLARK ST (N)	CLARK ST (S)	R	A	2	1,884	38	71,592	**76**	03/16/23	77	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 6	NATIVIDADR	NATIVIDAD RD	050NB	LOS COCHES AVE	EMERALD WAY	A	A	3	1,753	36	63,108	**76**	01/24/23	78	80-71	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 6	NATIVIDADR	NATIVIDAD RD	SB100	ARCADIA WAY	EMERALD WAY	A	O	3	849	36	30,564	**76**	01/24/23	78	80-71	Good (90-71)	05/24/19	SLURRY SEAL
Dist 1	OSOCT	OSO CT	10	ESTRELLA WAY (N)	ESTRELLA WAY (S)	R	A	2	1,292	32	41,344	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	PARKROW	PARK ROW	20	W ACACIA ST	END	R	A	2	253	32	8,097	**76**	03/19/19	83	80-71	Good (90-71)	03/19/19	SHALLOW PATCH
Dist 6	PROVINCET1	PROVINCETOWN DR	10	LEXINGTON DR (S)	LEXINGTON DR (N)	R	A	2	1,484	32	47,488	**76**	02/03/23	77	80-71	Good (90-71)		
Dist 6	PROVINCET1	PROVINCETOWN DR	20	LEXINGTON DR	INDEPENDENCE BLVD	R	A	2	422	37	15,614	**76**	02/03/23	77	80-71	Good (90-71)		
Dist 3	QUAILRUNCI	QUAIL RUN CIR	10	W ROSSI ST	END	R	A	2	630	42	26,460	**76**	03/02/23	77	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 1	RHDISLDST	RHODE ISLAND ST	020	RHODE ISLAND CIR	END	R	A	2	235	33	7,755	**76**	02/01/23	77	80-71	Good (90-71)		
Dist 6	RIVERTONWA	RIVERTON WAY	10	HARTFORD ST	COVENTRY ST	R	A	2	636	32	20,382	**76**	02/04/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	SANFELIPES	SAN FELIPE ST	10	SANTA FE WAY	C.O.P.	R	A	2	300	32	9,600	**76**	01/23/23	77	80-71	Good (90-71)	06/07/19	SHALLOW PATCH
Dist 3	SANGABRIEL	SAN GABRIEL DR	10	CENTRAL AVE	END	R	A	2	210	38	7,980	**76**	01/25/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 4	STOCKTONST	STOCKTON ST	15	POWELL ST	W ROSSI ST	R	A	2	1,245	34	42,330	**76**	08/15/23	76	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	SUTTONCIR	SUTTON CIR	10	SUTTON WAY	END	R	A	2	190	31	5,890	**76**	08/15/23	77	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	TWNCRKDR	TWIN CREEKS DR	15	NE END	COP @ SHOPPING CENTER	R	A	2	680	34	23,120	**76**	02/02/23	77	80-71	Good (90-71)		
Dist 6	TYNANWAY	TYNAN WAY	10	WESTMINSTER DR	PLACER WAY	R	A	2	770	32	24,668	**76**	02/17/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	VERACRUZCI	VERA CRUZ CIR	10	ANTIGUA AVE	END	R	A	2	183	34	6,222	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	WBLANCORD	W BLANCO RD	EB030	RIKER ST	PADRE DR	A	O	2	1,250	30	37,500	**76**	01/20/23	78	80-71	Good (90-71)	06/03/22	RUBBER
Dist 6	WOODBURYCI	WOODBURY CIR	10	CANTERBURY ST	END	R	A	2	155	32	4,960	**76**	02/03/23	77	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 2	2NDAVE	2ND AVE	110	E MARKET ST	TOWT ST	R	A	2	1,200	37	44,400	**75**	03/13/23	76	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB080	ALAMEDA AVE	MAPLE ST	A	O	2	892	36	32,112	**75**	01/19/23	76	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB050	LOS PALOS DR	JOHNSON AVE	A	O	2	1,269	36	45,684	**75**	01/19/23	76	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 1	ANTIGUACIR	ANTIGUA CIR	10	ANTIGUA AVE	END	R	A	2	185	34	6,290	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 4	ARGUELLOCI	ARGUELLO CIR	10	ARGUELLO DR	END	R	A	2	180	34	6,120	**75**	02/09/23	76	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 6	ATTLEBURYC	ATTLEBURY CIR	10	CANTERBURY ST	END	R	A	2	292	32	9,350	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	BERKSHIREW	BERKSHIRE WAY	15	CAPE COD WAY	BOSTON ST	R	A	2	701	32	22,432	**75**	02/02/23	76	80-71	Good (90-71)	04/17/19	SLURRY SEAL
Dist 6	BURLINGTO1	BURLINGTON DR	15	PROVINCETOWN DR	END	R	A	2	1,015	37	37,555	**75**	02/03/23	76	80-71	Good (90-71)		
Dist 1	CANCUNCIR	CANCUN CIR	10	BERNARDO AVE	END	R	A	2	145	33	4,785	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	CARDINAWAY	CARDINA WAY	10	BERNARDO AVE	PALMERA AVE	R	A	2	440	34	14,985	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	CORTINAWAY	CORTINA WAY	10	BERNARDO AVE	PALMERA AVE	R	A	2	593	37	21,941	**75**	02/03/23	76	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	DANBURYST	DANBURY ST	15	HARTFORD ST	INDEPENDENCE BLVD	R	A	2	751	32	24,060	**75**	02/04/23	76	80-71	Good (90-71)		
Dist 1	DECUNHACT	DE CUNHA CT	15	DECLARATION ST (N)	DECLARATION ST (S)	R	A	2	2,009	32	64,288	**75**	02/02/23	76	80-71	Good (90-71)	08/07/19	DEEP PATCH
Dist 3	DICKENSDR	DICKENS DR	20	COLERIDGE DR	CHAUCER DR	R	A	2	700	32	22,400	**75**	01/23/23	76	80-71	Good (90-71)	10/25/19	SEAL CRACKS
Dist 3&4	EALISALST	E ALISAL ST	110WB	KERN ST	START PCC W/O PRADER ST	A	A	2	1,865	28	52,220	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	130EB	CONSTITUTION BLVD	RANCH VIEW LN/COUNTY FACILITY	A	A	2	1,698	30	50,940	**75**	01/19/23	77	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	140WB	ST EDWARDS AVE	RANCH VIEW LN/COUNTY FACILITY	A	A	2	2,305	35	80,675	**75**	01/19/23	77	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	150EB	ST EDWARDS AVE	N SANBORN RD	A	A	2	1,390	35	48,650	**75**	01/19/23	77	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 4	ELLISCIR	ELLIS CIR	10	FULTON WAY	END	R	A	2	214	32	6,865	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	FREEDOMPKW	FREEDOM PKWY	010	CONSTITUTION BLVD	BERNARDO AVE	C	A	4	3,212	60	192,720	**75**	02/01/23	77	80-71	Good (90-71)	05/08/19	SLURRY SEAL
Dist 1	FREEDOMPKW	FREEDOM PKWY	030	ESTRELLA WAY	TOWT ST	C	A	4	510	60	30,600	**75**	02/01/23	77	80-71	Good (90-71)	05/08/19	SLURRY SEAL
Dist 2	FREEDOMPKW	FREEDOM PKWY	050	WILLIAMS RD	TUSCANY BLVD	C	A	4	967	41	39,647	**75**	02/01/23	77	80-71	Good (90-71)		
Dist 4	FULTONWAY	FULTON WAY	15	POWELL ST	STOCKSTON ST	R	A	2	765	32	24,511	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	GONZALESAL	GONZALES ALY	20	E ALISAL ST	E SAN LUIS ST	R	P	2	625	15	9,375	**75**	03/16/23	75	80-71	Good (90-71)		
Dist 6	HAMPTONST	HAMPTON ST	15	HARROD WAY	WESTMINSTER DR	R	A	2	1,212	32	38,813	**75**	02/17/23	76	80-71	Good (90-71)		
Dist 4	HYDECIR	HYDE CIR	10	HYDE ST	END	R	A	2	180	32	5,760	**75**	02/09/23	76	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 2	JOHNST	JOHN ST	140	MCGOWAN DR	E ALISAL ST	A	A	4	1,433	62	88,846	**75**	01/18/23	76	80-71	Good (90-71)	05/20/19	SLURRY SEAL
Dist 6	KENSINGTON	KENSINGTON WAY	15	BUNKER HILL WAY	END	R	A	2	478	37	17,686	**75**	02/02/23	76	80-71	Good (90-71)		
Dist 6	KENTCIR	KENT CIR	10	KENT ST	END	R	A	2	155	34	5,270	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	KENTST	KENT ST	10	KLAMATH DR	KENT CIR	R	A	2	734	37	27,158	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	KENTST	KENT ST	20	KENT CIR	ARCADIA WAY	R	A	2	367	38	13,946	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	LAMANCHAWA	LA MANCHA WAY	15	BERNARDO AVE	PALMERA AVE	R	A	2	566	37	20,956	**75**	02/03/23	76	80-71	Good (90-71)		
Dist 6	LANCASHIR1	LANCASHIRE DR	30	LANCASHIRE CIR	CASCADE WAY	R	A	2	207	32	6,624	**75**	08/15/23	75	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	LONGFELLO1	LONGFELLOW DR	10	BRADBURY ST	HEMINGWAY DR	R	A	2	322	22	7,084	**75**	02/02/23	76	80-71	Good (90-71)	01/01/11	SLURRY SEAL
Dist 6	MCKINNONST	MCKINNON ST	20	WESTMINSTER DR	HARDEN PKWY	C	A	2	866	42	36,372	**75**	10/05/23	75	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 4	NATIVIDADR	NATIVIDAD RD	010	SHERWOOD DR	E LAUREL DR	A	P	2	2,141	64	137,024	**75**	01/24/23	76	80-71	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 6	NATIVIDADR	NATIVIDAD RD	040NB	E ALVIN DR	LOS COCHES AVE	A	A	3	1,803	36	64,908	**75**	01/24/23	76	80-71	Good (90-71)	05/24/19	SHALLOW PATCH
Dist 3	ORINDAWAY	ORINDA WAY	10	KENTFIELD DR	LOYOLA DR	R	A	2	633	32	20,271	**75**	01/24/23	76	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 1	PALMERAAVE	PALMERA AVE	15	LA MANCHA WAY	CORTINA WAY	R	A	2	1,345	37	49,765	**75**	02/03/23	76	80-71	Good (90-71)		
Dist 4&5	POTREROWAY	POTRERO WAY	10	SLOAT DR	GENEVA WAY	R	A	2	201	32	6,432	**75**	02/09/23	77	80-71	Good (90-71)	05/13/19	SLURRY SEAL
Dist 5	POTREROWAY	POTRERO WAY	20	GENEVA WAY	VICTOR ST	R	A	2	655	32	20,960	**75**	02/09/23	76	80-71	Good (90-71)	05/13/19	SLURRY SEAL
Dist 6	ROGGERD	ROGGE RD	020	2725' W/O NATIVIDAD RD (COP)	CITY LIMITS	MiA	A	2	1,680	38	63,840	**75**	03/03/23	76	80-71	Good (90-71)		
Dist 4	SHERWOODDR	SHERWOOD DR	060	NATIVIDAD RD	E BERNAL DR	A	P	4	278	64	17,828	**75**	02/10/23	76	80-71	Good (90-71)		
Dist 6	STONYBROO1	STONY BROOK DR	10	LITTLE RIVER DR	STONY BROOK CIR	R	A	2	905	38	34,390	**75**	02/03/23	76	80-71	Good (90-71)		
Dist 2	VANDENBERG	VANDENBERG ST	10	LA GUARDIA ST	MOFFETT ST	R	A	2	699	41	28,659	**75**	01/17/23	76	80-71	Good (90-71)	01/01/11	SLURRY SEAL
Dist 3	WALISALST	W ALISAL ST	060	COLLEGE DR	W ACACIA ST	A	A	4	885	60	53,100	**75**	01/24/23	77	80-71	Good (90-71)	10/01/20	SLURRY SEAL
Dist 3	WBLANCORD	W BLANCO RD	EB010	LUTHER WAY	LOS OLIVOS DR	A	O	2	1,383	30	41,490	**75**	01/20/23	77	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	EB020	LOS OLIVOS DR	RIKER ST	A	O	2	1,431	30	42,930	**75**	01/20/23	77	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	WB040	LOS OLIVOS DR	LUTHER WAY	A	A	2	1,388	30	41,640	**75**	01/20/23	77	80-71	Good (90-71)	06/03/22	RUBBER
Dist 1	WILLIAMSRD	WILLIAMS RD	060	FREEDOM PKWY	E BORONDA RD	C	A	3	2,133	57	121,581	**75**	10/05/23	75	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 3	ABBOTTST	ABBOTT ST	NB050	E ROMIE LN	JOHNSON AVE	A	A	2	262	36	9,460	**74**	01/19/23	76	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 6	ARCADIAWAY	ARCADIA WAY	10	EL DORADO DR	COP	C	A	2	590	42	24,780	**74**	08/15/23	74	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BRADBURYST	BRADBURY ST	10	END	FITZGERALD ST	R	A	2	2,003	37	74,111	**74**	02/03/23	75	80-71	Good (90-71)		
Dist 6	CHESHIREWA	CHESHIRE WAY	10	BENNINGTON CT	BEACON HILL DR	R	A	2	249	37	9,213	**74**	02/02/23	75	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	COBBLESTON	COBBLESTONE ST	010	BEACON HILL DR	START ONEWAY LOOP	R	A	2	1,290	34	43,860	**74**	02/02/23	75	80-71	Good (90-71)		
Dist 1	CONSTITUTI	CONSTITUTION BLVD	SB10	E BORONDA RD	NANTUCKET BLVD	A	A	2	640	34	21,760	**74**	01/20/23	76	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB60	BEACON HILL DR (S)	INDEPENDENCE BLVD	A	A	2	1,729	32	55,328	**74**	01/20/23	75	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 6	DERBYWAY	DERBY WAY	10	WESTMINSTER DR	HAMPTON ST	R	A	2	258	37	9,546	**74**	02/17/23	75	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	DEVONSHIRE	DEVONSHIRE WAY	10	WESTMINSTER DR	ERCIA ST	R	A	2	1,068	32	34,181	**74**	02/17/23	75	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	150WB	N SANBORN RD	ST EDWARDS AVE	A	A	2	1,383	30	41,490	**74**	01/19/23	75	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 6	FITZGERALD	FITZGERALD ST	10	END	HEMINGWAY DR	R	A	2	666	37	24,642	**74**	02/03/23	75	80-71	Good (90-71)		
Dist 5	FLINTCIR	FLINT CIR	10	LARKIN ST	END	R	A	2	125	32	4,000	**74**	08/15/23	74	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	FRONTST	FRONT ST	030SB	E MARKET ST	END OF PCC	A	P	2	367	30	11,010	**74**	02/10/23	75	80-71	Good (90-71)		
Dist 6	GLENFALLSC	GLEN FALLS CIR	10	STONY BROOK DR	END	R	A	2	441	32	14,122	**74**	02/03/23	75	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 6	HARRINGTON	HARRINGTON CIR	15	BEACON HILL DR	END	R	A	2	534	38	20,292	**74**	02/02/23	75	80-71	Good (90-71)		
Dist 6	JULIAAVE	JULIA AVE	10	WHEELER DR	CHRISTENSEN AVE	R	A	2	661	32	21,164	**74**	08/15/23	74	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	LAMANCHACI	LA MANCHA CIR	10	LA MANCHA WAY	END	R	A	2	219	34	7,448	**74**	02/03/23	75	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 4	LAPOSADADR	LA POSADA DR	15	END (N)	END (S)	R	A	2	473	25	11,842	**74**	02/17/23	75	80-71	Good (90-71)		
Dist 6	MEREDITHCI	MEREDITH CIR	10	BEACON HILL DR	END	R	A	2	235	32	7,520	**74**	02/02/23	76	80-71	Good (90-71)	04/25/19	SLURRY SEAL
Dist 1	MESQUITEDR	MESQUITE DR	15	E BORONDA RD	BUCKHORN DR	C	A	2	1,085	37	40,152	**74**	02/01/23	76	80-71	Good (90-71)	04/22/19	SLURRY SEAL
Dist 5	NDAVISRD	N DAVIS RD	160SB	W LAUREL DR	SLOAT DR	A	A	2	3,026	32	96,832	**74**	10/05/23	74	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 4&6	NATIVIDADR	NATIVIDAD RD	SB140	RAINIER DR	S LAUREL DR	A	P	3	2,105	36	75,780	**74**	01/24/23	75	80-71	Good (90-71)		
Dist 1	NEWCASTLED	NEWCASTLE DR	15	NANTUCKET BLVD	ROCKHAVEN CT	R	A	2	762	31	23,626	**74**	02/02/23	75	80-71	Good (90-71)		
Dist 1	PACANACIR	PACANA CIR	10	NOGAL DR	END	R	A	2	160	31	4,960	**74**	02/01/23	75	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 3	PALOALTOWA	PALO ALTO WAY	10	KENTFIELD DR	LOYOLA DR	R	A	2	634	32	20,291	**74**	01/24/23	75	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 4	SHERWOODDR	SHERWOOD DR	050	E BERNAL DR EB	185 Ft S/O SHERWOOD PL (PCC EN	A	P	4	1,814	57	103,398	**74**	02/10/23	75	80-71	Good (90-71)		
Dist 6	STONYBROO1	STONY BROOK DR	20	STONY BROOK CIR	CASTLETON ST	R	A	2	779	38	29,602	**74**	02/03/23	75	80-71	Good (90-71)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	WBLANCORD	W BLANCO RD	WB020	PADRE DR	RIKER ST	A	A	2	1,233	30	36,990	**74**	01/20/23	76	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	WBLANCORD	W BLANCO RD	WB030	RIKER ST	LOS OLIVOS DR	A	A	2	1,443	30	43,290	**74**	01/20/23	76	80-71	Good (90-71)	06/03/22	RUBBER
Dist 3	ABBOTTST	ABBOTT ST	NB090	MAPLE ST	JOHN ST	A	A	2	771	36	27,756	**73**	01/19/23	75	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 1	ACOSTAPLZ	ACOSTA PLZ	80	GARNER AVE	END	R	A	2	895	41	36,695	**73**	02/02/23	74	80-71	Good (90-71)	01/01/08	CAPE SEAL
Dist 3	ALAMEDAAVE	ALAMEDA AVE	035	E ROMIE LN	SAN MIGUEL AVE	C	A	2	1,377	32	44,064	**73**	01/20/23	75	80-71	Good (90-71)		
Dist 6	BENNINGTON	BENNINGTON CT	15	BOSTON ST (N)	BOSTON ST (S)	R	A	2	856	34	29,104	**73**	02/02/23	74	80-71	Good (90-71)		
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB20	INDEPENDENCE BLVD	BEACON HILL DR	A	A	2	1,728	32	55,314	**73**	01/20/23	75	80-71	Good (90-71)	05/17/19	DEEP PATCH
Dist 6	COVENTRYST	COVENTRY ST	10	BARRICADE (S)	N END	R	A	2	2,130	38	80,940	**73**	02/04/23	74	80-71	Good (90-71)		
Dist 6	CRESTVIEWW	CRESTVIEW WAY	10	SNUG HARBOR ST	CRESTVIEW ST	R	A	2	233	32	7,456	**73**	02/02/23	74	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 4&6	ELAURELDR	E LAUREL DR	120EB	NATIVIDAD RD	CONSTITUTION BLVD	A	A	2	1,907	35	66,745	**73**	01/19/23	75	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 4	EMARKETST	E MARKET ST	060	KERN ST	CARR AVE	A	A	4	1,367	62	84,754	**73**	01/26/23	75	80-71	Good (90-71)		
Dist 4	EMARKETST	E MARKET ST	070	CARR AVE	N SANBORN RD	A	A	4	2,470	64	158,080	**73**	01/26/23	74	80-71	Good (90-71)	10/01/10	RECONSTRUCT STRUCTURE (AC)
Dist 4	EROSSIST	E ROSSI ST	15	N MAIN ST	SHERWOOD DR	A	A	2	1,137	58	65,946	**73**	01/20/23	75	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 3	FRONTST	FRONT ST	010EB	START PCC @ E MARKET ST	END PCC @ FRONT ST	A	P	2	404	20	8,080	**73**	02/10/23	74	80-71	Good (90-71)		
Dist 4	GOUGHWAY	GOUGH WAY	10	POWELL ST	VICTOR ST	R	A	2	221	37	8,212	**73**	03/02/23	74	80-71	Good (90-71)	01/01/14	SLURRY SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	WB030	MCKINNON ST	BROADWAY DR	C	A	2	1,156	28	32,368	**73**	10/05/23	73	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 2	JOHNST	JOHN ST	120	S FILICE ST	S SANBORN RD	A	A	4	981	58	56,898	**73**	01/18/23	75	80-71	Good (90-71)	05/20/19	SLURRY SEAL
Dist 3	KENTFIELDD	KENTFIELD DR	25	LOYOLA DR	SAN JACINTO DR	R	A	2	2,016	32	64,541	**73**	01/24/23	74	80-71	Good (90-71)		
Dist 6	LAFAYETTEC	LAFAYETTE CIR	10	LAFAYETTE WAY	END	R	A	2	191	31	5,921	**73**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	LEXINGTOND	LEXINGTON DR	15	PROVINCETOWN DR	INDEPENDENCE BLVD	R	A	2	1,997	37	73,889	**73**	02/03/23	74	80-71	Good (90-71)	07/29/19	DEEP PATCH
Dist 1	MIMBRERAWA	MIMBRERA WAY	010	RIDER AVE	NOGAL DR	R	A	2	859	38	32,642	**73**	02/01/23	74	80-71	Good (90-71)		
Dist 5	NDAVISRD	N DAVIS RD	200NB	BORONDA CROSSING PL	BORONDA RD	A	A	2	1,125	32	36,000	**73**	10/05/23	73	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	200SB	S FREEWAY OFF RAMP	BORONDA CROSSING PL	A	A	2	1,125	32	36,000	**73**	10/05/23	73	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 3	PICOBLANCO	PICO BLANCO ST	10	SAN BLANCO DR	LUTHER WAY	R	A	2	357	37	13,209	**73**	01/23/23	74	80-71	Good (90-71)	05/15/19	SLURRY SEAL
Dist 6	PORTSMOUTH	PORTSMOUTH WAY	10	HARTFORD ST	COVENTRY ST	R	A	2	522	32	16,722	**73**	03/16/23	74	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 6	PROVINCETO	PROVINCETOWN CIR	10	PROVINCETOWN DR	END	R	A	2	310	32	9,920	**73**	02/03/23	74	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	RIDERAVE	RIDER AVE	030	ANTIGUA AVE	FREEDOM PKWY	C	A	2	520	42	21,840	**73**	02/01/23	75	80-71	Good (90-71)		
Dist 1	ROCKROSEST	ROCKROSE ST	15	BUCKHORN DR	END	R	A	2	877	37	32,449	**73**	02/01/23	74	80-71	Good (90-71)	04/19/19	SLURRY SEAL
Dist 6	SISKIYOUDR	SISKIYOU DR	20	KLAMATH DR	LOS COCHES AVE	R	A	2	739	32	23,651	**73**	02/08/23	74	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 5	VANNESSCIR	VAN NESS CIR	10	VAN NESS CT	END	R	A	2	180	32	5,760	**73**	02/09/23	74	80-71	Good (90-71)	01/01/14	SLURRY SEAL
	WMARKET183	W. MARKET ST (SR-183)	010	DAVIS RD SB ON-RAMP	DAVIS RD NB ON-RAMP	NCR	A	4	900	66	59,400	**73**	03/17/23	74	80-71	Good (90-71)		
Dist 1&2	WILLIAMSRD	WILLIAMS RD	050	DEL MONTE AVE	FREEDOM PKWY	A	A	4	2,751	80	220,080	**73**	10/05/23	73	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 6	WIMBLEDONA	WIMBLEDON AVE	40	WIMBLEDON WAY	CHELSEA CT	R	A	2	237	37	8,769	**73**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONC	WIMBLEDON CIR	20	WIMBLEDON AVE	END	R	A	2	273	37	10,101	**73**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WIMBLEDONW	WIMBLEDON WAY	10	WIMBLEDON AVE	ARCADIA WAY	R	A	2	247	38	9,386	**73**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB020	JOHN ST	MAPLE ST	A	A	2	771	36	27,756	**72**	01/19/23	74	80-71	Good (90-71)	06/03/22	FOG SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB10	E LAUREL DR	INDEPENDENCE BLVD	A	A	2	3,904	32	124,944	**72**	01/20/23	73	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB30	BEACON HILL DR (N)	FREEDOM PKWY	A	A	2	840	32	26,880	**72**	01/20/23	74	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 3	DELAVINAWA	DE LA VINA WAY	10	LOS OLIVOS DR	PASATIEMPO WAY	R	A	2	601	32	19,261	**72**	01/23/23	73	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	130WB	RANCH VIEW LN/COUNTY FACILITY	CONSTITUTION BLVD	A	A	2	1,698	35	59,430	**72**	01/19/23	74	80-71	Good (90-71)	06/03/19	SLURRY SEAL
Dist 3&4	EMARKETST	E MARKET ST	025EB	START PCC (E/O GREENFIELD ALL	END PCC (S/O MARKET WAY)	A	P	3	650	38	24,700	**72**	02/10/23	73	80-71	Good (90-71)	02/19/19	DEEP PATCH
Dist 6	ERCIAST	ERCIA ST	15	HARDEN PKWY	HAMPTON ST	R	A	2	760	41	31,160	**72**	02/17/23	73	80-71	Good (90-71)		
Dist 3	GROVEST	GROVE ST	120	MAPLEWOOD ST	MANOR DR	R	A	2	350	32	11,200	**72**	01/24/23	73	80-71	Good (90-71)		
Dist 6	HANCOCKST	HANCOCK ST	15	LEXINGTON DR N. SIDE	LEXINGTON DR S. SIDE	R	A	2	2,612	35	91,420	**72**	02/03/23	73	80-71	Good (90-71)		
Dist 6	LANCASHIRE	LANCASHIRE CIR	10	LANCASHIRE DR	END	R	A	2	346	32	11,099	**72**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	LANCASHIR1	LANCASHIRE DR	10	BUCKINGHAM DR	DORSET WAY	R	A	2	821	32	26,280	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	LEESEDR	LEESE DR	10	SHERMAN DR	ALVARADO DR	R	A	2	1,076	32	34,455	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	NDAVISRD	N DAVIS RD	170NB	W LAUREL DR	WESTRIDGE PKWY	A	A	2	2,232	32	71,424	**72**	10/05/23	72	80-71	Good (90-71)	10/05/23	CHIP SEAL
Dist 1&2	NSANBORNRD	N SANBORN RD	40	DEL MONTE AVE	GARNER AVE	A	A	2	1,545	64	98,880	**72**	01/18/23	74	80-71	Good (90-71)	06/03/22	FOG SEAL
	NMAIN183	N. MAIN ST (SR-183)	080SB	END PCC	W MARKET ST	NCR	A	3	310	37	11,470	**72**	03/17/23	73	80-71	Good (90-71)		
Dist 6	NATIVIDADR	NATIVIDAD RD	070NB	ARCADIA WAY	E BORONDA RD	A	A	3	776	36	27,936	**72**	01/24/23	73	80-71	Good (90-71)	05/24/19	SLURRY SEAL
Dist 6	NEWINGTONS	NEWINGTON ST	15	KITTERY ST	END	R	A	2	1,036	33	34,188	**72**	02/02/23	73	80-71	Good (90-71)	07/11/19	SHALLOW PATCH
Dist 5	OFARRELLCT	OFARRELL CT	10	LARKIN ST (N)	LARKIN ST (S)	R	A	2	1,021	32	32,672	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	RIESLINGWA	RIESLING WAY	15	RHINE CIR	BURGUNDY WAY	R	A	2	915	32	29,304	**72**	03/01/23	73	80-71	Good (90-71)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	SSANBORNRD	S SANBORN RD	020NB	RAILROAD Overpass (PCC START)	RAILROAD Overpass (PCC END)	A	P	2	850	20	17,000	**72**	01/18/23	73	80-71	Good (90-71)		
Dist 3	SSANBORNRD	S SANBORN RD	SB060	RAILROAD Overpass (PCC START)	RAILROAD Overpass (PCC END)	A	P	2	850	20	17,000	**72**	01/18/23	73	80-71	Good (90-71)		
Dist 5	SHERMANCIR	SHERMAN CIR	10	SHERMAN DR	END	R	A	2	260	32	8,320	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	STONYBROOK	STONY BROOK CIR	10	STONY BROOK DR	END	R	A	2	316	32	10,114	**72**	02/03/23	73	80-71	Good (90-71)		
Dist 4	VINCENTPL	VINCENT PL	15	MASSOLO CT (W)	RICO ST	R	A	2	579	33	19,119	**72**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	WELLINGTON	WELLINGTON CT	15	DECLARATION ST (W)	DECLARATION ST (E)	R	A	2	1,819	32	58,237	**72**	02/02/23	74	80-71	Good (90-71)	04/23/19	SLURRY SEAL
Dist 6	WIMBLEDONA	WIMBLEDON AVE	30	COP 375' E/O ESSEX WAY	WIMBLEDON WAY	R	A	2	480	38	18,240	**72**	08/15/23	73	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	ARCADIACT	ARCADIA CT	10	ARCADIA WAY (N)	ARCADIA WAY (S)	R	A	2	1,292	32	41,361	**71**	08/15/23	71	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	BOYLECT	BOYLE CT	15	CHRISTENSEN AVE (W)	CHRISTENSEN AVE (E)	R	A	2	1,149	34	39,066	**71**	08/15/23	72	80-71	Good (90-71)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	CAMBRIDGEC	CAMBRIDGE CT	10	WESTMINSTER DR (N)	END	R	A	2	1,389	32	44,464	**71**	02/17/23	72	80-71	Good (90-71)		
Dist 6	ELIZABETHC	ELIZABETH CIR	10	VICTORIA AVE	END	R	A	2	335	33	11,055	**71**	02/08/23	72	80-71	Good (90-71)	01/01/08	SLURRY SEAL
Dist 4	FILBERTWAY	FILBERT WAY	20	MCCALLISTER ST	NORTH END	R	A	2	275	32	8,800	**71**	03/02/23	72	80-71	Good (90-71)	05/10/19	SLURRY SEAL
Dist 2	HAVENALY	HAVEN ALY	040	BELLEHAVEN ST	N. END	R	P	2	85	21	1,785	**71**	03/13/23	71	80-71	Good (90-71)		
Dist 6	INGLEWOODS	INGLEWOOD ST	110	COVENTRY ST	END	R	A	2	871	38	33,098	**71**	02/04/23	72	80-71	Good (90-71)		
Dist 3	LAJOLLAWAY	LA JOLLA WAY	10	LA CANADA WAY	LOS OLIVOS DR	R	A	2	927	32	29,664	**71**	01/23/23	72	80-71	Good (90-71)	05/14/19	SLURRY SEAL
Dist 6	LONDONDERR	LONDONDERRY WAY	15	COVENTRY ST	END	R	A	2	795	32	25,448	**71**	02/04/23	72	80-71	Good (90-71)		
Dist 6	NEWHAVENWA	NEW HAVEN WAY	10	NEW SALEM DR	NANTUCKET BLVD	R	A	2	365	37	13,505	**71**	02/03/23	72	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 1	PENWICKCIR	PENWICK CIR	10	ROCKHAVEN CT	END	R	A	2	253	32	8,107	**71**	02/02/23	72	80-71	Good (90-71)	01/01/00	REJUVENATION OIL
Dist 6	REGENCYCIR	REGENCY CIR	10	HARDEN PKWY	END	R	A	2	658	42	27,636	**71**	02/17/23	72	80-71	Good (90-71)	01/01/02	SLURRY SEAL
Dist 2	TOWTST	TOWT ST	050	GARNER AVE	E LAUREL DR	C	A	2	2,085	52	108,420	**71**	02/03/23	73	80-71	Good (90-71)	05/01/19	DEEP PATCH
Dist 5	VANBURENAV	VAN BUREN AVE	010	SAN JUAN GRADE RD	E BOLIVAR ST	C	A	2	1,491	37	55,167	**71**	08/31/23	71	80-71	Good (90-71)	08/31/23	SHALLOW PATCH
Dist 6	WESTFIELDC	WESTFIELD CIR	10	HANCOCK ST	END	R	A	2	329	31	10,199	**71**	02/03/23	72	80-71	Good (90-71)	01/01/07	SLURRY SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB100	900' S/O HARKINS RD (W/C)	HARRIS RD	A	O	2	3,300	28	92,400	**70**	01/19/23	71	70-61	Fair (70-51)	01/01/86	2" OVERLAY
Dist 1	EBORONDARD	E BORONDA RD	120	N SANBORN RD	WILLIAMS RD	A	A	2	2,636	45	118,620	**70**	10/05/23	70	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 1&4	ELAURELDR	E LAUREL DR	140EB	RANCH VIEW LN/COUNTY FACILITY	ST EDWARDS AVE	A	A	2	2,305	30	69,150	**70**	01/19/23	72	70-61	Fair (70-51)	06/03/19	SLURRY SEAL
Dist 4	EMARKETST	E MARKET ST	050	SIMAS ST/ GRIFFIN ST	KERN ST	A	A	4	1,540	62	95,480	**70**	01/26/23	72	70-61	Fair (70-51)	01/01/02	CAPE SEAL
Dist 3	ELVEECIR	ELVEE CIR	10	WORK ST	S END	R	A	2	379	42	15,918	**70**	01/18/23	71	70-61	Fair (70-51)		
Dist 1	FREEDOMPKW	FREEDOM PKWY	040	TOWT STREET	WILLIAMS RD	C	A	4	1,638	60	98,280	**70**	02/01/23	72	70-61	Fair (70-51)	05/08/19	SLURRY SEAL
Dist 1	GARNERPVT	GARNER AVE	120PB	GARNER AVE PRIVATE A (EAST)	GARNER AVE PRIVATE A (WEST)	R	A	2	585	22	12,870	**70**	02/02/23	71	70-61	Fair (70-51)		
Dist 6	HARRODWAY	HARROD WAY	15	HAMPTON ST	ERCIA ST	R	A	2	976	33	32,208	**70**	02/17/23	71	70-61	Fair (70-51)		
Dist 6	HARTFORDST	HARTFORD ST	15	INGLEWOOD ST	COVENTRY ST	R	A	2	1,469	32	47,021	**70**	02/04/23	71	70-61	Fair (70-51)		
Dist 4	LAKEALY	LAKE ALY	10	MARKET WAY	E LAKE ST	R	P	2	677	20	13,540	**70**	03/17/23	70	70-61	Fair (70-51)		
Dist 6	LANCASHIR1	LANCASHIRE DR	20	DORSET WAY	LANCASHIRE CIR	R	A	2	248	32	7,936	**70**	08/15/23	71	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	MARSHFIEL1	MARSHFIELD CT	10	HANCOCK ST W. SIDE	HANCOCK ST E. SIDE	R	A	2	1,307	33	43,131	**70**	02/03/23	71	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 5	NDAVISRD	N DAVIS RD	170SB	WESTRIDGE PKWY	W LAUREL DR	A	A	2	2,239	32	71,648	**70**	10/05/23	70	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	180SB	AUTO CENTER CIR	WESTRIDGE PKWY	A	A	2	4,488	32	143,616	**70**	10/05/23	70	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	NDAVISRD	N DAVIS RD	190SB	BORONDA CROSSING PL (N)	AUTO CENTER CIR	A	A	2	2,405	32	76,960	**70**	10/05/23	70	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	NATIVIDADR	NATIVIDAD RD	SB120	LOS COCHES AVE	E ALVIN DR	A	O	3	1,803	36	64,908	**70**	01/24/23	72	70-61	Fair (70-51)	05/24/19	SHALLOW PATCH
Dist 6	RHINECT	RHINE CT	10	RIESLING WAY (W)	RIESLING WAY (E)	R	A	2	1,089	33	35,955	**70**	03/01/23	71	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 4	ROSARITADR	ROSARITA DR	15	SANTA TERESA WAY	E BERNAL DR	R	A	2	2,102	32	67,269	**70**	02/17/23	71	70-61	Fair (70-51)		
Dist 6	TUDORWAY	TUDOR WAY	10	VICTORIA AVE	S END	R	A	2	420	33	13,860	**70**	02/08/23	71	70-61	Fair (70-51)		
Dist 6	WESTMINSTE	WESTMINSTER DR	10	MCKINNON ST	CAMBRIDGE CT	R	A	2	1,642	38	62,396	**70**	02/17/23	71	70-61	Fair (70-51)		
Dist 6	WHITERIVER	WHITE RIVER CIR	10	STONY BROOK DR	END	R	A	2	489	32	15,657	**70**	02/03/23	71	70-61	Fair (70-51)		
Dist 6	ABBEYWAY	ABBEY WAY	10	CROMWELL DR	GLADSTONE WAY	R	A	2	248	33	8,184	**69**	02/08/23	70	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 1	ANDOVERCIR	ANDOVER CIR	10	NEWCASTLE DR	END	R	A	2	210	31	6,510	**69**	02/02/23	70	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 6	BOSTONCIR	BOSTON CIR	10	BENNINGTON CT	END	R	A	2	220	32	7,040	**69**	02/02/23	70	70-61	Fair (70-51)	04/22/19	SLURRY SEAL
Dist 5	COLTONDR	COLTON DR	15	FLINT WAY	ESTRADA WAY	R	A	2	1,311	32	41,958	**69**	03/02/23	70	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 6	CROMWELLDR	CROMWELL DR	15	EL DORADO DR	VICTORIA AVE	R	A	2	1,361	37	50,357	**69**	02/08/23	70	70-61	Fair (70-51)		
Dist 6	DELANCEYDR	DELANCEY DR	15	BROADWAY DR	END	R	A	2	1,675	37	61,975	**69**	08/15/23	69	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	GAMAYWAY	GAMAY WAY	15	RIESLING WAY	END	R	A	2	1,017	37	37,629	**69**	03/01/23	70	70-61	Fair (70-51)		
Dist 4	GRIFFINST	GRIFFIN ST	25	E ALISAL ST	E MARKET ST	R	A	2	2,005	38	76,190	**69**	01/26/23	70	70-61	Fair (70-51)		
Dist 6	HARVARDCT	HARVARD CT	10	PENNSYLVANIA DR (W)	PENNSYLVANIA DR (E)	R	A	2	844	33	27,852	**69**	08/15/23	69	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 1&6	HEMINGWAYD	HEMINGWAY DR	010	E BORONDA RD	NANTUCKET BLVD	C	A	2	921	50	46,050	**69**	02/03/23	71	70-61	Fair (70-51)		
Dist 2	JAMESST	JAMES ST	020	SMITH ST	S MADEIRA AVE	R	A	2	526	42	22,092	**69**	01/19/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	LACANADAWA	LA CANADA WAY	20	LA JOLLA WAY	NE END	R	A	2	430	32	13,760	**69**	01/23/23	70	70-61	Fair (70-51)	05/13/19	SLURRY SEAL
Dist 3	MAINST	MAIN ST	40	W GABILAN ST	CENTRAL AVE	C	A	2	430	36	15,485	**69**	03/16/23	71	70-61	Fair (70-51)	11/20/20	SLURRY SEAL
Dist 6	MARSHFIELD	MARSHFIELD CIR	10	HANCOCK ST	END	R	A	2	332	32	10,641	**69**	02/03/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 1	MELVILLEST	MELVILLE ST	10	LONGFELLOW DR	WHITMAN ST	R	A	2	1,070	31	33,170	**69**	03/16/23	70	70-61	Fair (70-51)	01/01/00	REJUVENATION OIL
Dist 5	NDAVISRD	N DAVIS RD	190NB	AUTO CENTER CIR	BORONDA CROSSING PL (N)	A	A	2	2,374	32	75,968	**69**	10/05/23	69	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	NEWBRITAIN	NEW BRITAIN CIR	10	NEW SALEM DR	END	R	A	2	251	32	8,052	**69**	02/03/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	NEWSALEMDR	NEW SALEM DR	15	BURLINGTON DR	END	R	A	2	1,248	35	43,680	**69**	02/03/23	70	70-61	Fair (70-51)		
Dist 6	NEWINGTONC	NEWINGTON CIR	10	NEWINGTON ST	END	R	A	2	145	61	8,845	**69**	02/02/23	70	70-61	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 2	QUILLAST	QUILLA ST	15	E MARKET ST	WILLIAMS RD	R	A	2	1,418	35	49,630	**69**	03/13/23	70	70-61	Fair (70-51)	04/26/19	SLURRY SEAL
Dist 1	ROCKHAVENC	ROCKHAVEN CT	15	NEWCASTLE DR (N)	NEWCASTLE DR (S)	R	A	2	2,046	32	65,472	**69**	02/02/23	70	70-61	Fair (70-51)		
Dist 6	SUFFIELDCI	SUFFIELD CIR	10	HANCOCK ST	END	R	A	2	294	31	9,114	**69**	02/03/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	TUDORWAY	TUDOR WAY	20	LENNOX WAY	TUDOR WAY	R	A	2	860	33	28,380	**69**	02/08/23	70	70-61	Fair (70-51)		
Dist 3	UNIVERSITY	UNIVERSITY AVE	10	AMBROSE DR	W ACACIA ST	R	A	2	1,555	37	57,535	**69**	01/25/23	70	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 4	VALLEJOST	VALLEJO ST	20	TAMPICO AVE	GRANADA AVE	R	A	2	177	32	5,679	**69**	02/17/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 5	VANNESSCT	VAN NESS CT	20	VICTOR ST (E)	HYDE ST	R	A	2	705	38	26,790	**69**	02/09/23	70	70-61	Fair (70-51)		
Dist 6	VICTORIAAV	VICTORIA AVE	15	WINDSOR ST	EL DORADO DR	R	A	2	1,643	37	60,791	**69**	02/08/23	70	70-61	Fair (70-51)		
Dist 6	WATERFORDC	WATERFORD CIR	10	INGLEWOOD ST	END	R	A	2	237	32	7,587	**69**	02/04/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	WENTWORTHC	WENTWORTH CIR	10	LONDONDERRY WAY	END	R	A	2	154	32	4,928	**69**	02/04/23	70	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	WINDSORST	WINDSOR ST	15	CHARDONNAY DR	HARDEN PKWY	R	A	2	1,049	37	38,849	**69**	03/01/23	70	70-61	Fair (70-51)		
Dist 3	WORKST	WORK ST	30	WORK CIR	ELVEE DR	A	A	4	1,922	62	119,164	**69**	01/18/23	70	70-61	Fair (70-51)		
Dist 6	CABERNETCI	CABERNET CIR	10	CABERNET WAY	END	R	A	2	190	31	5,890	**68**	03/01/23	69	70-61	Fair (70-51)	02/27/19	DEEP PATCH
Dist 6	CHARDONNAY	CHARDONNAY CIR	10	CHARDONNAY DR	END	R	A	2	200	31	6,200	**68**	03/01/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	CHARDONNA1	CHARDONNAY DR	15	CROMWELL DR	MCKINNON ST	R	A	2	2,365	41	96,965	**68**	03/01/23	69	70-61	Fair (70-51)		
Dist 6	CHURCHILLW	CHURCHILL WAY	15	CROMWELL DR (W)	CROMWELL DR (N)	R	A	2	1,057	33	34,881	**68**	02/08/23	69	70-61	Fair (70-51)		
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB70	INDEPENDENCE BLVD	E LAUREL DR	A	A	2	3,904	32	124,944	**68**	01/20/23	70	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 6	CROMWELLCI	CROMWELL CIR	10	CROMWELL DR	END	R	A	2	128	32	4,104	**68**	02/08/23	69	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 4&6	ELAURELDR	E LAUREL DR	120WB	CONSTITUTION BLVD	NATIVIDAD RD	A	A	2	1,907	35	66,745	**68**	01/19/23	70	70-61	Fair (70-51)	06/03/19	SLURRY SEAL
Dist 6	GLADSTONEW	GLADSTONE WAY	15	CHARDONNAY DR	END	R	A	2	1,203	33	39,699	**68**	02/08/23	69	70-61	Fair (70-51)		
Dist 3	HARMONYLN	HARMONY LN	10	E SAN LUIS ST	E ALISAL ST	R	P	2	679	15	10,185	**68**	01/26/23	69	70-61	Fair (70-51)		
Dist 4	HILLCIR	HILL CIR	10	N MADEIRA AVE	END	R	A	2	174	37	6,438	**68**	03/03/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	HYANNISCIR	HYANNIS CIR	10	COVENTRY ST	END	R	A	2	176	32	5,639	**68**	02/04/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 1	LAHONDACT	LA HONDA CT	020	RANCHERO DR	ALAMO WAY (S)	R	A	2	590	38	22,420	**68**	02/02/23	69	70-61	Fair (70-51)		
Dist 6	LENNOXWAY	LENNOX WAY	15	TUDOR WAY	VICTORIA AVE	R	A	2	1,150	33	37,950	**68**	02/08/23	69	70-61	Fair (70-51)		
Dist 1	LNGFLWCIR	LONGFELLOW CIR	10	LONGFELLOW DR	END	R	A	2	393	31	12,183	**68**	02/02/23	69	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 5	NDAVISRD	N DAVIS RD	180NB	WESTRIDGE PKWY	AUTO CENTER CIR	A	A	2	4,506	32	144,192	**68**	10/05/23	69	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	RHINECIR	RHINE CIR	10	RIESLING WAY	END	R	A	2	240	33	7,920	**68**	03/01/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 5	RICOCIR	RICO CIR	10	LARKIN ST	END	R	A	2	455	36	16,380	**68**	03/01/23	69	70-61	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 2	SURREYWAY	SURREY WAY	10	COUNTRYSIDE DR	ANDINA DR	R	A	2	963	32	30,825	**68**	03/15/23	69	70-61	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 6	TOKAYCIR	TOKAY CIR	10	CABERNET WAY	END	R	A	2	130	31	4,030	**68**	03/01/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 4	VICTORST	VICTOR ST	20	W ROSSI ST	MCALLISTER ST	R	A	2	674	41	27,634	**68**	03/02/23	69	70-61	Fair (70-51)	05/15/19	SLURRY SEAL
Dist 6	WATERBURYW	WATERBURY WAY	10	CANTERBURY ST	LEXINGTON DR	R	A	2	262	32	8,393	**68**	02/03/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	WESTPORTCI	WESTPORT CIR	10	INGLEWOOD ST	END	R	A	2	104	66	6,873	**68**	02/04/23	69	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 1	WHITMANST	WHITMAN ST	15	NANTUCKET BLVD	LONGFELLOW DR	R	A	2	480	37	17,760	**68**	02/02/23	69	70-61	Fair (70-51)		
Dist 6	YALECIR	YALE CIR	10	PENNSYLVANIA DR	END	R	A	2	200	31	6,200	**68**	08/15/23	68	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	ALAMEDAPL	ALAMEDA PL	10	ALAMEDA AVE (N)	ALAMEDA AVE (S)	R	A	2	633	32	20,256	**67**	01/19/23	68	70-61	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	CALIFORNIA	CALIFORNIA ALY	010	E GABILAN ST	E ALISAL ST	R	P	2	765	20	15,300	**67**	01/20/23	68	70-61	Fair (70-51)		
Dist 4	CHAPARRALS	CHAPARRAL ST	035	LINWOOD DR	NATIVIDAD RD	C	A	2	2,486	38	94,468	**67**	02/17/23	69	70-61	Fair (70-51)	05/16/19	DEEP PATCH
Dist 3	COLERIDGED	COLERIDGE DR	10	LOS OLIVOS ST	RIKER ST	R	A	2	1,411	37	52,207	**67**	01/23/23	68	70-61	Fair (70-51)	05/16/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB40	LAS CASITAS DR	FREEDOM PKWY	A	A	2	1,202	34	40,868	**67**	01/20/23	69	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 1	CTTNWDCT	COTTONWOOD CT	10	COTTONWOOD DR (W)	COTTONWOOD DR (E)	R	A	2	895	33	29,535	**67**	02/01/23	68	70-61	Fair (70-51)	04/18/19	SLURRY SEAL
Dist 3&4	EMARKETST	E MARKET ST	120WB	BEGIN PCC (S/O MARKET WAY)	END PCC (E/O GREENFIELD ALLEY	A	P	4	575	48	27,600	**67**	02/10/23	68	70-61	Fair (70-51)		
Dist 6	HARDENPKWY	HARDEN PKWY	EB010	N MAIN ST	BROADWAY DR	C	A	2	2,015	28	56,420	**67**	10/05/23	67	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	EB020	BROADWAY DR	MCKINNON ST	C	A	2	1,161	28	32,508	**67**	10/05/23	67	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	HARRODCIR	HARROD CIR	10	HARROD WAY	END	R	A	2	331	33	10,923	**67**	02/17/23	68	70-61	Fair (70-51)	01/01/07	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	JAMESST	JAMES ST	010	S WOOD ST	SMITH ST	R	A	2	385	41	15,785	**67**	01/19/23	68	70-61	Fair (70-51)		
Dist 3	LAJOLLACIR	LA JOLLA CIR	10	LA JOLLA WAY	END	R	A	2	337	32	10,784	**67**	01/23/23	68	70-61	Fair (70-51)	05/21/19	SLURRY SEAL
Dist 5	LARKINST	LARKIN ST	015	W END	N DAVIS RD	R	A	2	344	37	12,728	**67**	03/01/23	68	70-61	Fair (70-51)		
Dist 2	MOFFETTST	MOFFETT ST	020	LA GUARDIA ST	VANDENBERG ST	R	A	2	1,261	41	51,701	**67**	01/17/23	68	70-61	Fair (70-51)		
Dist 5	NDAVISRD	N DAVIS RD	160NB	SLOAT DR	W LAUREL DR	A	A	2	3,026	32	96,832	**67**	10/05/23	67	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 3	PAJAROWAY	PAJARO WAY	10	PAJARO ST	END	R	A	2	246	34	8,364	**67**	01/19/23	69	70-61	Fair (70-51)	07/05/19	DEEP PATCH
Dist 3	SANBLANCOD	SAN BLANCO DR	25	PICO BLANCO	LAS CRUCES WAY	R	A	2	974	37	36,038	**67**	01/23/23	68	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 3	SANDIEGODR	SAN DIEGO DR	15	SANTA CRUZ AVE	SAN BRUNO WAY	R	A	2	831	32	26,611	**67**	01/19/23	68	70-61	Fair (70-51)		
Dist 4	STALBANSWA	ST ALBANS WAY	10	CIRCLE DR	ST ALBANS CT	R	A	2	576	32	18,463	**67**	03/03/23	68	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	TEHAMACIR	TEHAMA CIR	10	RAINIER DR	END	R	A	2	414	32	13,251	**67**	02/09/23	68	70-61	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	UNIVERSITY	UNIVERSITY AVE	20	W ACACIA ST	CENTRAL AVE	R	A	2	1,751	37	64,787	**67**	01/25/23	68	70-61	Fair (70-51)	05/06/19	SHALLOW PATCH
	WMARKET183	W. MARKET ST (SR-183)	020	DAVIS RD NB ON-RAMP	CLARK ST	NCR	A	4	740	72	53,280	**67**	03/17/23	68	70-61	Fair (70-51)		
Dist 5	ADOBEDR	ADOBE DR	15	SLOAT DR	VICTOR ST	R	A	2	1,021	37	37,782	**66**	03/02/23	67	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 2&3	AIRPORTBLV	AIRPORT BLVD	030	ROY DIAZ ST	TERVEN AVE	A	A	4	890	50	44,500	**66**	01/23/23	68	70-61	Fair (70-51)		
Dist 3	ARCHERST	ARCHER ST	210	RIKER ST	CAPITOL ST	R	A	2	320	32	10,240	**66**	03/16/23	67	70-61	Fair (70-51)	01/01/01	CAPE SEAL
Dist 5	BORONDARD	BORONDA RD	120	135' NW OF N DAVIS RD (CITY LIMI	N DAVIS RD	R	A	2	135	32	4,320	**66**	03/16/23	67	70-61	Fair (70-51)	04/15/19	SHALLOW PATCH
Dist 5	BROOKSRD	BROOKS RD	10	WESTRIDGE PKWY	BORONDA RD	R	A	2	884	32	28,290	**66**	03/16/23	67	70-61	Fair (70-51)		
Dist 6	CABERNETWA	CABERNET WAY	15	CHARDONNAY DR	BURGUNDY WAY	R	A	2	1,103	33	36,399	**66**	03/01/23	67	70-61	Fair (70-51)		
Dist 6	CHABLISCIR	CHABLIS CIR	10	MERLOT WAY	END	R	A	2	259	31	8,029	**66**	03/01/23	67	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 2	EALISALST	E ALISAL ST	055	QUILLA ST/ SKYWAY BLVD	WILLIAMS RD	A	A	4	617	80	49,360	**66**	01/25/23	68	70-61	Fair (70-51)	01/01/91	CAPE SEAL
Dist 4	EMARKETST	E MARKET ST	040	SHERWOOD DR/ MARKET WAY	SIMAS ST/ GRIFFIN ST	A	A	4	1,550	56	86,800	**66**	01/26/23	68	70-61	Fair (70-51)	02/14/19	DEEP PATCH
Dist 3	ESANLUISST	E SAN LUIS ST	090	FRONT ST	E END	R	A	2	560	32	17,920	**66**	01/26/23	67	70-61	Fair (70-51)		
Dist 5	ESTRADAWAY	ESTRADA WAY	15	SLOAT DR	END	R	A	2	1,312	32	41,987	**66**	03/02/23	67	70-61	Fair (70-51)	05/09/19	SLURRY SEAL
Dist 3	GROVEST	GROVE ST	010	ALAMEDA AVE	START OF LOOP	R	P	2	360	34	12,240	**66**	01/24/23	67	70-61	Fair (70-51)	02/25/19	DEEP PATCH
Dist 5	LEGIONALY	LEGION ALY	10	ROCHEX AVE	W LAUREL DR	R	P	2	451	20	9,023	**66**	03/17/23	66	70-61	Fair (70-51)		
Dist 3	LINCOLNAVE	LINCOLN AVE	010	W MARKET ST	CLAY ST	A	A	2	2,827	43	121,561	**66**	08/15/23	67	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	MCKINNONST	MCKINNON ST	10	E ALVIN DR	WESTMINSTER DR	C	A	4	988	54	53,352	**66**	10/05/23	66	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	MERLOTCIR	MERLOT CIR	10	MERLOT WAY	END	R	A	2	231	31	7,161	**66**	03/01/23	67	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	MERLOTWAY	MERLOT WAY	15	CHARDONNAY DR	WINDSOR ST	R	A	2	1,214	33	40,062	**66**	03/01/23	67	70-61	Fair (70-51)		
	NMAIN183	N. MAIN ST (SR-183)	010NB	W. MARKET ST	END DIVIDED RD (450' N/O W MARK	NCR	P	2	450	38	17,100	**66**	03/17/23	67	70-61	Fair (70-51)		
Dist 1&6	NANTUCKETB	NANTUCKET BLVD	30	DECLARATION ST	CONSTITUTION BLVD	C	A	2	1,122	44	49,368	**66**	02/02/23	68	70-61	Fair (70-51)		
Dist 2	PALOMAAVE	PALOMA AVE	40	MIAMI ST	MARGARET ST	R	A	2	747	34	25,398	**66**	03/13/23	67	70-61	Fair (70-51)		
Dist 3	PASATIEMPO	PASATIEMPO WAY	15	N. END	S. END	R	A	2	627	32	20,064	**66**	01/23/23	67	70-61	Fair (70-51)	05/24/19	SHALLOW PATCH
Dist 3	PELLETTAVE	PELLETT AVE	15	S SANBORN RD	VERTIN AVE	R	A	2	1,062	41	43,542	**66**	01/17/23	67	70-61	Fair (70-51)		
Dist 4	ROSSIALY	ROSSI ALY	020	START PCC	E ROSSI ST	R	P	1	175	14	2,450	**66**	03/17/23	67	70-61	Fair (70-51)		
Dist 3	SANFERNAN1	SAN FERNANDO DR	15	WILGART WAY	LA MESA DR	R	A	2	1,617	32	51,752	**66**	01/19/23	67	70-61	Fair (70-51)		
Dist 5	SLOATCIR	SLOAT CIR	10	SLOAT DR	END	R	A	2	350	32	11,200	**66**	03/02/23	67	70-61	Fair (70-51)	05/13/19	SLURRY SEAL
Dist 4&5	SLOATDR	SLOAT DR	10	N DAVIS RD	POTRERO WAY	R	A	2	810	37	29,970	**66**	03/02/23	67	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 5	VANBURENAV	VAN BUREN AVE	020	E BOLIVAR ST	EISENHOWER ST	C	A	2	1,023	38	38,874	**66**	08/15/23	67	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	VICTORIACI	VICTORIA CIR	10	VICTORIA AVE	END	R	A	2	273	33	9,009	**66**	02/08/23	67	70-61	Fair (70-51)	01/01/02	REJUVENATION OIL
Dist 6	ZINFANDELW	ZINFANDEL WAY	10	CHARDONNAY DR	WINDSOR ST	R	A	2	835	33	27,555	**66**	03/01/23	67	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 6	BURGUNDYWA	BURGUNDY WAY	15	CABERNET WAY	CHARDONNAY DR	R	A	2	422	37	15,614	**65**	03/01/23	66	70-61	Fair (70-51)		
Dist 6	CHURCHILLC	CHURCHILL CIR	10	CHURCHILL WAY	END	R	A	2	244	33	8,052	**65**	02/08/23	66	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 1	COBBLESTON	COBBLESTONE ST	020	START ONEWAY LOOP	END ONEWAY @ COBBLESTONE	R	A	1	545	26	14,170	**65**	02/02/23	66	70-61	Fair (70-51)		
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB20	NANTUCKET BLVD	BEACON HILL DR (N)	A	A	2	886	34	30,124	**65**	01/20/23	67	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 6	CREEKBRIDG	CREEKBRIDGE CIR	10	PROVINCETOWN DR	END	R	A	2	316	32	10,119	**65**	02/03/23	66	70-61	Fair (70-51)		
Dist 4	EBERNALDR	E BERNAL DR	40	10 E BERNAL DR	S END	R	A	2	264	32	8,448	**65**	03/16/23	66	70-61	Fair (70-51)		
Dist 1	GARNERPVT	GARNER AVE	110PA	GARNER AVE (CULDESAC NORTH)	GEE STREET (CULDESAC)	R	A	2	1,232	22	27,104	**65**	02/02/23	66	70-61	Fair (70-51)		
Dist 5	GEARYCIR	GEARY CIR	10	LARKIN ST	END	R	A	2	420	32	13,440	**65**	08/15/23	65	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	WB020	WINDSOR ST	MCKINNON ST	C	A	2	937	28	26,236	**65**	10/05/23	65	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	WB040	BROADWAY DR	N MAIN ST	C	A	2	2,026	28	56,728	**65**	10/05/23	65	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 3	LASCRUCESW	LAS CRUCES WAY	15	SAN BLANCO DR	W END	R	A	2	396	32	12,697	**65**	01/23/23	66	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 1	LNGFLWDR	LONGFELLOW DR	20	HEMINGWAY DR	WHITMAN CIR	R	A	2	969	37	35,853	**65**	02/02/23	66	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 3	LOSOLIVOSD	LOS OLIVOS DR	55	SAN BLANCO DR	W BLANCO RD	R	A	2	1,693	37	62,641	**65**	01/23/23	66	70-61	Fair (70-51)	05/21/19	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	MELODYLN	MELODY LN	10	W GABILAN ST	W ALISAL ST	R	P	2	669	15	10,035	**65**	01/26/23	66	70-61	Fair (70-51)		
Dist 4	MEYERSCT	MEYERS CT	10	N HEBBRON AVE (S)	N HEBBRON AVE (N)	R	P	2	1,015	30	30,452	**65**	03/13/23	66	70-61	Fair (70-51)		
Dist 4	NDAVISRD	N DAVIS RD	150NB	W ROSSI ST	SLOAT DR	A	O	2	751	32	24,032	**65**	10/05/23	65	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 3	PAJAROST	PAJARO ST	010	E MARKET ST	JOHN ST	A	A	2	2,708	50	135,400	**65**	01/20/23	67	70-61	Fair (70-51)	05/21/19	DEEP PATCH
Dist 1	PICKFORDWA	PICKFORD WAY	10	DECLARATION ST	ROCKHAVEN CT	R	A	2	258	32	8,261	**65**	02/02/23	66	70-61	Fair (70-51)	01/01/00	REJUVENATION OIL
Dist 4	RAGSDALECT	RAGSDALE CT	10	E MARKET ST	END	R	P	2	99	18	1,782	**65**	01/26/23	66	70-61	Fair (70-51)		
Dist 2	SANBENITOS	SAN BENITO ST	010	S WOOD ST	S MADEIRA AVE	R	A	2	900	42	37,800	**65**	01/19/23	66	70-61	Fair (70-51)		
Dist 3	SANJACINTO	SAN JACINTO DR	10	KENTFIELD DR	MONTECITO WAY	R	A	2	1,052	32	33,665	**65**	01/24/23	66	70-61	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 3	SANMIGUELA	SAN MIGUEL AVE	040	SAN FERNANDO DR	SAN MATEO DR	C	A	2	1,137	38	43,206	**65**	01/19/23	67	70-61	Fair (70-51)	03/26/19	DEEP PATCH
Dist 4	SHERWOODDR	SHERWOOD DR	040	101 Overpass (PCC END)	185 Ft S/O SHERWOOD PL	A	A	4	850	57	48,450	**65**	01/20/23	67	70-61	Fair (70-51)		
Dist 2	SMITHST	SMITH ST	15	JAMES ST	E ALISAL ST	R	A	2	911	24	21,864	**65**	01/19/23	66	70-61	Fair (70-51)		
Dist 6	SOLANOWAY	SOLANO WAY	10	E ALVIN DR	MENDOCINO DR	R	A	2	245	37	9,065	**65**	02/17/23	66	70-61	Fair (70-51)		
Dist 5	WLAURELDR	W LAUREL DR	035	TYLER ST	101 N ON/OFF RAMP	A	A	4	1,104	68	75,072	**65**	08/14/23	66	70-61	Fair (70-51)	08/14/23	SEAL CRACKS
Dist 3	WSANLUISST	W SAN LUIS ST	15	SALINAS ST	MAIN ST	A	P	2	353	32	11,310	**65**	03/16/23	66	70-61	Fair (70-51)	06/03/19	SHALLOW PATCH
Dist 6	WHEELERDR	WHEELER DR	15	E ALVIN DR	END	R	A	2	846	41	34,686	**65**	08/15/23	66	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	1STAVE	1ST AVE	15	TOWT ST	E MARKET ST	R	A	2	1,915	63	120,645	**64**	03/13/23	65	70-61	Fair (70-51)	04/26/19	SLURRY SEAL
Dist 3	AIRPORTBLV	AIRPORT BLVD	050	HANSEN ST	SW END	R	A	2	385	48	18,480	**64**	01/17/23	65	70-61	Fair (70-51)		
Dist 2	ANDINADR	ANDINA DR	15	COUNTRYSIDE DR	ARGENTINE DR	R	A	2	821	37	30,377	**64**	03/15/23	65	70-61	Fair (70-51)		
Dist 3	ARCHERST	ARCHER ST	110	HOMESTEAD AVE	WEST ST	R	P	2	640	40	25,600	**64**	03/16/23	65	70-61	Fair (70-51)		
Dist 3	COLERIDGED	COLERIDGE DR	20	RIKER ST	SE END	R	A	2	425	32	13,600	**64**	01/23/23	65	70-61	Fair (70-51)	05/17/19	SLURRY SEAL
Dist 6	EBORONDARD	E BORONDA RD	WB010	DARTMOUTH WAY	SAN JUAN GRADE RD	A	O	2	977	40	39,080	**64**	01/24/23	65	70-61	Fair (70-51)	01/01/10	1-1/2" OVERLAY
Dist 3	ELPASOPL	EL PASO PL	15	CARMEL AVE	ALAMEDA AVE	R	P	2	608	32	19,456	**64**	01/24/23	65	70-61	Fair (70-51)		
Dist 4	FELLCIR	FELL CIR	10	FULTON WAY	END	R	A	2	305	32	9,760	**64**	08/15/23	64	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 6	HIDDENCREE	HIDDEN CREEK CIR	10	PROVINCETOWN DR	END	R	A	2	188	32	6,036	**64**	02/03/23	65	70-61	Fair (70-51)		
Dist 5	HOWEDR	HOWE DR	15	SHERMAN DR	END	R	A	2	739	32	23,660	**64**	08/15/23	64	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	LOHMANST	LOHMAN ST	15	EISENHOWER ST	END	R	A	2	700	37	25,900	**64**	03/02/23	65	70-61	Fair (70-51)		
Dist 3	LUTHERWAY	LUTHER WAY	10	PICO BLANCO	W BLANCO RD	R	A	2	420	23	9,660	**64**	01/23/23	65	70-61	Fair (70-51)	05/15/19	SLURRY SEAL
Dist 1	MAEAVE	MAE AVE	010	TOWT ST	C.O.P.	R	A	2	325	38	12,350	**64**	02/03/23	65	70-61	Fair (70-51)		
Dist 1	MSSCHUCIR	MASSACHUSETTS CIR	10	MASSACHUSETTS DR	END	R	A	2	235	33	7,755	**64**	02/01/23	65	70-61	Fair (70-51)	01/01/08	SLURRY SEAL
	NMAIN183	N. MAIN ST (SR-183)	040SB	BERNAL DR	START PCC BRIDGE	NCR	A	2	600	37	22,200	**64**	03/17/23	65	70-61	Fair (70-51)		
Dist 1&6	NANTUCKETB	NANTUCKET BLVD	20	HEMINGWAY DR	DECLARATION ST	C	A	2	1,851	43	79,593	**64**	02/02/23	66	70-61	Fair (70-51)		
Dist 3	PAJAROST	PAJARO ST	070	SAN PEDRO ST	E BLANCO RD	A	C	2	1,166	32	37,312	**64**	01/20/23	65	70-61	Fair (70-51)		
Dist 3	PRIMAVERAS	PRIMAVERA ST	15	KIPLING ST	COLERIDGE DR	R	A	2	705	37	26,085	**64**	01/23/23	65	70-61	Fair (70-51)	05/13/19	SLURRY SEAL
Dist 6	PROVINCET1	PROVINCETOWN DR	30	INDEPENDENCE BLVD	PROVINCETOWN WAY	R	A	2	907	32	29,024	**64**	02/03/23	65	70-61	Fair (70-51)	07/03/19	SHALLOW PATCH
Dist 6	PROVINCET1	PROVINCETOWN DR	40	PROVINCETOWN WAY	SW END	R	A	2	404	34	13,736	**64**	02/03/23	65	70-61	Fair (70-51)		
Dist 6	PROVINCET2	PROVINCETOWN WAY	10	HIDDEN CREEK CIR	INDEPENDENCE BLVD	R	A	2	144	37	5,328	**64**	02/03/23	65	70-61	Fair (70-51)		
Dist 4	RAGSDALECT	RAGSDALE CT	20	ROOSEVELT ST	RAGSDALE CT	R	P	2	332	30	9,960	**64**	01/26/23	65	70-61	Fair (70-51)		
Dist 6	SNUGHARBOR	SNUG HARBOR ST	15	KITTERY ST	END	R	A	2	1,469	32	47,024	**64**	02/02/23	65	70-61	Fair (70-51)		
Dist 4	STAUGUSTIN	ST AUGUSTINE DR	10	ST REGIS WAY	ST CHARLES WAY	R	A	2	1,632	32	52,247	**64**	03/03/23	65	70-61	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	STEPHANIED	STEPHANIE DR	20	STEPHANIE DR	C.O.P.	R	A	2	500	35	17,500	**64**	01/23/23	65	70-61	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	WILGARTWAY	WILGART WAY	35	E ROMIE LN	SAN MIGUEL AVE	R	C	2	1,442	32	46,144	**64**	01/19/23	65	70-61	Fair (70-51)		
Dist 3	ABBOTTST	ABBOTT ST	NB010	HARRIS RD	2950' N/O HARRIS RD (W/C)	A	O	2	2,950	28	82,600	**63**	01/19/23	64	70-61	Fair (70-51)	05/21/19	DEEP PATCH
Dist 4&5	CASENTINIS	CASENTINI ST	10	RICO ST	N MAIN ST	C	A	2	2,331	42	97,941	**63**	03/16/23	65	70-61	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 5	CHEROKEEDR	CHEROKEE DR	050	W AVLIN DR	INCA WAY	C	A	2	883	38	33,554	**63**	02/16/23	65	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB60	BEACON HILL DR (N)	RHODE ISLAND ST	A	A	2	877	34	29,818	**63**	01/20/23	65	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 3	FRONTST	FRONT ST	075	JOHN ST	MAPLE ST	R	P	2	979	32	31,328	**63**	01/20/23	64	70-61	Fair (70-51)		
Dist 3	GEILST	GEIL ST	20	RIKER ST	S MAIN ST	R	P	2	1,345	40	53,800	**63**	10/27/20	66	70-61	Fair (70-51)		
Dist 3	HARVESTALY	HARVEST ALY	10	WINHAM ST	HARVEST ST	R	P	2	275	15	4,125	**63**	01/20/23	64	70-61	Fair (70-51)		
Dist 5	KEARNYWAY	KEARNY WAY	10	ALVARADO DR	LARKIN ST	R	A	2	479	36	17,244	**63**	08/15/23	63	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	LAHONDACT	LA HONDA CT	010	ALAMO WAY (N)	RANCHERO DR	R	A	2	935	32	29,920	**63**	02/02/23	64	70-61	Fair (70-51)		
Dist 5	LARKINST	LARKIN ST	045	VICTOR ST	RICO ST	C	A	2	756	41	30,996	**63**	03/01/23	65	70-61	Fair (70-51)	05/15/19	SLURRY SEAL
	NMAIN183	N. MAIN ST (SR-183)	030NB	END PCC N/O CASENTINI ST	BERNAL DR	NCR	A	2	1,750	36	63,000	**63**	03/17/23	64	70-61	Fair (70-51)		
Dist 4	SANSOMEST	SANSOME ST	15	RICO ST	W ROSSI ST	R	A	2	1,630	35	57,050	**63**	08/15/23	64	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	SANTAMARIA	SANTA MARIA ST	15	S WOOD ST	S MADEIRA AVE	R	A	2	899	42	37,758	**63**	01/19/23	64	70-61	Fair (70-51)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 4	SANTATERE1	SANTA TERESA WAY	15	E LAUREL DR	GRANADA AVE	R	A	2	1,619	37	59,903	**63**	02/17/23	64	70-61	Fair (70-51)		
Dist 3	VICTORWAY	VICTOR WAY	15	WEST END	EAST END	R	A	2	605	42	25,410	**63**	03/02/23	64	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 1	ANTIGUAAVE	ANTIGUA AVE	15	RIDER AVE	N SANBORN RD	C	A	2	1,537	37	56,886	**62**	02/03/23	64	70-61	Fair (70-51)		
Dist 3	CALIFORNIA	CALIFORNIA ALY	020	E ALISAL ST	E SAN LUIS ST	R	C	2	668	20	13,361	**62**	11/02/20	67	70-61	Fair (70-51)		
Dist 4	CIRCLEDR	CIRCLE DR	010	N MADEIRA AVE	N SANBORN RD	C	A	2	2,835	37	104,895	**62**	03/03/23	64	70-61	Fair (70-51)	04/26/19	SLURRY SEAL
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	NB50	FREEDOM PKWY	BEACON HILL DR (N)	A	A	2	840	34	28,560	**62**	01/20/23	64	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 2	CROSSAVE	CROSS AVE	110	CROSS AVE	PALOMA AVE	R	A	1	225	20	4,500	**62**	03/15/23	63	70-61	Fair (70-51)		
Dist 2	DELMONTEAV	DEL MONTE AVE	050	WILLIAMS RD	END	R	A	2	1,084	42	45,528	**62**	02/02/23	63	70-61	Fair (70-51)		
Dist 6	EBORONDARD	E BORONDA RD	020EB	SAN JUAN GRADE RD	DARTMOUTH WAY	A	A	2	977	40	39,080	**62**	01/24/23	64	70-61	Fair (70-51)		
Dist 4	EMARKETST	E MARKET ST	080	N SANBORN RD	TOWT ST	A	A	4	1,658	60	99,480	**62**	01/26/23	64	70-61	Fair (70-51)	04/03/19	DEEP PATCH
Dist 4	EMENKEST	E MENKE ST	10	N MAIN ST	BRIDGE ST	R	A	2	341	42	14,322	**62**	03/17/23	63	70-61	Fair (70-51)	01/01/02	SLURRY SEAL
Dist 3	ESANJOAQUI	E SAN JOAQUIN ST	10	S MAIN ST	PAJARO ST	R	C	2	890	36	32,040	**62**	01/19/23	63	70-61	Fair (70-51)		
Dist 6	HARDENPKWY	HARDEN PKWY	EB030	MCKINNON ST	WINDSOR ST	C	A	2	938	28	26,264	**62**	10/05/23	62	70-61	Fair (70-51)	10/05/23	CHIP SEAL
Dist 2	LAGUARDIAS	LA GUARDIA ST	10	VANDENBERG ST	MOFFETT ST	R	A	2	1,889	41	77,449	**62**	01/17/23	64	70-61	Fair (70-51)	01/01/11	SLURRY SEAL
Dist 1	MANZANOWAY	MANZANO WAY	20	NOGAL DR	MANZANO CIR	R	A	2	407	31	12,631	**62**	02/01/23	63	70-61	Fair (70-51)		
Dist 5	NMAINST	N MAIN ST	010	RUSSELL RD	COP 900' S/O RUSSELL RD	A	A	4	900	85	76,500	**62**	02/09/23	64	70-61	Fair (70-51)		
Dist 3	SANTALUCIA	SANTA LUCIA AVE	15	ALAMEDA AVE	CARMEL AVE	R	P	2	917	34	31,178	**62**	01/24/23	63	70-61	Fair (70-51)		
Dist 5	SLOATDR	SLOAT DR	20	POTRERO WAY	COLTON DR	R	A	2	826	37	30,562	**62**	03/02/23	63	70-61	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 4	STCHARLESP	ST CHARLES PL	10	ST CHARLES WAY	END	R	A	2	187	32	5,984	**62**	03/03/23	63	70-61	Fair (70-51)	01/01/08	CAPE SEAL
Dist 4	VALLEJOST	VALLEJO ST	10	TAMPICO AVE	LINWOOD DR	R	A	2	1,003	32	32,096	**62**	02/17/23	63	70-61	Fair (70-51)	01/01/01	CAPE SEAL
Dist 5	WLAURELDR	W LAUREL DR	015	NMAIN ST	PARK SIDE ST	A	A	4	1,144	68	77,792	**62**	08/14/23	63	70-61	Fair (70-51)	08/14/23	SEAL CRACKS
Dist 5	ALVARADOCT	ALVARADO CT	10	ALVARADO DR (N)	ALVARADO DR (S)	R	A	2	999	32	31,973	**61**	08/15/23	62	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 1	CAMILLECT	CAMILLE CT	10	ATLANTIC ST	END	R	A	2	194	25	4,850	**61**	02/02/23	62	70-61	Fair (70-51)	01/01/07	CAPE SEAL
Dist 6	CASCADEWAY	CASCADE WAY	20	C.O.P.	KLAMATH DR	R	A	2	680	37	25,160	**61**	02/08/23	62	70-61	Fair (70-51)		
Dist 5	CHEROKEEDR	CHEROKEE DR	010	N MAIN ST	MADRID ST	C	A	2	2,035	42	85,470	**61**	02/16/23	63	70-61	Fair (70-51)		
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB50	LAS CASITAS	BEACON HILL DR (S)	A	A	2	843	34	33,150	**61**	01/20/23	63	70-61	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 3	GONZALESAL	GONZALES ALY	10	E GABILAN ST	E ALISAL ST	R	P	2	672	14	9,408	**61**	03/16/23	62	70-61	Fair (70-51)		
Dist 3	GREENWOODP	GREENWOOD PL	020	WOODSIDE DR	NORTH END	R	A	2	401	32	12,851	**61**	01/23/23	62	70-61	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 5	IRISDR	IRIS DR	35	LUPIN DR	TYLER ST	C	A	2	1,364	38	51,864	**61**	03/01/23	63	70-61	Fair (70-51)	03/11/19	DEEP PATCH
Dist 3	LOSLAURELE	LOS LAURELES AVE	10	SANTA LUCIA AVE	EL PASO PL	R	P	2	794	34	26,996	**61**	01/24/23	62	70-61	Fair (70-51)		
Dist 5	MASONWAY	MASON WAY	10	HOWE DR	LARKIN ST	R	A	2	249	32	7,973	**61**	08/15/23	62	70-61	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	MOFFETTST	MOFFETT ST	010	AIRPORT BLVD	LA GUARDIA ST	R	A	2	3,225	41	132,225	**61**	01/17/23	63	70-61	Fair (70-51)		
Dist 5	NMAINST	N MAIN ST	PCC025	E BORONDA RD	SAN JUAN GRADE RD	A	P	4	1,749	50	87,450	**61**	10/30/20	64	70-61	Fair (70-51)		
Dist 5&6	NMAINST	N MAIN ST	PCC035	SAN JUAN GRADE RD	HARDEN PKWY	A	P	4	1,280	50	64,000	**61**	10/30/20	64	70-61	Fair (70-51)		
Dist 5&6	NMAINST	N MAIN ST	PCC045	HARDEN PKWY	CHEROKEE DR	A	P	4	611	50	30,550	**61**	10/30/20	64	70-61	Fair (70-51)		
Dist 5&6	NMAINST	N MAIN ST	PCC055	CHEROKEE DR	E ALVIN DR	A	P	4	1,392	50	69,600	**61**	10/30/20	64	70-61	Fair (70-51)		
Dist 4&6	RAINIERDR	RAINIER DR	045	NATIVIDAD RD	LINWOOD DR	R	A	2	2,600	32	83,215	**61**	02/09/23	62	70-61	Fair (70-51)	12/15/20	SKIN PATCH
Dist 3	SANMIGUELA	SAN MIGUEL AVE	030	ALAMEDA AVE	SAN FERNANDO DR	C	A	2	739	35	25,865	**61**	01/19/23	63	70-61	Fair (70-51)		
Dist 3	SANPEDROST	SAN PEDRO ST	10	PAJARO ST	SAN CARLOS DR	R	A	2	1,208	26	31,408	**61**	01/19/23	62	70-61	Fair (70-51)	01/01/08	CAPE SEAL
Dist 4	STALBANSCT	ST ALBANS CT	15	ST EDWARDS AVE	CIRCLE DR	R	A	2	855	37	31,660	**61**	03/03/23	62	70-61	Fair (70-51)		
Dist 4	STEDWARDSA	ST EDWARDS AVE	15	E LAUREL DR	CIRCLE DR	C	A	2	2,688	42	112,930	**61**	03/03/23	63	70-61	Fair (70-51)	04/25/19	SLURRY SEAL
Dist 4	TAMPICOAVE	TAMPICO AVE	80	VALLEJO ST	ELWOOD ST	R	A	2	489	32	15,648	**61**	02/09/23	62	70-61	Fair (70-51)	09/16/19	DEEP PATCH
Dist 3	VILLAST	VILLA ST	20	WILSON ST	W MARKET ST	C	A	2	1,105	38	41,990	**61**	03/16/23	63	70-61	Fair (70-51)		
Dist 5	WLAURELDR	W LAUREL DR	025	PARK SIDE ST	TYLER ST	A	A	4	1,095	68	74,460	**61**	08/14/23	62	70-61	Fair (70-51)	08/14/23	SEAL CRACKS
Dist 3	WSANLUISST	W SAN LUIS ST	85	CAPITOL ST	WEST ST	R	P	2	638	34	21,722	**61**	01/25/23	62	70-61	Fair (70-51)		
Dist 1	ALAMOWAY	ALAMO WAY	20	LA HONDA CT (N)	GARNER AVE	R	A	2	1,378	37	50,986	**60**	02/02/23	61	60-51	Fair (70-51)		
Dist 3	CARMELAVE	CARMEL AVE	010	MAPLE ST	EL PASO PL	R	P	2	1,263	34	42,942	**60**	01/24/23	61	60-51	Fair (70-51)		
Dist 6	CHELSEACT	CHELSEA CT	10	WIMBLEDON AVE (W)	WIMBLEDON AVE (E)	R	A	2	1,476	32	47,232	**60**	02/08/23	61	60-51	Fair (70-51)		
Dist 1&6	CONSTITUTI	CONSTITUTION BLVD	SB40	FREEDOM PKWY	LAS CASITAS DR	A	A	2	1,189	34	40,426	**60**	01/20/23	62	60-51	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 4	DEERST	DEER ST	15	N MAIN ST	END	R	A	2	539	25	13,490	**60**	03/01/23	61	60-51	Fair (70-51)		
Dist 6	DOWNINGCIR	DOWNING CIR	10	DECLARATION ST	END	R	A	2	379	32	12,153	**60**	02/02/23	62	60-51	Fair (70-51)	04/26/19	SLURRY SEAL
Dist 6	HARDENPKWY	HARDEN PKWY	WB010	EL DORADO DR	WINDSOR ST	C	A	2	1,540	28	43,120	**60**	10/05/23	60	60-51	Fair (70-51)	10/05/23	CHIP SEAL
Dist 3	LODGEALLY	LODGE ALLY	10	E MARKET ST	END	R	P	2	173	15	2,606	**60**	01/26/23	61	60-51	Fair (70-51)		
Dist 3	LODGELN	LODGE LN	30	E ALISAL ST	E SAN LUIS ST	R	P	2	605	15	9,075	**60**	01/26/23	61	60-51	Fair (70-51)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 4	MARYALDR	MARYAL DR	30	E LAUREL DR	E BERNAL DR	C	A	2	2,714	37	100,418	**60**	02/17/23	62	60-51	Fair (70-51)	05/04/21	SLURRY SEAL
Dist 3	SANFERNAND	SAN FERNANDO CIR	10	SAN FERNANDO DR	END	R	A	2	252	32	8,089	**60**	01/19/23	61	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	SANMIGUELC	SAN MIGUEL CIR	10	SAN MIGUEL AVE	END	R	A	2	188	26	4,888	**60**	01/19/23	61	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	ABBOTTST	ABBOTT ST	110	HARRIS RD	CITY LIMITS	A	A	3	1,322	57	75,372	**59**	01/19/23	61	60-51	Fair (70-51)		
Dist 6	CHESWICKCI	CHESWICK CIR	10	WELLINGTON CT	END	R	A	2	390	32	12,503	**59**	02/02/23	61	60-51	Fair (70-51)	04/23/19	SLURRY SEAL
Dist 2	HEBBRONALY	HEBBRON ALY	10	S HEBBRON AVE	S FILICE ST	R	P	2	515	20	10,300	**59**	01/19/23	60	60-51	Fair (70-51)		
Dist 3	LOYOLADR	LOYOLA DR	25	UNIVERSITY AVE	ORINDA WAY	R	A	2	2,667	37	98,679	**59**	01/24/23	60	60-51	Fair (70-51)		
Dist 4	MCALLISTE1	MCALLISTER ST	15	BRIGHTON ST	VICTOR ST	R	A	2	1,649	32	52,780	**59**	03/02/23	60	60-51	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 6	MODOCAVE	MODOC AVE	10	RAINIER DR	E ALVIN DR	R	A	2	1,244	35	43,540	**59**	02/09/23	60	60-51	Fair (70-51)		
Dist 4	RAGSDALECT	RAGSDALE CT	40	RAGSDALE CT	ROOSEVELT ST	R	P	2	345	32	11,040	**59**	01/26/23	60	60-51	Fair (70-51)		
Dist 1	RIDERAVE	RIDER AVE	025	MIMBRERA WAY	ANTIGUA AVE	C	A	2	1,165	38	44,270	**59**	02/01/23	61	60-51	Fair (70-51)	03/07/19	DEEP PATCH
Dist 3	RIKERST	RIKER ST	020	320' S/O W MARKET ST	CENTRAL AVE	R	P	2	1,075	40	43,000	**59**	01/23/23	60	60-51	Fair (70-51)	06/18/19	DEEP PATCH
Dist 3	SANJUANDR	SAN JUAN DR	20	SAN MIGUEL AVE (E)	SAN MIGUEL DR (W)	R	A	2	2,084	32	66,688	**59**	01/19/23	60	60-51	Fair (70-51)		
Dist 3	ALAMEDAAVE	ALAMEDA AVE	015	ABBOTT ST	MAPLEWOOD DR	C	P	2	1,598	32	51,136	**58**	01/20/23	59	60-51	Fair (70-51)		
Dist 3	BRUNKENAVE	BRUNKEN AVE	10	SPICER ST	CHAMBERLAIN ST	R	A	2	567	42	23,814	**58**	01/18/23	59	60-51	Fair (70-51)		
Dist 1	CARICT	CARI CT	10	ATLANTIC ST	END	R	A	2	194	25	4,850	**58**	02/02/23	59	60-51	Fair (70-51)	03/11/19	DEEP PATCH
Dist 3	CHAUCERDR	CHAUCER DR	15	W END	E END	R	A	2	2,011	38	76,418	**58**	01/23/23	60	60-51	Fair (70-51)	05/09/19	SHALLOW PATCH
Dist 4	ELAURELDR	E LAUREL DR	020	GRANADA AVE	NATIVIDAD RD	A	A	4	645	58	37,410	**58**	01/19/23	60	60-51	Fair (70-51)		
Dist 3	ENCINADADR	ENCINADA DR	10	LA MESA DR	SAN JUAN DR	R	A	2	1,113	37	41,181	**58**	01/19/23	60	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 5	FLINTWAY	FLINT WAY	10	LARKIN ST	COLTON DR	R	A	2	259	32	8,308	**58**	03/01/23	59	60-51	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 1	GARNERAVE	GARNER AVE	020	RIDER AVE	N SANBORN RD	C	A	2	1,394	39	54,366	**58**	02/02/23	60	60-51	Fair (70-51)		
Dist 6	KLAMATHDR	KLAMATH DR	10	ARCADIA WAY	C.O.P.	R	A	2	365	37	13,505	**58**	02/08/23	59	60-51	Fair (70-51)		
Dist 3	LANGST	LANG ST	15	IVERSON ST	CAPITOL ST	R	P	2	1,330	40	53,200	**58**	01/25/23	59	60-51	Fair (70-51)		
Dist 5	LARKINST	LARKIN ST	035	KEARNY WAY	VICTOR ST	C	A	2	1,306	41	53,546	**58**	03/01/23	60	60-51	Fair (70-51)	05/15/19	SLURRY SEAL
Dist 6	MENDOCINOD	MENDOCINO DR	15	PLACER WAY	YOLO CIR	R	A	2	884	38	33,592	**58**	02/17/23	59	60-51	Fair (70-51)		
Dist 4&5	NMAINST	N MAIN ST	NB200	SANTA CLARA AVE	W BERNAL DR	A	A	3	729	36	26,244	**58**	02/10/23	60	60-51	Fair (70-51)	03/04/19	DEEP PATCH
Dist 3	NISSENRD	NISSEN RD	10	S MAIN ST	PADRE DR	C	A	2	617	43	26,531	**58**	01/23/23	60	60-51	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	PARKROW	PARK ROW	10	W ROMIE LN	W ACACIA ST	R	A	2	737	32	23,598	**58**	03/16/23	59	60-51	Fair (70-51)	03/19/19	SHALLOW PATCH
Dist 6	PLACERWAY	PLACER WAY	10	WESTMINSTER DR	MENDOCINO DR	R	A	2	698	40	27,920	**58**	02/17/23	59	60-51	Fair (70-51)		
Dist 4	RAGSDALECT	RAGSDALE CT	30	RAGSDALE CT	RAGSDALE CT	R	P	2	203	34	6,902	**58**	01/26/23	59	60-51	Fair (70-51)		
Dist 3	SANMATEOPL	SAN MATEO PL	10	SAN MATEO DR	END	R	A	2	201	32	6,432	**58**	01/19/23	59	60-51	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	SHELLEYWAY	SHELLEY WAY	10	KIPLING ST	KIPLING ST	R	A	2	863	32	27,628	**58**	01/23/23	59	60-51	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 4	STGEORGEDR	ST GEORGE DR	15	N MADEIRA AVE	ST REGIS WAY	R	A	2	1,342	32	42,944	**58**	03/03/23	59	60-51	Fair (70-51)		
Dist 3	ALEXANDERS	ALEXANDER ST	15	WEST ST	HOMESTEAD	R	P	2	639	34	21,726	**57**	03/15/23	58	60-51	Fair (70-51)		
Dist 3	ARCHERST	ARCHER ST	030	NACIONAL ST	VILLA ST	R	P	2	640	40	25,600	**57**	03/16/23	58	60-51	Fair (70-51)		
Dist 2	ARGENTINEC	ARGENTINE CIR	10	ARGENTINE DR	END	R	A	2	219	32	7,008	**57**	03/15/23	58	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 3	CALIFORNI1	CALIFORNIA ST	105B	MAPLE ST	E ACACIA ST	C	P	2	1,625	50	81,250	**57**	01/20/23	58	60-51	Fair (70-51)	11/12/19	DEEP PATCH
Dist 1	CTTNWDDR	COTTONWOOD DR	010	COTTONWOOD CT	END	R	A	2	1,145	33	37,785	**57**	02/01/23	58	60-51	Fair (70-51)	04/18/19	SLURRY SEAL
Dist 4	ELAKEST	E LAKE ST	15	N MAIN ST	CALIFORNIA ST	R	A	2	896	40	35,840	**57**	03/17/23	58	60-51	Fair (70-51)	05/25/22	HEAVY MAINTENANCE
Dist 4	EMARKETST	E MARKET ST	030EB	PCC END (S/O MARKET WAY)	MARKET WAY/ SHERWOOD DR	A	A	3	177	40	7,080	**57**	02/10/23	59	60-51	Fair (70-51)		
Dist 2	GARDENWAY	GARDEN WAY	15	S FILICE ST	MAGNOLIA DR	R	A	2	740	32	23,704	**57**	03/13/23	58	60-51	Fair (70-51)		
Dist 3	GREENFIELD	GREENFIELD ALY	020	E GABILAN ST	E ALISAL ST	R	P	2	671	32	21,472	**57**	01/26/23	58	60-51	Fair (70-51)		
Dist 3	HAPPPL	HAPP PL	10	W MARKET ST	END	R	A	2	256	49	12,544	**57**	03/15/23	58	60-51	Fair (70-51)		
Dist 6	HARDENPKWY	HARDEN PKWY	EB040	WINDSOR ST	EL DORADO DR	C	A	2	1,540	28	43,120	**57**	10/05/23	57	60-51	Fair (70-51)	10/05/23	CHIP SEAL
Dist 5	JACKSONST	JACKSON ST	10	VAN BUREN AVE	SWANER AVE	R	A	2	1,286	32	41,179	**57**	03/02/23	58	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 3	KIPLINGST	KIPLING ST	55	RIKER ST	LOS OLIVOS DR	R	A	2	2,803	32	89,708	**57**	01/23/23	58	60-51	Fair (70-51)	05/16/19	SLURRY SEAL
Dist 4	MCALLISTER	MCALLISTER CIR	10	MCALLISTER ST	END	R	A	2	185	32	5,920	**57**	03/02/23	58	60-51	Fair (70-51)	05/10/19	SLURRY SEAL
Dist 4	NMAINDR	N MAIN DR	10	CHAPARRAL ST	END	R	O	2	514	32	16,477	**57**	02/17/23	58	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 4&5	NMAINST	N MAIN ST	135SB	IRIS DR	W BERNAL DR	A	O	3	1,180	38	44,840	**57**	02/09/23	59	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 5&6	NMAINST	N MAIN ST	NB055	E ALVIN DR	CHEROKEE DR	A	A	1	1,392	47	65,424	**57**	02/09/23	59	60-51	Fair (70-51)		
Dist 4&5	NMAINST	N MAIN ST	NB125	IRIS DR	E LAUREL DR	A	A	3	2,231	38	84,778	**57**	02/09/23	59	60-51	Fair (70-51)		
Dist 3	PAJAROCIR	PAJARO CIR	10	PAJARO ST	END	R	A	2	198	32	6,340	**57**	01/19/23	58	60-51	Fair (70-51)	01/01/01	CAPE SEAL
Dist 5	QUINTEROCI	QUINTERO CIR	15	CHEROKEE DR	END	R	A	2	530	32	16,960	**57**	02/10/23	58	60-51	Fair (70-51)		
Dist 3	SANRAMONCI	SAN RAMON CIR	10	PAJARO ST	END	R	C	2	197	32	6,329	**57**	01/19/23	58	60-51	Fair (70-51)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	SANVINCENT	SAN VINCENTE AVE	030	W ACACIA ST	PALMA DR	C	A	2	924	32	29,568	**57**	01/24/23	59	60-51	Fair (70-51)		
Dist 5	WBERNALDR	W BERNAL DR	15	N MAIN ST	LUPIN DR	R	A	2	420	54	22,680	**57**	03/01/23	58	60-51	Fair (70-51)	06/03/22	FOG SEAL
Dist 6	ARCADIAWAY	ARCADIA WAY	15	COP	COP 335' E/O ARCADIA CT (N)	C	A	2	1,610	42	67,620	**56**	02/04/23	58	60-51	Fair (70-51)	03/06/19	DEEP PATCH
Dist 3	CENTRALAVE	CENTRAL AVE	095	CAPITOL ST	SALINAS ST	C	C	2	1,299	49	63,651	**56**	08/15/23	56	60-51	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 2	DENNISAVE	DENNIS AVE	15	TAMPA ST	BARDIN RD	R	A	2	2,180	34	74,120	**56**	03/15/23	57	60-51	Fair (70-51)		
Dist 4	DIVISIONST	DIVISION ST	15	SUMMIT DR	END	R	A	2	151	38	5,751	**56**	03/03/23	57	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	EBLANCORD	E BLANCO RD	WB20	BLANCO CIR	LA MESA WAY	A	A	2	3,462	34	117,708	**56**	01/18/23	58	60-51	Fair (70-51)		
Dist 6	EBORONDARD	E BORONDA RD	030	DARTMOUTH WAY	MCKINNON ST	A	A	2	1,534	48	73,632	**56**	01/24/23	58	60-51	Fair (70-51)		
Dist 5	ESTRADACT	ESTRADA CT	10	ESTRADA WAY (N)	ESTRADA WAY (S)	R	A	2	1,105	32	35,360	**56**	03/02/23	57	60-51	Fair (70-51)	05/09/19	SLURRY SEAL
Dist 2	PALOMAAVE	PALOMA AVE	10	QUILLA ST	E MARKET ST	R	A	2	1,216	40	48,640	**56**	03/13/23	57	60-51	Fair (70-51)	01/09/19	DEEP PATCH
Dist 4	RAMONAAVE	RAMONA AVE	10	E LAUREL DR	RAINIER DR	R	A	2	2,051	32	65,632	**56**	02/09/23	57	60-51	Fair (70-51)	06/24/19	DEEP PATCH
Dist 3	SANCARLOSD	SAN CARLOS DR	10	SAN PEDRO ST	SAN MIGUEL AVE	R	A	2	1,259	32	40,307	**56**	01/19/23	57	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 4	SHERWOODDR	SHERWOOD DR	025	E ROSSI ST	E MARKET ST	A	A	4	704	64	45,068	**56**	01/20/23	58	60-51	Fair (70-51)		
Dist 2	SILVERADOC	SILVERADO CIR	10	DEL MONTE AVE	END	R	A	2	185	32	5,950	**56**	03/15/23	57	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 2	SILVERWOOD	SILVERWOOD PL	10	DEL MONTE AVE	END	R	A	2	410	32	13,123	**56**	03/15/23	57	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 4	STCHARLESW	ST CHARLES WAY	10	N MADEIRA AVE	ST CHARLES PL	R	A	2	730	32	23,390	**56**	03/03/23	57	60-51	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 4	STMICHAELW	ST MICHAEL WAY	10	CIRCLE DR	N MADEIRA AVE	R	A	2	1,046	32	33,482	**56**	03/03/23	57	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 1	TWAINCIR	TWAIN CIR	10	LONGFELLOW DR	END	R	A	2	264	32	8,478	**56**	02/02/23	57	60-51	Fair (70-51)	01/01/00	REJUVENATION OIL
Dist 3	WROMIELN	W ROMIE LN	110	BAUTISTA DR	W ROMIE LN (S MISSION PARK)	A	A	2	677	32	21,664	**56**	01/20/23	58	60-51	Fair (70-51)	03/07/19	DEEP PATCH
Dist 4	BRIDGEST	BRIDGE ST	40	E LAKE ST	N END (WALL)	R	A	2	95	42	3,990	**55**	03/17/23	56	60-51	Fair (70-51)	01/01/86	CAPE SEAL
Dist 3	CHURCHST	CHURCH ST	50	W ALISAL ST	CENTRAL AVE	C	A	2	1,142	38	43,396	**55**	08/15/23	55	60-51	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 5	LARKINCIR	LARKIN CIR	10	LARKIN ST	END	R	A	2	410	32	13,120	**55**	08/15/23	56	60-51	Fair (70-51)	08/15/23	SCRUB/SLURRY SEAL
Dist 3	MANORDR	MANOR DR	15	GROVE ST	LOS PALOS DR	R	A	2	554	32	17,741	**55**	01/19/23	56	60-51	Fair (70-51)		
Dist 3	MONTEREYST	MONTEREY ST	010	JOHN ST	E SAN LUIS ST	A	A	2	526	48	25,248	**55**	01/25/23	57	60-51	Fair (70-51)	07/11/19	SHALLOW PATCH
Dist 6	NANTUCKETB	NANTUCKET BLVD	10	INDEPENDENCE BLVD	HEMINGWAY DR	C	A	2	2,292	38	87,096	**55**	02/02/23	57	60-51	Fair (70-51)		
Dist 6	NICHOLSAVE	NICHOLS AVE	10	LASSEN AVE	RAINIER DR	R	A	2	1,224	32	39,172	**55**	02/09/23	57	60-51	Fair (70-51)		
Dist 2	PEARLALY	PEARL ALY	20	220' E/O S PEARL ST	S HEBBRON AVE	R	P	2	170	20	3,400	**55**	01/19/23	56	60-51	Fair (70-51)		
Dist 2	SSANBORNRD	S SANBORN RD	SB010	E ALISAL ST	JOHN ST	A	A	2	1,325	25	33,125	**55**	01/18/23	57	60-51	Fair (70-51)		
Dist 6	SAUCITOAVE	SAUCITO AVE	10	PESCADERO DR	CAMBRIAN DR	R	A	2	878	32	28,108	**55**	02/04/23	56	60-51	Fair (70-51)	05/28/19	DEEP PATCH
Dist 3	SCHILLINGP	SCHILLING PL	15	HANSEN ST	END	R	A	2	2,543	32	81,407	**55**	01/17/23	56	60-51	Fair (70-51)		
Dist 4	SHERWOODDR	SHERWOOD DR	030	E ROSSI ST	101 Overpass (PCC START)	A	A	4	1,649	64	105,536	**55**	01/20/23	57	60-51	Fair (70-51)		
Dist 3	UNIVERSITY	UNIVERSITY AVE	30	CENTRAL AVE	ARCHER ST	R	A	2	263	40	10,520	**55**	01/25/23	56	60-51	Fair (70-51)	05/06/19	SHALLOW PATCH
Dist 4	AMADORCIR	AMADOR CIR	10	RAINIER DR	END	R	A	2	311	32	9,952	**54**	03/16/23	55	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 3	BRUNKENAVE	BRUNKEN AVE	30	MALARIN ST	END	R	A	2	855	42	35,910	**54**	01/18/23	55	60-51	Fair (70-51)	01/01/02	SLURRY SEAL
Dist 6	DARTMOUTHW	DARTMOUTH WAY	10	E BORONDA RD	S END (BARICADE)	R	A	2	364	41	14,924	**54**	03/01/23	55	60-51	Fair (70-51)		
Dist 3	EACACIAST	E ACACIA ST	020	PAJARO ST	CARMEL AVE	R	P	2	1,479	34	50,286	**54**	01/20/23	55	60-51	Fair (70-51)		
Dist 3	GEILST	GEIL ST	10	IVERSON ST	RIKER ST	R	P	2	1,038	40	41,520	**54**	10/27/20	57	60-51	Fair (70-51)		
Dist 5	IRISALY	IRIS ALY	20	IRIS DR	END	R	P	2	844	20	16,887	**54**	03/01/23	55	60-51	Fair (70-51)		
Dist 4	KERNST	KERN ST	20	N FREEWAY OFF RAMP	END	R	A	2	1,081	41	44,330	**54**	01/25/23	56	60-51	Fair (70-51)	10/30/19	SHALLOW PATCH
Dist 3	MONTECITOC	MONTECITO CIR	10	MONTECITO WAY	END	R	A	2	367	32	11,769	**54**	01/24/23	55	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 4&5	NMAINST	N MAIN ST	125SB	W LAUREL DR	IRIS DR	A	O	3	2,231	38	84,778	**54**	02/09/23	56	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 4&5	NMAINST	N MAIN ST	NB135	E BERNAL DR	IRIS DR	A	A	3	1,180	38	44,840	**54**	02/09/23	56	60-51	Fair (70-51)		
	NMAIN183	N. MAIN ST (SR-183)	070SB	START DIVIDED RD	END PCC	NCR	P	2	245	36	8,820	**54**	03/17/23	55	60-51	Fair (70-51)		
Dist 5	PRADOST	PRADO ST	20	PEREZ ST	NE END	R	A	2	665	32	21,284	**54**	03/02/23	55	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 3	RIOVERDEDR	RIO VERDE DR	10	LA MESA DR	SAN JUAN DR	R	A	2	1,633	32	52,265	**54**	01/19/23	55	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 2	SMADEIRAAV	S MADEIRA AVE	15	JAMES ST	E ALISAL ST	C	A	2	872	42	36,624	**54**	01/26/23	56	60-51	Fair (70-51)		
Dist 2	SSANBORNRD	S SANBORN RD	050NB	ELVEE DR	FAIRWAY AVE	A	A	2	433	26	11,258	**54**	01/18/23	56	60-51	Fair (70-51)	04/30/19	SEAL CRACKS
Dist 4	STREGISCIR	ST REGIS CIR	10	ST REGIS WAY	END	R	A	2	225	32	7,200	**54**	03/03/23	55	60-51	Fair (70-51)	01/01/08	CAPE SEAL
Dist 2	SYCAMORERD	SYCAMORE RD	15	PALOMA AVE	BARDIN RD	R	A	2	2,184	34	74,256	**54**	03/13/23	55	60-51	Fair (70-51)		
Dist 3	WSANLUISST	W SAN LUIS ST	55	CAPITOL ST	SALINAS ST	R	P	2	1,210	34	41,143	**54**	03/16/23	55	60-51	Fair (70-51)	01/29/19	DEEP PATCH
Dist 3	AIRPORTBLV	AIRPORT BLVD	110	800' N/O HANSEN ST	AIRPORT BLVD	C	A	1	595	24	14,280	**53**	01/23/23	56	60-51	Fair (70-51)		
Dist 2	ARGENTINEP	ARGENTINE PL	10	ARGENTINE DR	END	R	A	2	435	32	13,920	**53**	03/15/23	54	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 4	BRYANTCIR	BRYANT CIR	10	VAN NESS CT	END	R	A	2	260	32	8,320	**53**	02/09/23	54	60-51	Fair (70-51)	01/01/14	SLURRY SEAL
Dist 3	BUENAVISTA	BUENA VISTA ST	10	WILSON ST	PARK ST	R	P	2	637	40	25,488	**53**	03/16/23	54	60-51	Fair (70-51)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 5	CHEROKEEDR	CHEROKEE DR	030	SEVILLE ST	DURAN ST	C	A	2	581	42	24,402	**53**	02/16/23	55	60-51	Fair (70-51)		
Dist 2	CROSSAVE	CROSS AVE	010	E MARKET ST	PALOMA AVE (E)	R	A	2	465	38	17,670	**53**	03/15/23	54	60-51	Fair (70-51)		
Dist 3	DELREYCIR	DEL REY CIR	10	PADRE DR	END	R	A	2	463	32	14,835	**53**	01/23/23	54	60-51	Fair (70-51)	01/01/01	CAPE SEAL
Dist 3	EBLANCORD	E BLANCO RD	EB10	S MAIN ST	PAJARO ST	A	O	2	745	43	32,035	**53**	01/18/23	55	60-51	Fair (70-51)	01/01/06	2" OVERLAY
Dist 3	EBLANCORD	E BLANCO RD	EB30	SAN JUAN DR	LA MESA WAY	A	O	2	1,600	36	57,600	**53**	01/18/23	55	60-51	Fair (70-51)	01/01/06	2" OVERLAY
Dist 3	EBLANCORD	E BLANCO RD	WB30	LA MESA WAY	SAN JUAN DR	A	A	2	1,600	38	60,800	**53**	01/18/23	55	60-51	Fair (70-51)		
Dist 3	EBLANCORD	E BLANCO RD	WB40	SAN JUAN DR	PAJARO ST	A	A	2	1,679	36	60,444	**53**	01/18/23	55	60-51	Fair (70-51)		
Dist 3	HARKINSRD	HARKINS RD	030	DAYTON ST	RR TRACKS	C	A	2	899	47	42,253	**53**	01/17/23	56	60-51	Fair (70-51)		
Dist 3	HARVESTST	HARVEST ST	15	S MAIN ST	E END	R	P	2	2,414	46	111,044	**53**	01/20/23	54	60-51	Fair (70-51)	11/04/19	DEEP PATCH
Dist 3	IVERSONST	IVERSON ST	60	C.O.P.	W BLANCO RD	C	A	2	950	44	41,800	**53**	01/23/23	56	60-51	Fair (70-51)		
Dist 2	KENNETHAVE	KENNETH AVE	020	E LAUREL DR	E MARKET ST	R	O	2	425	36	15,300	**53**	03/13/23	54	60-51	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 2	MACHADOWAY	MACHADO WAY	10	ALMA AVE	KIMMEL ST	R	A	2	467	32	14,944	**53**	03/13/23	54	60-51	Fair (70-51)		
Dist 4	NMADEIRAAV	N MADEIRA AVE	010	W END (TREE BARRICADE)	ST EDWARDS AVE	R	A	2	2,243	37	82,991	**53**	03/03/23	54	60-51	Fair (70-51)		
Dist 5&6	NMAINST	N MAIN ST	055SB	CHEROKEE DR	W ALVIN DR	A	A	1	1,392	47	65,424	**53**	02/09/23	55	60-51	Fair (70-51)		
Dist 4&5	NMAINST	N MAIN ST	115SB	W CURTIS ST	W LAUREL DR	A	O	3	918	38	34,884	**53**	02/09/23	55	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 4&5	NMAINST	N MAIN ST	NB115	E LAUREL DR	E CURTIS ST	A	A	3	918	38	34,884	**53**	02/09/23	55	60-51	Fair (70-51)		
	NMAIN183	N. MAIN ST (SR-183)	060SB	END PCC BRIDGE	START PCC N/O CASENTINI	NCR	A	2	600	42	25,200	**53**	03/17/23	54	60-51	Fair (70-51)		
Dist 3	NISSENRD	NISSEN RD	25	PADRE DR	RIKER ST	C	A	2	950	43	40,850	**53**	01/23/23	55	60-51	Fair (70-51)		
Dist 3	PLAZACIR	PLAZA CIR	10	S MAIN ST	END	R	A	2	448	38	17,024	**53**	01/19/23	54	60-51	Fair (70-51)	01/01/01	SLURRY SEAL
Dist 3	RICOST	RICO ST	010	W LAKE ST	W ROSSI ST	C	A	2	545	41	22,345	**53**	03/01/23	55	60-51	Fair (70-51)		
Dist 2	SSANBORNRD	S SANBORN RD	070NB	JOHN ST	E ALISAL ST	A	O	2	1,325	33	43,725	**53**	01/18/23	55	60-51	Fair (70-51)	01/01/89	2" OVERLAY
Dist 2	SSANBORNRD	S SANBORN RD	SB030	FAIRWAY AVE	ELVEE DR	A	A	2	424	40	16,960	**53**	01/18/23	55	60-51	Fair (70-51)	04/30/19	SEAL CRACKS
Dist 3	WLAKEST	W LAKE ST	15	N MAIN ST	RICO ST	R	A	2	2,387	32	76,389	**53**	03/17/23	54	60-51	Fair (70-51)		
Dist 2	ARGENTINED	ARGENTINE DR	010	BARDIN RD	END	R	A	2	1,040	37	38,480	**52**	03/15/23	53	60-51	Fair (70-51)		
Dist 4	BRIDGEALY	BRIDGE ALY	10	MARKET WAY	E LAKE ST	R	P	2	561	18	10,111	**52**	03/17/23	53	60-51	Fair (70-51)		
Dist 4	BRIGHTONST	BRIGHTON ST	20	FILBERT WAY	MCALLISTER ST	R	A	2	436	32	13,968	**52**	03/02/23	53	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 3	BYRONDR	BYRON DR	10	CHAUCER DR	STEPHANIE DR	R	A	2	857	32	27,433	**52**	01/23/23	54	60-51	Fair (70-51)	05/01/19	SLURRY SEAL
Dist 3	CENTRALAVE	CENTRAL AVE	055	DAVIS RD	UNIVERSITY AVE	C	C	2	882	49	43,218	**52**	01/25/23	54	60-51	Fair (70-51)		
Dist 3	EBLANCORD	E BLANCO RD	EB40	LA MESA WAY	BLANCO CIR	A	O	2	3,483	36	125,388	**52**	01/18/23	54	60-51	Fair (70-51)	01/01/06	2" OVERLAY
Dist 4	ELAURELDR	E LAUREL DR	005	N MAIN ST	MARYAL DR	A	A	4	1,526	64	97,664	**52**	01/19/23	54	60-51	Fair (70-51)		
Dist 5	LARKINST	LARKIN ST	025	N DAVIS RD	KEARNY WAY	C	A	2	1,268	41	51,988	**52**	03/01/23	54	60-51	Fair (70-51)	05/14/19	SLURRY SEAL
Dist 4&5	NMAINST	N MAIN ST	095SB	NAVAJO DR	W CURTIS ST	A	O	3	1,433	32	45,856	**52**	02/09/23	54	60-51	Fair (70-51)	01/01/10	2" OVERLAY
Dist 3	PAJAROST	PAJARO ST	030	MAPLE ST	PINE ST	A	C	2	969	50	48,450	**52**	01/20/23	54	60-51	Fair (70-51)		
Dist 5	PEREZST	PEREZ ST	20	E BOLIVAR ST	END	R	A	2	822	36	29,592	**52**	03/02/23	53	60-51	Fair (70-51)		
Dist 3	PINEST	PINE ST	25	CARMEL AVE	S MAIN ST	R	P	2	2,271	34	77,214	**52**	01/20/23	53	60-51	Fair (70-51)	03/05/19	DEEP PATCH
Dist 3	SANVINCENT	SAN VINCENTE AVE	040	PALMA DR	W BLANCO RD	C	A	2	1,311	32	41,952	**52**	01/24/23	55	60-51	Fair (70-51)		
Dist 4	STREGISWAY	ST REGIS WAY	15	ST GEORGE DR	N END	R	A	2	810	32	25,920	**52**	03/03/23	53	60-51	Fair (70-51)		
Dist 1	TOWTST	TOWT ST	010	FREEDOM PARKWAY	MAE AVE	C	A	2	1,798	41	73,718	**52**	02/03/23	54	60-51	Fair (70-51)		
Dist 3	WGABILANST	W GABILAN ST	25	MAIN ST	LINCOLN AVE	R	A	2	608	32	19,464	**52**	01/26/23	54	60-51	Fair (70-51)		
Dist 3	WROMIELN	W ROMIE LN	020	W ROMIE LN (N MISSION PARK)	BAUTISTA DR	A	A	2	669	32	21,408	**52**	01/20/23	54	60-51	Fair (70-51)		
Dist 2	ACOSTAST	ACOSTA ST	10	N SANBORN RD	BEECH ST	R	A	2	1,236	32	39,552	**51**	03/13/23	52	60-51	Fair (70-51)		
Dist 3	BAUTISTADR	BAUTISTA DR	20	W ROMIE LN	W ACACIA ST	R	A	2	872	32	27,904	**51**	01/23/23	52	60-51	Fair (70-51)	02/26/19	DEEP PATCH
Dist 2	DELATORRE	DE LA TORRE ST	15	ROY DIAZ ST (N)	ROY DIAZ ST (S)	R	A	2	2,121	40	84,851	**51**	01/17/23	53	60-51	Fair (70-51)		
Dist 1	DOVERCIR	DOVER CIR	10	DE CUNHA CT	END	R	A	2	200	31	6,200	**51**	02/02/23	52	60-51	Fair (70-51)	01/01/08	SLURRY SEAL
Dist 3	EBLANCORD	E BLANCO RD	EB50	BLANCO CIR	ABBOTT ST	A	A	2	970	38	36,860	**51**	01/18/23	53	60-51	Fair (70-51)	01/01/86	SLURRY SEAL
Dist 4	EASTST	EAST ST	10	N HEBBRON AVE	N FILICE ST	R	A	2	564	41	23,124	**51**	03/13/23	52	60-51	Fair (70-51)		
Dist 3	EDENST	EDEN ST	10	SCHILLING PL	END	R	O	2	599	41	24,559	**51**	01/17/23	53	60-51	Fair (70-51)	01/15/19	DEEP PATCH
Dist 4	ELTONPL	ELTON PL	15	N HEBBRON AVE	END	R	A	2	834	29	24,203	**51**	03/13/23	52	60-51	Fair (70-51)		
Dist 4	HOLADAYAVE	HOLADAY AVE	10	E ALISAL ST	EAST ST	R	A	2	285	41	11,712	**51**	03/16/23	52	60-51	Fair (70-51)	01/01/07	SLURRY SEAL
Dist 5	PEREZCIR	PEREZ CIR	10	PEREZ ST	END	R	A	2	245	37	9,065	**51**	03/02/23	52	60-51	Fair (70-51)	01/01/07	CAPE SEAL
Dist 5	TAYLORST	TAYLOR ST	10	VAN BUREN AVE	COOLIDGE ST	R	A	2	502	32	16,071	**51**	03/02/23	52	60-51	Fair (70-51)	01/01/07	CAPE SEAL
	WMARKET183	W. MARKET ST (SR-183)	040	RIKER ST	MONTEREY ST	NCR	A	4	2,410	68	163,880	**51**	03/17/23	52	60-51	Fair (70-51)		
Dist 1	AMARILLOWA	AMARILLO WAY	010	NOGAL DR	RIDER AVE	R	A	2	875	38	33,250	**50**	02/01/23	52	50-41	Poor (50-31)		
Dist 5	BUSHST	BUSH ST	10	RICO ST	HYDE ST	R	A	2	1,294	32	41,408	**50**	02/09/23	52	50-41	Poor (50-31)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	CAPITOLST	CAPITOL ST	020	CENTRAL AVE	CLAY ST	C	P	2	2,260	40	90,400	**50**	03/15/23	51	50-41	Poor (50-31)	06/14/21	SKIN PATCH
Dist 4	DORORODR	DORORO DR	15	REATA ST	TAPADERO DR	R	A	2	1,067	32	34,166	**50**	02/09/23	52	50-41	Poor (50-31)	03/30/21	SKIN PATCH
Dist 5	FILLMOREST	FILLMORE ST	10	VAN BUREN AVE	TRUMAN ST	R	A	2	516	37	19,092	**50**	03/02/23	51	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	HARKINSRD	HARKINS RD	020	ABBOTT ST	DAYTON ST	C	A	4	2,372	80	189,760	**50**	01/17/23	53	50-41	Poor (50-31)	02/27/19	DEEP PATCH
Dist 4	JEFFERSONS	JEFFERSON ST	10	N HEBBRON AVE	N FILICE ST	R	A	2	562	42	23,619	**50**	03/13/23	51	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 4	KINGSST	KINGS ST	15	E MARKET ST	E ALISAL ST	R	A	2	1,155	42	48,537	**50**	01/19/23	51	50-41	Poor (50-31)		
Dist 3	LOSPALOSDR	LOS PALOS DR	25	ABBOTT ST	E ROMIE LN	R	C	2	1,412	37	52,244	**50**	01/19/23	51	50-41	Poor (50-31)		
Dist 2	MEADOWDR	MEADOW DR	15	JOHN ST (N)	JOHN ST (S)	R	A	2	2,200	32	70,400	**50**	01/19/23	52	50-41	Poor (50-31)	02/05/19	DEEP PATCH
Dist 2	MIAMIST	MIAMI ST	15	CROSS AVE	AFTON ROAD	R	A	2	1,121	35	39,235	**50**	03/13/23	51	50-41	Poor (50-31)		
Dist 4	MYRTLECT	MYRTLE CT	15	MYRTLE ST (N)	MYRTLE ST (S)	R	A	2	600	36	21,600	**50**	03/03/23	51	50-41	Poor (50-31)		
Dist 4	NFILICEST	N FILICE ST	15	ELTON PL	S END (BARRICADE)	R	A	2	1,475	39	57,525	**50**	03/13/23	51	50-41	Poor (50-31)		
Dist 4&5	NMAINST	N MAIN ST	NB095	E CURTIS ST	NAVAJO DR	A	A	3	1,433	38	54,454	**50**	02/09/23	52	50-41	Poor (50-31)		
Dist 4	RICOST	RICO ST	020	W ROSSI ST	HYDE ST	C	A	2	929	41	38,089	**50**	03/01/23	52	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 3	SSANBORNRD	S SANBORN RD	040NB	PELLETT AVE	ELVEE DR	A	A	2	1,830	20	36,600	**50**	01/18/23	52	50-41	Poor (50-31)	04/30/19	SEAL CRACKS
Dist 3	SALINASST	SALINAS ST	10	W MARKET ST	JOHN ST	A	C	2	2,336	37	86,432	**50**	01/26/23	52	50-41	Poor (50-31)		
Dist 3	SANMATEODR	SAN MATEO DR	15	SAN MIGUEL AVE	SAN TOMAS WAY	R	A	2	729	37	26,973	**50**	01/19/23	52	50-41	Poor (50-31)	02/07/19	DEEP PATCH
Dist 4	SHORTST	SHORT ST	10	E MARKET ST	N FILICE ST	R	A	2	436	32	13,978	**50**	03/13/23	51	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 2	TOROAVE	TORO AVE	15	BARDIN RD	E MARKET ST	R	A	2	2,903	35	101,605	**50**	03/15/23	51	50-41	Poor (50-31)	09/30/19	DEEP PATCH
Dist 5	TRUMANST	TRUMAN ST	15	EISENHOWER ST	ARTHUR ST	R	A	2	546	38	20,748	**50**	03/02/23	51	50-41	Poor (50-31)		
Dist 4&5	VANNESSCT	VAN NESS CT	10	VICTOR ST (W)	HYDE ST	R	A	2	717	37	26,529	**50**	02/09/23	52	50-41	Poor (50-31)		
Dist 3	VIAMARIA	VIA MARIA	15	END	ARCHER ST	R	A	2	1,531	32	49,015	**50**	03/16/23	51	50-41	Poor (50-31)	03/13/19	DEEP PATCH
Dist 5	VICTORCIR	VICTOR CIR	10	VICTOR ST	END	R	A	2	330	32	10,560	**50**	03/02/23	51	50-41	Poor (50-31)	05/14/19	SLURRY SEAL
Dist 3	ARCHERST	ARCHER ST	220	CAPITOL ST	CASSIDY ST	R	C	2	214	38	8,132	**49**	03/16/23	50	50-41	Poor (50-31)	01/01/10	2" OVERLAY
Dist 4	CENTERST	CENTER ST	15	E MARKET ST	EAST ST	R	A	2	906	38	34,428	**49**	03/16/23	50	50-41	Poor (50-31)		
Dist 3	CLARKST	CLARK ST	15	NACIONAL CT (S)	W MARKET ST	R	A	2	1,356	50	67,831	**49**	03/16/23	50	50-41	Poor (50-31)	03/26/19	DEEP PATCH
Dist 2	CROSSAVE	CROSS AVE	030	MIAMI ST	BARDIN RD	R	A	2	1,086	36	39,096	**49**	03/15/23	50	50-41	Poor (50-31)		
Dist 3	DICKENSCIR	DICKENS CIR	10	DICKENS DR	END	R	A	2	183	32	5,866	**49**	01/23/23	51	50-41	Poor (50-31)	05/17/19	SLURRY SEAL
Dist 3	EBLANCORD	E BLANCO RD	EB20	PAJARO ST	SAN JUAN DR	A	O	2	1,680	36	60,480	**49**	01/18/23	51	50-41	Poor (50-31)	01/01/06	2" OVERLAY
Dist 6	EBORONDARD	E BORONDA RD	050	EL DORADO DR	NATIVIDAD RD	A	A	2	2,926	45	131,670	**49**	01/24/23	51	50-41	Poor (50-31)		
Dist 5	GARDENIADR	GARDENIA DR	15	W BERNAL DR	LUPIN DR	R	A	2	1,884	32	60,300	**49**	03/01/23	51	50-41	Poor (50-31)	02/27/19	DEEP PATCH
Dist 4	LOMBARDCIR	LOMBARD CIR	10	LOMBARD ST	END	R	A	2	385	32	12,320	**49**	02/09/23	51	50-41	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 3	LORIMERST	LORIMER ST	10	CENTRAL AVE	W ALISAL ST	R	C	2	1,146	32	36,672	**49**	01/25/23	50	50-41	Poor (50-31)		
Dist 4	MADEIRACIR	MADEIRA CIR	10	N MADEIRA AVE	END	R	A	2	480	32	15,360	**49**	03/03/23	50	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 4	MARKETWAY	MARKET WAY	15	SHERWOOD DR	BRIDGE ST	R	A	2	1,117	37	41,350	**49**	03/17/23	50	50-41	Poor (50-31)	02/15/19	DEEP PATCH
Dist 4	NMADEIRAAV	N MADEIRA AVE	125	E ALISAL ST	E MARKET ST	R	A	2	1,157	40	46,280	**49**	03/13/23	50	50-41	Poor (50-31)		
Dist 4	NMADEIRAAV	N MADEIRA AVE	140	TERRACE ST	NE END (TREE BARRICADE)	R	A	2	1,471	41	60,311	**49**	03/13/23	50	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5&6	NMAINST	N MAIN ST	045SB	HARDEN PKWY	CHEROKEE DR	A	A	1	611	47	28,717	**49**	02/09/23	51	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	NB035	HARDEN PKWY	SAN JUAN GRADE RD	A	A	1	1,280	47	60,160	**49**	02/09/23	51	50-41	Poor (50-31)		
Dist 3	PAJAROST	PAJARO ST	040	PINE ST	E ROMIE LN	A	C	2	1,256	50	62,800	**49**	01/20/23	51	50-41	Poor (50-31)		
Dist 3	PARKST	PARK ST	010	CAPITOL ST	HOMESTEAD AVE	R	P	2	1,281	40	51,240	**49**	03/16/23	50	50-41	Poor (50-31)		
Dist 3	PRIMAVERAW	PRIMAVERA WAY	10	PRIMAVERA ST	KIPLING ST	R	A	2	726	32	23,232	**49**	01/23/23	51	50-41	Poor (50-31)	05/13/19	SLURRY SEAL
Dist 4	STMICHAELP	ST MICHAEL PL	10	ST MICHAEL WAY	END	R	A	2	176	32	5,651	**49**	03/03/23	50	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 2	SUNRISEST	SUNRISE ST	10	GARNER AVE	DEL MONTE AVE	R	A	2	1,547	32	49,514	**49**	02/03/23	51	50-41	Poor (50-31)	07/24/20	SKIN PATCH
Dist 3	TERVENAVE	TERVEN AVE	15	S SANBORN RD	AIRPORT BLVD	C	A	2	2,100	42	88,200	**49**	01/17/23	52	50-41	Poor (50-31)	02/20/19	DEEP PATCH
Dist 2	AIRPORTBLV	AIRPORT BLVD	010	SKYWAY BLVD	MERCER WAY	C	A	4	1,030	60	61,843	**48**	01/17/23	51	50-41	Poor (50-31)	05/24/19	DEEP PATCH
Dist 4	CARRAVE	CARR AVE	15	E MARKET ST	END	R	A	2	748	38	28,438	**48**	03/13/23	49	50-41	Poor (50-31)		
Dist 2	CARRIAGEDR	CARRIAGE DR	010	COUNTRYSIDE DR	CARRIAGE CT (N)	R	A	2	448	32	14,336	**48**	03/15/23	49	50-41	Poor (50-31)		
Dist 3	CENTRALAVE	CENTRAL AVE	085	HOMESTEAD AVE	CAPITOL ST	C	C	2	1,277	49	62,573	**48**	01/25/23	50	50-41	Poor (50-31)		
Dist 6	COVENTRYST	COVENTRY ST	15	GLENDORA WAY	BARICADE (N)	R	A	2	120	37	4,440	**48**	02/04/23	49	50-41	Poor (50-31)		
Dist 3	EBLANCORD	E BLANCO RD	WB50	PAJARO ST	S MAIN ST	A	A	2	745	42	31,290	**48**	01/18/23	50	50-41	Poor (50-31)		
Dist 4	ELAURELDR	E LAUREL DR	010	MARYAL DR	LINWOOD DR	A	A	4	852	64	54,528	**48**	01/19/23	50	50-41	Poor (50-31)	11/07/19	DEEP PATCH
Dist 3	HARRISRD	HARRIS RD	40	HARRIS PL	CITY LIMIT @ 1273' SW HARRIS PL;	C	A	2	1,273	42	53,466	**48**	01/17/23	51	50-41	Poor (50-31)		
Dist 4	MARYALDR	MARYAL DR	20	CHAPARRAL ST	E LAUREL DR	R	A	2	1,754	30	52,620	**48**	02/17/23	49	50-41	Poor (50-31)	04/28/21	SLURRY SEAL
Dist 3	MELODYLN	MELODY LN	20	W ALISAL ST	W SAN LUIS ST	R	P	2	630	15	9,450	**48**	01/26/23	49	50-41	Poor (50-31)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	MIDWAYAVE	MIDWAY AVE	20	E LAUREL DR	E MARKET ST	R	O	2	843	35	29,506	**48**	03/13/23	49	50-41	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 5	PIERCEST	PIERCE ST	10	NORTHRIDGE DR	SWANER AVE	R	A	2	464	32	14,848	**48**	03/17/23	49	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	SANJUANCIR	SAN JUAN CIR	10	SAN JUAN DR	END	R	A	2	202	25	5,050	**48**	01/19/23	50	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 5&6	SANJUANGRA	SAN JUAN GRADE RD	050	N MAIN ST	E BORONDA RD	A	A	2	1,640	38	62,320	**48**	02/09/23	50	50-41	Poor (50-31)	04/12/19	SHALLOW PATCH
Dist 3	SANTAANADR	SANTA ANA DR	10	GROVE ST (N)	GROVE ST (S)	R	A	2	895	32	28,640	**48**	01/24/23	50	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 4	STGEORGECI	ST GEORGE CIR	10	ST GEORGE DR	END	R	A	2	200	32	6,400	**48**	03/03/23	49	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 5	VICTORST	VICTOR ST	120	VAN NESS CT (E)	VAN NESS CT (W)	R	A	2	1,013	42	42,546	**48**	03/02/23	49	50-41	Poor (50-31)	05/15/19	SLURRY SEAL
Dist 5	WESTRIDGEP	WESTRIDGE PKWY	10	N DAVIS RD	WEST CITY LIMITS	A	A	4	1,261	78	98,358	**48**	02/10/23	50	50-41	Poor (50-31)	01/01/02	SLURRY SEAL
Dist 1	ACOSTAPLZ	ACOSTA PLZ	20	N SANBORN RD	END	R	A	2	270	42	11,340	**47**	02/02/23	49	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 5	CASTROST	CASTRO ST	10	N MAIN ST	W LAMAR ST	R	A	2	680	32	21,769	**47**	03/02/23	48	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	CHESTNUTST	CHESTNUT ST	20	PAJARO ST	CALIFORNIA ST	R	C	2	691	45	31,095	**47**	01/20/23	48	50-41	Poor (50-31)		
Dist 5	CUEVASCIR	CUEVAS CIR	10	CHEROKEE DR	END	R	A	2	337	32	10,811	**47**	02/10/23	48	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 3	DICKENSDR	DICKENS DR	15	KIPLING ST	COLERIDGE DR	R	A	2	740	32	23,680	**47**	01/23/23	49	50-41	Poor (50-31)	10/25/19	SEAL CRACKS
Dist 4	FREMONTST	FREMONT ST	15	N MADEIRA AVE	N HEBBRON AVE	R	A	2	1,837	32	58,805	**47**	03/13/23	48	50-41	Poor (50-31)	03/04/19	DEEP PATCH
Dist 3	HARKINSRD	HARKINS RD	040	RR TRACKS	CITY LIMIT	C	A	2	745	70	52,150	**47**	01/17/23	50	50-41	Poor (50-31)		
Dist 1	LAHONDACIR	LA HONDA CIR	10	LA HONDA CT	END	R	A	2	205	32	6,560	**47**	02/02/23	49	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	LASCRUCESC	LAS CRUCES CT	10	LAS CRUCES WAY	END	R	A	2	417	38	15,846	**47**	01/23/23	49	50-41	Poor (50-31)	05/14/19	SLURRY SEAL
Dist 6	LOSCOCHESA	LOS COCHES AVE	10	KLAMATH DR	HUMBOLDT DR	R	A	2	752	37	27,824	**47**	02/04/23	49	50-41	Poor (50-31)	02/20/19	DEEP PATCH
Dist 3	MARTELLAST	MARTELLA ST	20	W ROSSI ST	W LAKE ST	R	A	2	400	69	27,600	**47**	03/16/23	48	50-41	Poor (50-31)	03/06/19	DEEP PATCH
Dist 4&5	NMAINST	N MAIN ST	085SB	W ALVIN DR	NAVAJO DR	A	O	3	802	38	30,476	**47**	02/09/23	49	50-41	Poor (50-31)	01/01/10	2" OVERLAY
Dist 5	NMAINST	N MAIN ST	NB025	SAN JUAN GRADE RD	E BORONDA RD	A	A	1	1,749	47	82,203	**47**	02/09/23	49	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	NB045	CHEROKEE DR	HARDEN PKWY	A	A	1	611	47	28,717	**47**	02/09/23	49	50-41	Poor (50-31)		
Dist 6	NATIVIDADR	NATIVIDAD RD	080	E BORONDA RD	ROGGE RD	R	A	2	5,275	38	200,450	**47**	01/24/23	49	50-41	Poor (50-31)	08/23/19	DEEP PATCH
Dist 1	NWHMPSHCIR	NEW HAMPSHIRE CIR	10	NEW HAMPSHIRE CT	END	R	A	2	360	33	11,880	**47**	02/01/23	48	50-41	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 5	NORTHRIDG2	NORTHRIDGE WAY	10	NORTHRIDGE DR	SAN JUAN GRADE RD	R	A	2	130	37	4,810	**47**	03/02/23	48	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	PALMETTOST	PALMETTO ST	10	W MARKET ST	RAILROAD AVE	R	A	2	270	52	14,040	**47**	03/15/23	48	50-41	Poor (50-31)		
Dist 4	POWELLST	POWELL ST	15	W ROSSI ST	END	R	A	2	2,292	34	77,938	**47**	03/02/23	48	50-41	Poor (50-31)		
Dist 4	RINCONAVE	RINCON AVE	10	CENTER ST	EAST ST	R	A	2	700	32	22,413	**47**	03/13/23	48	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	SSANBORNRD	S SANBORN RD	SB040	ELVEE DR	PELLETT AVE	A	A	2	1,830	20	36,600	**47**	01/18/23	49	50-41	Poor (50-31)	04/30/19	SEAL CRACKS
Dist 3	SANANDREAS	SAN ANDREAS WAY	10	SAN JUAN DR	END	R	A	2	171	32	5,476	**47**	01/19/23	49	50-41	Poor (50-31)	07/16/19	DEEP PATCH
Dist 3	SANBLANCOC	SAN BLANCO CT	10	SAN BLANCO DR	END	R	A	2	246	32	7,883	**47**	01/23/23	49	50-41	Poor (50-31)	05/14/19	SLURRY SEAL
Dist 3	SANTAFEWAY	SANTA FE WAY	15	SANTA MONICA WAY	SAN FELIPE ST	R	A	2	644	38	24,472	**47**	01/24/23	49	50-41	Poor (50-31)	06/06/19	DEEP PATCH
Dist 4	SOLEDADST	SOLEDAD ST	110	E LAKE ST	E GABILAN ST	R	A	2	678	32	21,719	**47**	02/19/21	52	50-41	Poor (50-31)	02/19/21	SKIN PATCH
Dist 4	STTHOMASWA	ST THOMAS WAY	10	ST GEORGE DR	ST EDWARDS AVE	R	A	2	297	32	9,518	**47**	03/03/23	48	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 3	VERTINAVE	VERTIN AVE	010	INDUSTRIAL ST	TERVEN AVE	R	A	2	1,636	42	68,712	**47**	01/17/23	49	50-41	Poor (50-31)		
Dist 2	ACOSTAST	ACOSTA ST	110	BEECH ST	TOWT ST	R	A	2	405	40	16,200	**46**	03/13/23	47	50-41	Poor (50-31)		
Dist 5	ARTHURST	ARTHUR ST	15	CLEVERLAND AVE	END	R	A	2	2,200	32	70,406	**46**	03/02/23	47	50-41	Poor (50-31)		
Dist 4	BUSHST	BUSH ST	20	HYDE ST	S END	R	A	2	210	32	6,720	**46**	02/09/23	48	50-41	Poor (50-31)		
Dist 2	CARRIAGECT	CARRIAGE CT	10	CARRIAGE DR (N)	CARRIAGE DR (S)	R	A	2	786	32	25,152	**46**	03/15/23	47	50-41	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 1	DELMONTEAV	DEL MONTE AVE	010	RIDER AVE	N SANBORN RD	C	O	2	1,404	42	58,968	**46**	02/02/23	48	50-41	Poor (50-31)	08/09/19	DEEP PATCH
Dist 3	HARRISRD	HARRIS RD	10	ABBOTT ST	HARRIS PL	C	A	2	982	45	44,190	**46**	01/17/23	49	50-41	Poor (50-31)	06/06/19	DEEP PATCH
Dist 2	HAVENALY	HAVEN ALY	030	GRANDHAVEN ST	BELLEHAVEN ST	R	P	2	304	21	6,384	**46**	03/13/23	47	50-41	Poor (50-31)		
Dist 5	KENNEDYST	KENNEDY ST	15	VAN BUREN AVE	BUCHANAN WAY	R	A	2	524	37	19,388	**46**	03/02/23	47	50-41	Poor (50-31)	01/14/19	DEEP PATCH
Dist 3	LAMESADR	LA MESA DR	060	PAJARO ST	SAN JUAN DR	R	A	2	1,677	37	62,049	**46**	01/18/23	48	50-41	Poor (50-31)	05/16/19	DEEP PATCH
Dist 3	MAPLEWOODD	MAPLEWOOD DR	30	GROVE ST	SIERRA DR	R	A	2	391	32	12,523	**46**	01/19/23	48	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	MONTEREYST	MONTEREY ST	030	E ALISAL ST	E MARKET ST	A	A	2	1,361	48	65,328	**46**	01/25/23	48	50-41	Poor (50-31)	10/18/19	DEEP PATCH
Dist 4	NOICEDR	NOICE DR	10	NAVAJO DR	CHAPARRAL ST	R	A	2	600	41	24,617	**46**	02/16/23	48	50-41	Poor (50-31)	04/18/19	SHALLOW PATCH
Dist 3	PAJAROST	PAJARO ST	020	JOHN ST	MAPLE ST	A	C	2	974	50	48,700	**46**	01/20/23	48	50-41	Poor (50-31)		
Dist 3	PARKST	PARK ST	020	HOMESTEAD AVE	NACIONAL ST	R	P	2	1,278	40	51,120	**46**	03/16/23	47	50-41	Poor (50-31)	08/01/19	SHALLOW PATCH
Dist 4	RAINIERDR	RAINIER DR	015	SHIRES WAY	LINWOOD DR	R	A	2	892	32	28,568	**46**	02/09/23	47	50-41	Poor (50-31)	03/26/19	DEEP PATCH
Dist 3	SSANBORNRD	S SANBORN RD	SB050	PELLETT AVE	RAILROAD Overpass (PCC START)	A	A	2	227	20	4,540	**46**	01/18/23	48	50-41	Poor (50-31)		
Dist 3	SANYSIDROW	SAN YSIDRO WAY	10	AMBROSE DR	MONTECITO WAY	R	A	2	629	41	25,789	**46**	01/24/23	48	50-41	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 5	SWANERCIR	SWANER CIR	10	SWANER AVE	END	R	A	2	195	28	5,460	**46**	03/02/23	48	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 4	TERRACEST	TERRACE ST	15	N MADEIRA AVE	FREMONT ST	R	A	2	1,625	32	52,000	**46**	03/13/23	47	50-41	Poor (50-31)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 6	TETONAVE	TETON AVE	10	RAINIER DR	GLACIER DR	R	A	2	995	32	31,859	**46**	02/09/23	48	50-41	Poor (50-31)	01/07/19	DEEP PATCH
Dist 3	BRIARWOODP	BRIARWOOD PL	15	END	END	R	A	2	720	32	23,040	**45**	01/23/23	47	50-41	Poor (50-31)		
Dist 4	BRIGHTONST	BRIGHTON ST	10	STEVENSON ST	FILBERT WAY	R	A	2	478	32	15,300	**45**	03/02/23	46	50-41	Poor (50-31)		
Dist 1	CST	C ST	010	MAE AVE	GALINDO ST	R	A	2	847	32	27,119	**45**	02/03/23	47	50-41	Poor (50-31)		
Dist 3	CAPITOLST	CAPITOL ST	010	W MARKET ST	CENTRAL ST	C	P	2	1,170	40	46,800	**45**	03/15/23	46	50-41	Poor (50-31)		
Dist 1	EBANOPL	EBANO PL	10	RANCHERO DR	END	R	A	2	203	32	6,525	**45**	02/02/23	47	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 5	HOOVERST	HOOVER ST	15	EISENHOWER ST	SOUZA WAY	R	A	2	1,394	32	44,623	**45**	03/02/23	46	50-41	Poor (50-31)		
Dist 3	IVERSONCIR	IVERSON CIR	10	IVERSON ST	END	R	A	2	285	32	9,144	**45**	01/23/23	47	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 5	KENNEDYST	KENNEDY ST	35	BUCHANAN WAY	END	R	A	2	1,655	33	54,615	**45**	03/02/23	47	50-41	Poor (50-31)		
Dist 6	LASSENAVE	LASSEN AVE	15	E ALVIN DR	RAINIER DR	R	A	2	1,246	38	47,348	**45**	02/09/23	46	50-41	Poor (50-31)		
Dist 3	LOSPALOSDR	LOS PALOS DR	30	E ROMIE LN	SAN JOSE ST	C	A	2	607	37	22,459	**45**	01/19/23	48	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 4	NHEBBRONAV	N HEBBRON AVE	45	E MARKET ST	ELTON PL	R	A	2	566	38	21,539	**45**	03/13/23	46	50-41	Poor (50-31)	03/06/19	DEEP PATCH
Dist 4	NMADEIRAAV	N MADEIRA AVE	020	ST EDWARDS AVE	HILL CIR	R	A	2	1,637	37	60,569	**45**	03/03/23	46	50-41	Poor (50-31)		
Dist 4	OCONNORCIR	OCONNOR CIR	10	ST BRENDAN WAY	ROSARITA DR	R	A	2	871	32	27,890	**45**	02/17/23	46	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 4	RIANDAST	RIANDA ST	10	GRIFFIN ST	PRADER ST	R	A	2	918	37	33,990	**45**	01/18/23	47	50-41	Poor (50-31)	01/31/19	DEEP PATCH
Dist 4&5	RICOST	RICO ST	030	HYDE ST	CASENTINI ST	C	A	2	389	41	15,949	**45**	03/01/23	48	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 1	SIEBERST	SIEBER ST	15	PACIFIC AVE	GARNER AVE	R	A	2	814	22	17,908	**45**	02/02/23	47	50-41	Poor (50-31)		
Dist 3	WACACIAST	W ACACIA ST	020	RIKER ST	JUNIPERO WAY	C	A	2	1,356	37	50,172	**45**	01/25/23	48	50-41	Poor (50-31)		
Dist 3	WACACIAST	W ACACIA ST	030	JUNIPERO WAY	W ALISAL ST	C	A	2	2,299	37	85,063	**45**	01/25/23	48	50-41	Poor (50-31)	07/05/19	DEEP PATCH
Dist 3&4	WROSSIST	W ROSSI ST	055	VICTOR ST	N DAVIS RD	A	A	2	1,346	54	72,684	**45**	01/25/23	47	50-41	Poor (50-31)		
	WMARKET183	W. MARKET ST (SR-183)	030	CLARK ST	RIKER ST	NCR	A	4	2,890	58	167,620	**45**	03/17/23	46	50-41	Poor (50-31)		
Dist 3	WESTST	WEST ST	090	LANG ST	GEIL ST	R	A	2	323	32	10,344	**45**	01/25/23	47	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 1	WHITMANCIR	WHITMAN CIR	10	LONGFELLOW DR	END	R	A	2	420	32	13,440	**45**	02/02/23	47	50-41	Poor (50-31)	01/01/00	REJUVENATION OIL
Dist 2	WILLIAMSRD	WILLIAMS RD	055	BARDIN RD	DEL MONTE AVE	A	A	4	971	76	73,815	**45**	01/18/23	47	50-41	Poor (50-31)	01/03/19	DEEP PATCH
Dist 3	WILLOWST	WILLOW ST	15	S MAIN ST	CALIFORNIA ST	R	P	2	1,463	32	46,816	**45**	01/20/23	46	50-41	Poor (50-31)		
Dist 2	1STAVE	1ST AVE	20	E MARKET ST	E LAUREL DR	R	A	2	650	36	23,400	**44**	03/13/23	45	50-41	Poor (50-31)	04/26/19	SLURRY SEAL
Dist 3	AMBROSEDR	AMBROSE DR	010	DAVIS RD	W ALISAL ST	R	A	2	2,239	42	94,038	**44**	01/24/23	46	50-41	Poor (50-31)	05/28/19	DEEP PATCH
Dist 1	ATLANTICST	ATLANTIC ST	15	GARNER AVE	DEL MONTE AVE	R	A	2	1,546	32	49,472	**44**	02/02/23	46	50-41	Poor (50-31)		
Dist 4	CALIFORNI1	CALIFORNIA ST	010	S. END	MARKET WAY	R	A	2	166	25	4,150	**44**	03/17/23	45	50-41	Poor (50-31)		
Dist 3	CORONADOAV	CORONADO AVE	10	WILSON ST	SANTA BARBARA AVE	R	A	2	536	32	17,167	**44**	03/16/23	45	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	HUMBOLDTDR	HUMBOLDT DR	15	YREKA DR	TRUCKEE WAY	R	A	2	1,548	37	57,276	**44**	02/08/23	46	50-41	Poor (50-31)	02/14/19	DEEP PATCH
Dist 5	JACKSONCIR	JACKSON CIR	10	SWANER AVE	END	R	A	2	165	27	4,455	**44**	03/02/23	45	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	MONTECITOW	MONTECITO WAY	15	W ALISAL ST	KENTFIELD DR	R	A	2	953	37	35,261	**44**	01/24/23	46	50-41	Poor (50-31)		
Dist 3	MONTEREYST	MONTEREY ST	020	E SAN LUIS ST	E ALISAL ST	A	A	2	677	48	32,496	**44**	01/25/23	46	50-41	Poor (50-31)	07/03/19	DEEP PATCH
Dist 4	NSANBORNRD	N SANBORN RD	70	OREGON ST	E MARKET ST	A	A	2	2,580	65	167,759	**44**	01/18/23	46	50-41	Poor (50-31)	11/12/19	DEEP PATCH
Dist 4	NSANBORNRD	N SANBORN RD	80	E MARKET ST	E ALISAL ST	A	A	4	1,308	65	85,020	**44**	01/18/23	46	50-41	Poor (50-31)	03/18/19	SHALLOW PATCH
Dist 3	NACIONALST	NACIONAL ST	20	PARK ST	CENTRAL AVE	R	P	2	640	40	25,600	**44**	03/16/23	45	50-41	Poor (50-31)	11/05/19	DEEP PATCH
Dist 3	OAKST	OAK ST	15	S MAIN ST	E END	R	P	2	2,074	34	70,516	**44**	01/20/23	45	50-41	Poor (50-31)		
Dist 3	PALMADR	PALMA DR	020	W ALISAL ST	IVERSON ST	R	C	2	3,060	38	116,280	**44**	01/24/23	46	50-41	Poor (50-31)		
Dist 4	ROOSEVELTS	ROOSEVELT ST	15	KERN ST	N PEARL ST	R	A	2	2,049	41	84,009	**44**	01/19/23	46	50-41	Poor (50-31)		
Dist 3	SSANBORNRD	S SANBORN RD	SB070	RAILROAD Overpass (PCC END)	ABBOTT ST	A	A	2	980	30	29,400	**44**	01/18/23	46	50-41	Poor (50-31)	01/01/82	1-1/2" OVERLAY
Dist 4	STFRANCISW	ST FRANCIS WAY	15	SORRENTINI DR	ROSARITA DR	R	A	2	1,714	32	54,859	**44**	02/17/23	46	50-41	Poor (50-31)		
Dist 5	SWANERAVE	SWANER AVE	15	SANTA RITA ST	VAN BUREN AVE	R	A	2	2,126	38	80,788	**44**	03/02/23	45	50-41	Poor (50-31)	03/22/21	SKIN PATCH
Dist 3	WOODSIDECI	WOODSIDE CIR	10	WOODSIDE DR	END	R	A	2	172	32	5,525	**44**	01/23/23	46	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	BAUTISTADR	BAUTISTA DR	10	ORANGE DR	W ROMIE LN	R	A	2	563	32	18,016	**43**	01/23/23	45	50-41	Poor (50-31)	07/16/19	DEEP PATCH
Dist 4	CALIFORNI1	CALIFORNIA ST	030	E LAKE ST	E ROSSI ST	R	P	2	155	52	8,060	**43**	03/17/23	44	50-41	Poor (50-31)	04/26/19	DEEP PATCH
Dist 1	CHARROWAY	CHARRO WAY	10	ALAMO WAY	RIDER AVE	R	A	2	302	38	11,476	**43**	02/02/23	45	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 5	CHEROKEEDR	CHEROKEE DR	060	INCA WAY	TULANE ST	C	A	2	2,170	38	82,460	**43**	02/16/23	46	50-41	Poor (50-31)	05/09/19	SLURRY SEAL
Dist 5	COOLIDGEST	COOLIDGE ST	10	HOOVER ST	TAYLOR ST	R	A	2	494	32	15,816	**43**	03/02/23	44	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 2	COUNTRYSID	COUNTRYSIDE DR	15	BARDIN RD	EAST END	R	A	2	915	40	36,600	**43**	03/15/23	44	50-41	Poor (50-31)		
Dist 6	EBORONDARD	E BORONDA RD	040	MCKINNON ST	EL DORADO DR	A	A	2	3,044	45	136,980	**43**	01/24/23	45	50-41	Poor (50-31)		
Dist 1&6	EBORONDARD	E BORONDA RD	070	INDEPENDENCE BLVD	HEMINGWAY DR	A	A	2	2,199	45	98,955	**43**	01/24/23	45	50-41	Poor (50-31)		
Dist 2	ELAURELDR	E LAUREL DR	035	TOWT ST	WILLIAMS RD	A	A	2	1,686	42	70,812	**43**	01/19/23	45	50-41	Poor (50-31)		
Dist 1	JOSEPHINES	JOSEPHINE ST	15	C ST	END	R	A	2	632	32	20,250	**43**	02/03/23	45	50-41	Poor (50-31)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	LASCASITAS	LAS CASITAS DR	10	CONSTITUTION BLVD	RANCHERO DR	C	A	2	1,552	38	58,980	**43**	02/10/23	46	50-41	Poor (50-31)	03/06/19	DEEP PATCH
Dist 2	MAGNOLIADR	MAGNOLIA DR	10	GARDEN WAY	MEADOW DR	R	A	2	1,050	32	33,600	**43**	01/19/23	45	50-41	Poor (50-31)	05/21/19	DEEP PATCH
Dist 1	MIMBRERACI	MIMBRERA CIR	10	MIMBRERA WAY	END	R	A	2	330	31	10,230	**43**	02/01/23	45	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 4	NHEBBRONAV	N HEBBRON AVE	15	E ALISAL ST	E MARKET ST	C	A	2	1,149	40	45,960	**43**	03/13/23	45	50-41	Poor (50-31)		
Dist 5	NMAINST	N MAIN ST	025SB	E BORONDA RD	SAN JUAN GRADE RD	A	A	1	1,749	32	55,968	**43**	02/09/23	45	50-41	Poor (50-31)		
Dist 5&6	NMAINST	N MAIN ST	035SB	SAN JUAN GRADE RD	HARDEN PKWY	A	A	1	1,280	32	40,960	**43**	02/09/23	45	50-41	Poor (50-31)		
Dist 4&5	NMAINST	N MAIN ST	NB085	NAVAJO DR	E ALVIN DR	A	A	3	802	38	30,476	**43**	02/09/23	45	50-41	Poor (50-31)		
Dist 4	NPEARLST	N PEARL ST	15	E MARKET ST	E ALISAL ST	R	A	2	1,146	36	41,256	**43**	03/13/23	44	50-41	Poor (50-31)	03/04/19	DEEP PATCH
Dist 1	PACIFICAVE	PACIFIC AVE	20	DEL MONTE AVE	AMARILLO WAY	R	A	2	1,154	38	43,852	**43**	02/02/23	45	50-41	Poor (50-31)		
Dist 1	PINOWAY	PINO WAY	10	LAS CASITAS DR	ALAMO WAY	R	A	2	832	32	26,638	**43**	02/02/23	45	50-41	Poor (50-31)	01/01/07	CAPE SEAL
Dist 6	RAMONAAVE	RAMONA AVE	20	RAINIER DR	GLACIER DR	R	A	2	997	32	31,904	**43**	02/09/23	45	50-41	Poor (50-31)		
Dist 1	RHDISLDCIR	RHODE ISLAND CIR	10	RHODE ISLAND ST	END	R	A	2	285	33	9,405	**43**	02/01/23	45	50-41	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 3	RIKERCIR	RIKER CIR	10	RIKER ST	END	R	A	2	126	32	4,035	**43**	01/23/23	45	50-41	Poor (50-31)	05/20/19	SLURRY SEAL
Dist 3	RIKERST	RIKER ST	110	W ALISAL ST	CLAY ST	A	P	2	1,116	40	44,640	**43**	01/23/23	44	50-41	Poor (50-31)	10/31/19	DEEP PATCH
Dist 3	SANJOSEST	SAN JOSE ST	010	LOS PALOS DR	WILGART WAY	R	C	2	810	37	29,970	**43**	02/10/23	44	50-41	Poor (50-31)		
Dist 6	SARATOGACI	SARATOGA CIR	10	SARATOGA DR	END	R	A	2	232	32	7,432	**43**	02/04/23	45	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5	SEGOVIACIR	SEGOVIA CIR	10	MADRID ST	END	R	A	2	287	32	9,210	**43**	02/10/23	45	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 5	SEPULVEDAC	SEPULVEDA CIR	10	SEPULVEDA DR	END	R	A	2	325	32	10,400	**43**	02/17/23	45	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 4	TOYONAVE	TOYON AVE	10	REATA ST	TAPADERO DR	R	A	2	725	38	27,564	**43**	02/09/23	45	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 4	BRIDGEST	BRIDGE ST	50	E LAKE ST	MARKET WAY	R	P	2	416	45	18,758	**42**	03/17/23	43	50-41	Poor (50-31)		
Dist 5	CLAREMONTS	CLAREMONT ST	10	ROCHEX AVE	W LAUREL DR	R	A	2	457	32	14,633	**42**	02/16/23	44	50-41	Poor (50-31)	01/01/01	CAPE SEAL
Dist 4	ELAURELDR	E LAUREL DR	015	LINWOOD DR	GRANADA AVE	A	A	4	1,128	58	65,424	**42**	01/19/23	44	50-41	Poor (50-31)	11/08/19	DEEP PATCH
Dist 1	HAWAIIPL	HAWAII PL	10	CARIBBEAN AVE	E END	R	A	2	398	25	9,957	**42**	02/02/23	44	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	LAMESADR	LA MESA DR	070	SAN JUAN DR	LA MESA WAY	R	A	2	1,597	37	59,089	**42**	01/18/23	44	50-41	Poor (50-31)	05/16/19	DEEP PATCH
Dist 6	LOSCOCHESC	LOS COCHES CIR	10	LOS COCHES AVE	END	R	A	2	326	32	10,447	**42**	02/08/23	44	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 1	MANZANOCIR	MANZANO CIR	10	MIMBRERA WAY	END	R	A	2	482	31	14,954	**42**	02/01/23	44	50-41	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	MELROSEDR	MELROSE DR	10	BELMONT DR	PARK ST	R	A	2	736	32	23,578	**42**	03/17/23	43	50-41	Poor (50-31)	03/25/19	SHALLOW PATCH
Dist 4	MYRTLEST	MYRTLE ST	10	TOWT ST	CIRCLE DR	R	A	2	899	30	26,970	**42**	03/03/23	43	50-41	Poor (50-31)	01/24/19	DEEP PATCH
Dist 1	NOGALCIR	NOGAL CIR	10	NOGAL DR	END	R	A	2	260	31	8,060	**42**	02/01/23	44	50-41	Poor (50-31)	01/01/08	CAPE SEAL
Dist 1	NOGALDR	NOGAL DR	020	FREEDOM PKWY	MIMBRERA WAY	C	A	2	1,638	38	62,244	**42**	02/01/23	45	50-41	Poor (50-31)		
Dist 5	POLKST	POLK ST	20	W LAUREL DR	TYLER ST	R	A	2	2,237	32	71,614	**42**	02/17/23	44	50-41	Poor (50-31)		
Dist 2	SSANBORNRD	S SANBORN RD	SB020	JOHN ST	FAIRVIEW AVE	A	A	2	792	40	31,680	**42**	01/18/23	44	50-41	Poor (50-31)	04/30/19	SEAL CRACKS
Dist 3	SANMIGUELA	SAN MIGUEL AVE	010	S MAIN ST	PAJARO ST	R	O	2	843	56	47,208	**42**	01/19/23	44	50-41	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 3	SANMIGUELA	SAN MIGUEL AVE	020	PAJARO ST	ALAMEDA AVE	C	A	2	1,924	32	61,568	**42**	01/19/23	45	50-41	Poor (50-31)	11/12/19	DEEP PATCH
Dist 4	SIMASST	SIMAS ST	15	E MARKET ST	END	R	A	2	732	38	27,834	**42**	03/17/23	43	50-41	Poor (50-31)	01/14/19	DEEP PATCH
Dist 4	TAMPICOAVE	TAMPICO AVE	90	ELWOOD ST	RAINIER DR	R	A	2	1,261	32	40,352	**42**	02/09/23	44	50-41	Poor (50-31)	03/11/19	DEEP PATCH
Dist 4	WMENKEST	W MENKE ST	10	MARTELLA ST	N MAIN ST	R	A	2	305	48	14,669	**42**	03/17/23	43	50-41	Poor (50-31)	07/16/21	SLURRY SEAL
Dist 3	WROMIELN	W ROMIE LN	030	BAUTISTA DR	END	C	A	2	800	32	25,600	**42**	01/20/23	45	50-41	Poor (50-31)		
Dist 2	ANDINACIR	ANDINA CIR	10	ANDINA DR	END	R	A	2	190	32	6,080	**41**	03/15/23	42	50-41	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 4	BOLEROAVE	BOLERO AVE	15	E LAUREL DR	CHAPARRAL ST	R	A	2	1,793	32	57,377	**41**	02/09/23	43	50-41	Poor (50-31)	06/24/19	DEEP PATCH
Dist 3	CAMDENWAY	CAMDEN WAY	020	W ACACIA ST	CARMELITA DR	R	A	2	538	32	17,216	**41**	01/25/23	43	50-41	Poor (50-31)		
Dist 1	CARIBBEANA	CARIBBEAN AVE	010	HAWAII PL	TAHITI PL	R	A	2	241	32	7,712	**41**	02/02/23	43	50-41	Poor (50-31)		
Dist 3	CENTRALAVE	CENTRAL AVE	180	SALINAS ST	MAIN ST	C	A	2	260	40	10,429	**41**	01/25/23	44	50-41	Poor (50-31)	05/06/19	SHALLOW PATCH
Dist 5	CHEROKEEDR	CHEROKEE DR	040	DURAN ST	W ALVIN DR	C	A	2	1,324	42	55,608	**41**	02/16/23	44	50-41	Poor (50-31)		
Dist 3	CHURCHST	CHURCH ST	40	CLAY ST	W ALISAL ST	C	C	2	1,117	38	42,446	**41**	01/26/23	43	50-41	Poor (50-31)		
Dist 1&2	DELMONTEAV	DEL MONTE AVE	030	MAE AVE	BURKE ST	C	O	2	885	42	37,170	**41**	02/02/23	43	50-41	Poor (50-31)	01/01/02	2" OVERLAY
Dist 4	LOMADR	LOMA DR	15	E LAUREL DR	DORORO DR	R	A	2	1,054	32	33,736	**41**	02/09/23	43	50-41	Poor (50-31)		
Dist 5	MASSAST	MASSA ST	15	N MAIN ST	END	R	A	2	479	32	15,348	**41**	03/03/23	42	50-41	Poor (50-31)		
Dist 3	SSANBORNRD	S SANBORN RD	010NB	ABBOTT ST	RAILROAD Ovepass (PCC START)	A	A	2	972	30	29,160	**41**	01/18/23	43	50-41	Poor (50-31)	01/01/82	1-1/2" OVERLAY
Dist 3	SANJUANDR	SAN JUAN DR	10	E BLANCO RD	SAN MIGUEL AVE	R	A	2	1,257	37	46,509	**41**	01/19/23	43	50-41	Poor (50-31)	02/26/19	DEEP PATCH
Dist 4	SONORAWAY	SONORA WAY	10	CHAPARRAL ST	TAMPICO AVE	R	A	2	1,078	32	34,509	**41**	02/09/23	43	50-41	Poor (50-31)	03/20/19	DEEP PATCH
Dist 5	SOTOPL	SOTO PL	15	E BOLIVAR ST	S END	R	A	2	145	32	4,640	**41**	03/02/23	43	50-41	Poor (50-31)		
Dist 3	SPICERST	SPICER ST	10	BRUNKEN AVE	ABBOTT ST	R	A	2	667	42	28,014	**41**	01/18/23	43	50-41	Poor (50-31)	01/01/02	CAPE SEAL
Dist 1	TAHITIPL	TAHITI PL	10	CARIBBEAN AVE	END	R	A	2	407	25	10,175	**41**	02/02/23	43	50-41	Poor (50-31)	01/01/07	SLURRY SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	ABERFORDCI	ABERFORD CIR	10	DE CUNHA CT	END	R	A	2	260	31	8,060	**40**	02/02/23	42	40-31	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 6	ARCADIACIR	ARCADIA CIR	10	ARCADIA WAY	END	R	A	2	383	32	12,286	**40**	02/04/23	42	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	CASCADECT	CASCADE CT	15	KLAMATH DR	CASCADE CIR	R	A	2	958	37	35,446	**40**	02/08/23	42	40-31	Poor (50-31)	03/26/19	DEEP PATCH
Dist 2	DELMONTEAV	DEL MONTE AVE	040	BURKE ST	WILLIAMS RD	C	A	2	1,130	44	49,720	**40**	02/02/23	43	40-31	Poor (50-31)	02/28/19	DEEP PATCH
Dist 3	EACACIAST	E ACACIA ST	010	S. MAIN ST	PAJARO ST	R	C	2	710	34	24,140	**40**	01/20/23	42	40-31	Poor (50-31)		
Dist 1	EBORONDARD	E BORONDA RD	090	CONSTITUTION BLVD	RIDER AVE	A	A	2	1,763	45	79,335	**40**	01/24/23	42	40-31	Poor (50-31)	01/01/02	REJUVENATION OIL
Dist 3	EMARKETST	E MARKET ST	010	MAIN ST	PAJARO ST	A	A	4	755	74	55,870	**40**	02/10/23	42	40-31	Poor (50-31)	03/26/19	DEEP PATCH
Dist 3	ESANLUISST	E SAN LUIS ST	050	MAIN ST	FRONT ST	R	P	2	1,699	34	57,766	**40**	03/16/23	41	40-31	Poor (50-31)		
Dist 5	LABREAST	LA BREA ST	10	SEPULVEDA DR	N 1ST ST	R	A	2	443	32	14,203	**40**	02/17/23	42	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	LACANADAWA	LA CANADA WAY	10	LOS OLIVOS DR	LA JOLLA WAY	R	A	2	682	32	21,824	**40**	01/23/23	42	40-31	Poor (50-31)	05/13/19	SLURRY SEAL
Dist 1	MAEAVE	MAE AVE	020	C.O.P.	DEL MONTE AVE	R	A	2	970	32	31,040	**40**	02/03/23	42	40-31	Poor (50-31)		
Dist 5	MONTGOMERY	MONTGOMERY ST	10	BUSH ST	HYDE ST	R	A	2	745	32	23,840	**40**	02/09/23	42	40-31	Poor (50-31)	01/01/14	SLURRY SEAL
Dist 3	PADREDR	PADRE DR	020	W ROMIE LN	W SAN JOAQUIN ST	R	A	2	1,226	32	39,232	**40**	01/23/23	42	40-31	Poor (50-31)	07/16/19	DEEP PATCH
Dist 5	POSTDR	POST DR	10	N DAVIS RD	CALLE DEL ADOBE	A	O	4	1,000	66	66,000	**40**	02/10/23	42	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 5	WLAMARST	W LAMAR ST	10	CASTRO ST	N MAIN ST	R	A	2	200	32	6,400	**40**	03/02/23	42	40-31	Poor (50-31)	01/01/08	CAPE SEAL
Dist 2	WILLIAMSRD	WILLIAMS RD	030	BELLEHAVEN ST	BARDIN WAY	A	A	4	1,481	64	94,784	**40**	01/18/23	42	40-31	Poor (50-31)	10/31/19	SHALLOW PATCH
Dist 3	WORKCIR	WORK CIR	10	WORK ST	END	R	A	2	402	32	12,877	**40**	01/18/23	42	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 2	BEVERLYDR	BEVERLY DR	15	FAIRVIEW AVE	FLORENCE PL	R	A	2	1,345	32	43,051	**39**	01/18/23	41	40-31	Poor (50-31)		
Dist 4	CABRILLOAV	CABRILLO AVE	10	TAMPICO AVE	LINWOOD DR	R	A	2	880	32	28,177	**39**	03/16/23	40	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	CAMDENWAY	CAMDEN WAY	010	BEDFORD DR	W ACACIA ST	R	A	2	215	32	6,880	**39**	01/25/23	41	40-31	Poor (50-31)		
Dist 3	CENTRALAVE	CENTRAL AVE	075	NACIONAL ST	HOMESTEAD AVE	C	C	2	1,279	49	62,671	**39**	01/25/23	41	40-31	Poor (50-31)	12/30/20	SKIN PATCH
Dist 3	COLLEGEDR	COLLEGE DR	010	CAMPUS AVE	W ALISAL ST	R	A	2	1,216	38	46,208	**39**	01/25/23	41	40-31	Poor (50-31)		
Dist 2	CROSSAVE	CROSS AVE	020	E MARKET ST	MIAMI ST	R	A	2	1,809	36	65,124	**39**	03/15/23	41	40-31	Poor (50-31)	08/16/19	DEEP PATCH
Dist 1	GARNERAVE	GARNER AVE	010	END	RIDER AVE	R	A	2	1,096	37	40,552	**39**	02/02/23	41	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	LOSPALOSDR	LOS PALOS DR	45	SAN JOSE ST	SAN MIGUEL AVE	C	A	2	862	37	31,894	**39**	01/19/23	42	40-31	Poor (50-31)	09/12/19	DEEP PATCH
Dist 2	MCGOWANDR	MCGOWAN DR	15	S SANBORN RD	JOHN ST	R	A	2	1,282	38	48,716	**39**	01/17/23	41	40-31	Poor (50-31)	02/15/19	DEEP PATCH
Dist 6	NEWPORTCT	NEWPORT CT	10	LEXINGTON DR N. SIDE	LEXINGTON DR S. SIDE	R	A	2	1,675	32	53,600	**39**	02/03/23	41	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	SSANBORNRD	S SANBORN RD	030NB	RAILROAD Overpass (PCC END)	PELLETT AVE	A	A	2	225	20	4,500	**39**	01/18/23	42	40-31	Poor (50-31)	01/01/83	SLURRY SEAL
Dist 3	SANBRUNOWA	SAN BRUNO WAY	15	SAN MATEO DR	SAN ANGELO DR	R	A	2	748	37	27,676	**39**	03/16/23	40	40-31	Poor (50-31)		
Dist 3	SANTOMASWA	SAN TOMAS WAY	15	SAN MARCOS DR	SAN DIEGO DR	R	A	2	623	32	19,966	**39**	01/19/23	41	40-31	Poor (50-31)		
Dist 6	SISKIYOUDR	SISKIYOU DR	10	CALAVERAS DR	KLAMATH DR	R	A	2	1,394	32	44,608	**39**	02/08/23	41	40-31	Poor (50-31)		
Dist 4	STALBANSCI	ST ALBANS CIR	10	ST ALBANS WAY	END	R	A	2	130	39	5,070	**39**	03/03/23	41	40-31	Poor (50-31)	01/01/08	CAPE SEAL
Dist 2	STJOSEPHCI	ST JOSEPH CIR	10	1ST AVE	END	R	A	2	280	32	8,960	**39**	03/13/23	40	40-31	Poor (50-31)	03/12/19	SHALLOW PATCH
Dist 3&4	WROSSIST	W ROSSI ST	015	N MAIN ST	SANSOME ST	A	A	2	1,429	54	77,191	**39**	01/25/23	41	40-31	Poor (50-31)		
Dist 3&4	WROSSIST	W ROSSI ST	045	RICO ST	VICTOR ST	A	A	2	2,088	54	112,752	**39**	01/25/23	41	40-31	Poor (50-31)	11/12/19	DEEP PATCH
Dist 3	WSANJOAQUI	W SAN JOAQUIN ST	10	E SAN JOAQUIN ST	PADRE DR	R	A	2	765	32	24,507	**39**	01/23/23	41	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	WINHAMST	WINHAM ST	35	S MAIN ST	END	R	P	2	2,361	42	99,169	**39**	03/16/23	40	40-31	Poor (50-31)	03/07/19	DEEP PATCH
Dist 3	WOODSIDEDR	WOODSIDE DR	010	RIKER ST	IVERSON ST	R	A	2	1,209	32	38,688	**39**	01/23/23	41	40-31	Poor (50-31)		
Dist 3	WOODSIDEDR	WOODSIDE DR	020	IVERSON ST	SAN VINCENTE AVE	R	A	2	1,113	32	35,616	**39**	01/23/23	41	40-31	Poor (50-31)		
Dist 3	YOUNGDR	YOUNG DR	10	KIRKWOOD AVE (N)	KIRKWOOD AVE (S)	R	A	2	1,040	32	33,285	**39**	03/16/23	41	40-31	Poor (50-31)	02/13/19	DEEP PATCH
Dist 3	BEDFORDDR	BEDFORD DR	15	COLUMBIA AVE	CAMDEN AVE	R	A	2	1,475	32	47,200	**38**	01/25/23	40	40-31	Poor (50-31)	04/20/21	SKIN PATCH
Dist 3	CALIFORNI1	CALIFORNIA ST	045	E GABILAN ST	JOHN ST	R	C	2	2,332	46	107,272	**38**	01/20/23	40	40-31	Poor (50-31)		
Dist 2	CAROLDR	CAROL DR	15	FLORENCE PL	END	R	A	2	1,431	32	45,813	**38**	01/18/23	40	40-31	Poor (50-31)		
Dist 4	CHAPARRALS	CHAPARRAL ST	015	N MAIN ST	LINWOOD DR	C	A	2	3,143	42	132,006	**38**	02/17/23	41	40-31	Poor (50-31)	04/28/21	SLURRY SEAL
Dist 3	CLAYALY	CLAY ALY	10	W SAN LUIS ST	CLAY ST	R	P	2	444	14	6,216	**38**	03/16/23	39	40-31	Poor (50-31)		
Dist 3	EGABILANST	E GABILAN ST	55	PAJARO ST	CALIFORNIA ST	R	A	2	673	49	32,977	**38**	01/26/23	40	40-31	Poor (50-31)		
Dist 5	EISENHOWER	EISENHOWER CIR	10	EISENHOWER ST	END	R	A	2	193	32	6,176	**38**	03/02/23	40	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	FRONTST	FRONT ST	055	E ALISAL ST	JOHN ST	A	A	4	1,839	60	110,340	**38**	01/19/23	41	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 3	GROVEST	GROVE ST	020	START OF LOOP	END OF LOOP	R	A	2	675	32	21,600	**38**	01/24/23	40	40-31	Poor (50-31)		
Dist 5	KENNEDYCIR	KENNEDY CIR	10	KENNEDY ST	END	R	A	2	350	32	11,200	**38**	03/02/23	40	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	LAMESADR	LA MESA DR	050	W END	PAJARO ST	R	A	2	217	37	8,029	**38**	01/18/23	40	40-31	Poor (50-31)	02/14/19	DEEP PATCH
Dist 3	LINCOLNAVE	LINCOLN AVE	020	CLAY ST	AVENUE A	R	C	2	538	38	20,444	**38**	01/26/23	40	40-31	Poor (50-31)		
Dist 5	MADRIDCIR	MADRID CIR	10	MADRID ST	END	R	A	2	495	32	15,840	**38**	02/10/23	40	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 1	ORCHARDAVE	ORCHARD AVE	10	DEL MONTE AVE	SIEBER ST	R	A	2	1,146	25	28,650	**38**	02/02/23	40	40-31	Poor (50-31)	03/20/19	DEEP PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	SPEARLST	S PEARL ST	15	E ALISAL ST	END	R	A	2	329	32	10,528	**38**	03/13/23	39	40-31	Poor (50-31)	05/10/19	SHALLOW PATCH
Dist 3	SANJOSEST	SAN JOSE ST	020	WILGART WAY	SAN JUAN DR	R	A	2	963	37	35,631	**38**	02/10/23	40	40-31	Poor (50-31)	05/16/19	DEEP PATCH
Dist 3	SIERRADR	SIERRA DR	15	GROVE ST	MANOR DR	R	A	2	1,561	32	49,977	**38**	01/24/23	40	40-31	Poor (50-31)		
Dist 3	STONEST	STONE ST	10	W MARKET ST	CENTRAL AVE	R	C	2	788	32	25,216	**38**	03/15/23	39	40-31	Poor (50-31)		
Dist 6	TAHOEDR	TAHOE DR	15	LOS COCHES AVE	END	R	A	2	1,498	35	52,430	**38**	02/08/23	40	40-31	Poor (50-31)		
Dist 3	WESTST	WEST ST	075	W ALISAL ST	CLAY ST	R	A	2	1,114	32	35,667	**38**	01/25/23	40	40-31	Poor (50-31)		
Dist 2	WILLIAMSRD	WILLIAMS RD	010	E ALISAL ST	E MARKET ST	A	A	4	1,769	64	113,216	**38**	01/18/23	41	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 3	BELLARMINE	BELLARMINE DR	10	W ALISAL ST	PALMA DR	R	A	2	978	32	31,320	**37**	01/24/23	39	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	BRUCEAVE	BRUCE AVE	20	COLLEGE DR	W ACACIA ST	R	A	2	836	32	26,762	**37**	01/25/23	39	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 6	CALAVERASD	CALAVERAS DR	15	WEST END	EAST END	R	A	2	3,228	32	103,300	**37**	02/08/23	39	40-31	Poor (50-31)	07/29/19	DEEP PATCH
Dist 3	CENTRALAVE	CENTRAL AVE	065	UNIVERSITY AVE	NACIONAL ST	C	C	2	1,475	49	72,275	**37**	01/25/23	39	40-31	Poor (50-31)	12/30/20	SKIN PATCH
Dist 4	CIRCLEPL	CIRCLE PL	10	CIRCLE DR	END	R	A	2	678	38	25,764	**37**	03/03/23	39	40-31	Poor (50-31)	06/14/19	DEEP PATCH
Dist 1	DST	D ST	15	MAE AVE	GALINDO ST	R	A	2	851	32	27,261	**37**	02/03/23	39	40-31	Poor (50-31)		
Dist 6	DONNERWAY	DONNER WAY	15	HUMBOLDT DR	EMERALD DR	R	A	2	804	37	29,748	**37**	02/08/23	39	40-31	Poor (50-31)		
Dist 2	EALISALST	E ALISAL ST	060	WILLIAMS RD	TOWT ST	A	A	4	987	67	66,129	**37**	01/25/23	39	40-31	Poor (50-31)	09/30/19	DEEP PATCH
Dist 3	EBLANCORD	E BLANCO RD	WB10	ABBOTT ST	BLANCO CIR	A	A	2	970	36	34,920	**37**	01/18/23	39	40-31	Poor (50-31)	01/01/86	SLURRY SEAL
Dist 5	EISENHOWE1	EISENHOWER ST	15	VAN BUREN AVE	RUSSELL RD	R	A	2	2,875	37	106,406	**37**	03/02/23	39	40-31	Poor (50-31)		
Dist 6	ELSURAVE	EL SUR AVE	10	PESCADERO DR	CAMBRIAN DR	R	A	2	813	32	26,017	**37**	02/04/23	39	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	KLAMATHDR	KLAMATH DR	20	C.O.P.	CALAVERAS DR	R	A	2	1,815	37	67,155	**37**	02/08/23	39	40-31	Poor (50-31)		
Dist 3	LAMESADR	LA MESA DR	080	LA MESA WAY	SAN ANGELO DR	R	A	2	1,433	37	53,021	**37**	01/18/23	39	40-31	Poor (50-31)	03/07/19	DEEP PATCH
Dist 5	LENNYST	LENNY ST	15	HOOVER ST	LOUISE ST	R	A	2	1,354	32	43,348	**37**	03/02/23	39	40-31	Poor (50-31)		
Dist 3	LINCOLNAVE	LINCOLN AVE	030	AVENUE A	AVENUE B	R	A	2	439	40	17,560	**37**	03/16/23	38	40-31	Poor (50-31)		
Dist 4	LOMBARDST	LOMBARD ST	15	VINCENT PL	HYDE ST	R	A	2	400	38	15,200	**37**	02/09/23	39	40-31	Poor (50-31)		
Dist 3	MAPLEST	MAPLE ST	020	PAJARO ST	CALIFORNIA ST	C	C	2	691	42	29,022	**37**	01/20/23	40	40-31	Poor (50-31)		
Dist 3	PADREDR	PADRE DR	030	W SAN JOAQUIN ST	NISSEN RD	R	A	2	457	42	19,194	**37**	01/23/23	39	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 5	PRADOST	PRADO ST	10	W END	PEREZ ST	R	A	2	296	34	10,064	**37**	03/02/23	39	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 2	PRINCEPL	PRINCE PL	10	S HEBBRON AVE (N)	S HEBBRON AVE (S)	R	A	2	918	32	29,376	**37**	01/19/23	39	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 2	SSANBORNRD	S SANBORN RD	060NB	FAIRVIEW AVE	JOHN ST	A	O	2	792	38	30,096	**37**	01/18/23	39	40-31	Poor (50-31)	04/30/19	SEAL CRACKS
Dist 3	SPRINGST	SPRING ST	15	JOHN ST	SUMMER ST	R	C	2	500	30	15,000	**37**	01/18/23	39	40-31	Poor (50-31)		
Dist 3	VASSARAVE	VASSAR AVE	10	HASTINGS AVE	LEMOS AVE	R	A	2	680	32	21,783	**37**	01/25/23	39	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	VENTURAWAY	VENTURA WAY	10	NAPA WAY	SUTTER ST	R	A	2	602	32	19,266	**37**	02/09/23	39	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	WACACIAST	W ACACIA ST	010	S MAIN ST	RIKER ST	C	A	2	1,471	35	51,485	**37**	01/25/23	40	40-31	Poor (50-31)	07/16/19	DEEP PATCH
Dist 2	WILLIAMSRD	WILLIAMS RD	020	E MARKET ST	BELLEHAVEN ST	A	A	4	1,412	64	90,368	**37**	01/18/23	40	40-31	Poor (50-31)	11/12/19	DEEP PATCH
Dist 1	ALAMOWAY	ALAMO WAY	10	LAS CASITAS DR	LA HONDA CT (N)	R	A	2	510	32	16,320	**36**	02/02/23	38	40-31	Poor (50-31)		
Dist 6	ALTURASWAY	ALTURAS WAY	10	ALTURAS CIR	TAHOE DR	R	A	2	394	32	12,631	**36**	02/08/23	38	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	CASCADECIR	CASCADE CIR	15	KLAMATH DR	END	R	A	2	491	32	15,739	**36**	02/08/23	38	40-31	Poor (50-31)		
Dist 3	DRIFTWOODP	DRIFTWOOD PL	15	N END	S END	R	A	2	680	32	21,760	**36**	01/23/23	38	40-31	Poor (50-31)		
Dist 5	EBOLIVARST	E BOLIVAR ST	15	N MAIN ST	VAN BUREN AVE	C	A	2	2,014	32	64,469	**36**	03/02/23	39	40-31	Poor (50-31)	07/16/19	DEEP PATCH
Dist 2	EMARKETST	E MARKET ST	100	KENNETH AVE	E ALISAL ST	C	A	2	1,321	56	73,976	**36**	03/13/23	39	40-31	Poor (50-31)	03/26/19	DEEP PATCH
Dist 4	EMARKETST	E MARKET ST	035EB	END PCC (S/O MARKET WAY)	E MARKET ST	A	A	2	360	28	10,080	**36**	02/10/23	38	40-31	Poor (50-31)		
Dist 1	ELKINGTONA	ELKINGTON AVE	10	N SANBORN RD	DEL MONTE AVE	R	A	2	1,758	38	66,832	**36**	02/02/23	38	40-31	Poor (50-31)	01/01/08	SLURRY SEAL
Dist 3	GROVEST	GROVE ST	110	ALAMEDA AVE	MAPLEWOOD DR	R	A	2	1,075	32	34,400	**36**	01/24/23	38	40-31	Poor (50-31)		
Dist 3	HARRISPL	HARRIS PL	10	HARRIS RD	END	R	A	2	999	42	41,958	**36**	01/17/23	38	40-31	Poor (50-31)		
Dist 3	HOMESTEADA	HOMESTEAD AVE	020	WILSON ST	CENTRAL AVE	R	P	2	1,230	38	46,740	**36**	01/25/23	37	40-31	Poor (50-31)	01/17/19	DEEP PATCH
Dist 3	MAPLEST	MAPLE ST	010	S MAIN ST	PAJARO ST	C	C	2	774	42	32,508	**36**	01/20/23	39	40-31	Poor (50-31)		
Dist 4	NAVAJODR	NAVAJO DR	70	NORTH MAIN ST	NOICE ST	C	A	2	331	41	13,571	**36**	02/16/23	39	40-31	Poor (50-31)		
Dist 3	REDWOODPL	REDWOOD PL	10	WOODSIDE DR	END	R	A	2	222	32	7,120	**36**	01/23/23	38	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	RIKERST	RIKER ST	150	W BLANCO RD	KIPLING ST	R	A	2	1,506	38	57,228	**36**	01/23/23	38	40-31	Poor (50-31)	05/20/19	SLURRY SEAL
Dist 5	STOKESWAY	STOKES WAY	10	LARKIN ST	COLTON DR	R	A	2	291	37	10,767	**36**	03/01/23	38	40-31	Poor (50-31)	05/13/19	SLURRY SEAL
Dist 3	VILLAST	VILLA ST	10	CENTRAL AVE	WILSON ST	C	C	2	1,285	38	48,830	**36**	03/16/23	38	40-31	Poor (50-31)		
Dist 3	WACACIAST	W ACACIA ST	040	W ALISAL ST	DAVIS RD	C	A	2	2,483	38	94,354	**36**	01/25/23	39	40-31	Poor (50-31)	06/11/19	DEEP PATCH
Dist 5	WALVINDR	W ALVIN DR	15	N MAIN ST	CHEROKEE DR	C	A	2	1,997	67	133,799	**36**	02/17/23	39	40-31	Poor (50-31)		
Dist 3	WESTST	WEST ST	035	W MARKET ST	CENTRAL AVE	R	P	2	1,630	32	52,160	**36**	03/16/23	37	40-31	Poor (50-31)	07/29/19	DEEP PATCH
Dist 5	ARTHURCT	ARTHUR CT	10	CLEVELAND AVE	END	R	A	2	316	27	8,544	**35**	03/02/23	37	40-31	Poor (50-31)	01/01/07	CAPE SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	AUBURNST	AUBURN ST	010	CHURCH ST	CAYUGA ST	R	A	2	321	39	12,519	**35**	01/25/23	37	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	BAYWOODPL	BAYWOOD PL	10	WOODSIDE DR	END	R	A	2	393	32	12,599	**35**	01/23/23	37	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 5	CHEROKEEDR	CHEROKEE DR	020	MADRID ST	SEVILLE ST	C	A	2	599	42	25,158	**35**	02/16/23	38	40-31	Poor (50-31)		
Dist 6	CHICOWAY	CHICO WAY	10	SISKIYOU DR	CALAVERAS DR	R	A	2	695	32	22,265	**35**	02/08/23	37	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 6	EMERALDWAY	EMERALD WAY	15	EMERALD DR	PESCADERO DR	R	A	2	575	42	24,150	**35**	02/08/23	37	40-31	Poor (50-31)		
Dist 3	HARKINSRD	HARKINS RD	010	SCHILLING PL	ABBOTT ST	C	A	4	1,245	80	99,600	**35**	01/17/23	38	40-31	Poor (50-31)	02/13/19	DEEP PATCH
Dist 1	HOLLYST	HOLLY ST	10	RIDER AVE	END	R	A	2	470	32	15,040	**35**	02/02/23	37	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	MAINST	MAIN ST	30	JOHN ST	E SAN LUIS ST	C	A	4	341	60	20,507	**35**	03/16/23	38	40-31	Poor (50-31)	07/05/19	DEEP PATCH
Dist 3	MARIONAVE	MARION AVE	15	HOMESTEAD AVE	W ACACIA ST	R	A	2	1,792	32	57,371	**35**	01/25/23	37	40-31	Poor (50-31)	05/16/19	DEEP PATCH
Dist 4	MARTELLAST	MARTELLA ST	10	PRESTONE ST	W ROSSI ST	R	A	2	684	35	23,940	**35**	03/16/23	37	40-31	Poor (50-31)		
Dist 5	NORTHRIDGE	NORTHRIDGE DR	15	VAN BUREN AVE	SWANER AVE	R	A	2	2,778	37	102,812	**35**	03/02/23	37	40-31	Poor (50-31)		
Dist 3	SANSIMEOND	SAN SIMEON DR	15	CAMDEN WAY	AMBROSE DR	R	A	2	1,792	32	57,360	**35**	01/24/23	37	40-31	Poor (50-31)	03/18/19	SHALLOW PATCH
Dist 3	WORKST	WORK ST	50	S SANBORN RD	ELVEE DR	A	A	4	1,902	62	117,940	**35**	01/18/23	38	40-31	Poor (50-31)	03/06/19	DEEP PATCH
Dist 3	ABBOTTST	ABBOTT ST	NB020	2950' N/O HARRIS RD (W/C)	GROWERS ST	A	C	2	3,650	44	160,600	**34**	01/19/23	37	40-31	Poor (50-31)	01/01/02	1-1/2" OVERLAY
Dist 2	ALMAAVE	ALMA AVE	020	1ST AVE	WILLIAMS RD	R	A	2	598	36	21,528	**34**	03/13/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	ASPENPL	ASPEN PL	10	WOODSIDE DR	END	R	A	2	175	32	5,600	**34**	01/23/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	ATHERTONCI	ATHERTON CIR	10	ATHERTON WAY	END	R	A	2	349	32	11,186	**34**	02/04/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	BOCAWAY	BOCA WAY	10	EMERALD WAY	TAHOE DR	R	A	2	264	32	8,478	**34**	02/04/23	36	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 4	CALIFORNI1	CALIFORNIA ST	020	MARKET WAY	E LAKE ST	R	P	2	635	52	33,020	**34**	03/17/23	35	40-31	Poor (50-31)	04/26/19	DEEP PATCH
Dist 1	CARIBBEANA	CARIBBEAN AVE	020	TAHITI PL	PACIFIC AVE	R	A	2	239	32	7,659	**34**	02/02/23	36	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 4	CEDARST	CEDAR ST	10	PARKWAY RD	E MARKET ST	R	A	2	416	36	14,976	**34**	03/03/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	HASTINGSAV	HASTINGS AVE	25	COLUMBIA AVE	CAMPUS AVE	R	A	2	1,207	32	38,651	**34**	01/25/23	36	40-31	Poor (50-31)		
Dist 5	HAYESST	HAYES ST	10	PARKSIDE ST	END	R	A	2	207	37	7,659	**34**	02/16/23	36	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 3	HOMESTEADA	HOMESTEAD AVE	030	CENTRAL AVE	W ALISAL ST	R	C	2	1,147	38	43,586	**34**	01/25/23	36	40-31	Poor (50-31)		
Dist 4	KERNST	KERN ST	10	E ALISAL ST	N FREEWAY OFF RAMP	C	A	2	1,925	39	75,075	**34**	01/25/23	37	40-31	Poor (50-31)	03/07/19	DEEP PATCH
Dist 5	LOUISEST	LOUISE ST	15	CLEVELAND AVE	LENNY ST	R	A	2	1,151	32	36,856	**34**	03/02/23	36	40-31	Poor (50-31)		
Dist 5	LUBERST	LUBER ST	10	HOOVER ST	CLEVELAND AVE	R	A	2	771	32	24,678	**34**	03/02/23	36	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	MAPLEST	MAPLE ST	030	CALIFORNIA ST	ABBOTT ST	C	C	2	1,706	40	68,240	**34**	01/20/23	36	40-31	Poor (50-31)		
Dist 3	PALMADR	PALMA DR	010	UNIVERSITY AVE	W ALISAL ST	R	C	2	1,620	38	61,560	**34**	01/24/23	36	40-31	Poor (50-31)		
Dist 2	PALOMAAVE	PALOMA AVE	20	E MARKET ST	TAMPA ST	R	A	2	840	40	33,600	**34**	03/13/23	36	40-31	Poor (50-31)		
Dist 5	POLKST	POLK ST	10	TULANE ST	W LAUREL DR	R	A	2	946	30	28,380	**34**	02/17/23	36	40-31	Poor (50-31)	02/14/19	DEEP PATCH
Dist 6	REDONDOWAY	REDONDO WAY	10	COMPTON WAY	GLENDORA WAY	R	A	2	1,091	32	34,928	**34**	02/04/23	36	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 4	STCHARLESW	ST CHARLES WAY	25	ST CHARLES PL	ST EDWARDS AVE	R	A	2	518	32	16,581	**34**	03/03/23	36	40-31	Poor (50-31)		
Dist 4	TAPADERODR	TAPADERO DR	15	E LAUREL DR	CHAPARRAL ST	R	A	2	1,835	32	58,730	**34**	02/17/23	36	40-31	Poor (50-31)	09/16/19	DEEP PATCH
Dist 5	WBOLIVARST	W BOLIVAR ST	15	N MAIN ST	END	R	A	2	490	42	20,580	**34**	03/02/23	36	40-31	Poor (50-31)		
Dist 5	WCURTISST	W CURTIS ST	015	N MAIN ST	PUEBLO DR	R	A	2	2,881	32	92,216	**34**	02/17/23	36	40-31	Poor (50-31)	04/05/19	DEEP PATCH
Dist 3&4	WROSSIST	W ROSSI ST	035	SANSOME ST	RICO ST	A	A	2	1,029	54	55,566	**34**	01/25/23	37	40-31	Poor (50-31)		
Dist 3	ABBOTTST	ABBOTT ST	NB100	JOHN ST	FRONT ST	A	A	2	901	36	32,455	**33**	01/19/23	36	40-31	Poor (50-31)	01/01/02	CAPE SEAL
Dist 3	AIRPORTBLV	AIRPORT BLVD	040	TERVEN AVE	HANSEN ST	C	A	4	1,268	59	74,812	**33**	01/17/23	36	40-31	Poor (50-31)	05/24/19	DEEP PATCH
Dist 3	CAPISTRANO	CAPISTRANO DR	15	ORANGE DR	W ACACIA ST	R	A	2	1,559	32	49,910	**33**	01/23/23	35	40-31	Poor (50-31)	07/16/19	DEEP PATCH
Dist 4	COITWAY	COIT WAY	10	BRIGHTON ST	W ROSSI ST	R	A	2	156	37	5,772	**33**	03/02/23	35	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 5	COLUMBINED	COLUMBINE DR	10	HEATHER DR	LUPIN DR	R	A	2	755	32	24,176	**33**	03/01/23	35	40-31	Poor (50-31)	11/05/19	DEEP PATCH
Dist 3	DELMARDR	DEL MAR DR	15	END	NISSEN RD	R	A	2	1,339	32	42,851	**33**	01/23/23	35	40-31	Poor (50-31)	07/07/20	SKIN PATCH
Dist 1&2	DELMONTEAV	DEL MONTE AVE	020	N SANBORN RD	MAE AVE	C	O	2	1,325	42	55,650	**33**	02/02/23	35	40-31	Poor (50-31)	03/11/19	DEEP PATCH
Dist 2&4	EALISALST	E ALISAL ST	070	TOWT ST	N SANBORN RD	A	A	4	1,236	75	92,700	**33**	01/25/23	36	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 4	ECURTISST	E CURTIS ST	25	NOICE DR	REATA ST	R	A	2	710	38	26,980	**33**	02/17/23	35	40-31	Poor (50-31)		
Dist 5	GARDENIACI	GARDENIA CIR	10	GARDENIA DR	E END	R	A	2	246	31	7,626	**33**	03/01/23	35	40-31	Poor (50-31)	03/07/19	DEEP PATCH
Dist 1	GEEST	GEE ST	10	RIDER AVE	END	R	A	2	590	38	22,420	**33**	02/02/23	35	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 2	GLENWOODCT	GLENWOOD CT	10	ALMA AVE	KIMMEL ST	R	A	2	447	32	14,315	**33**	03/13/23	35	40-31	Poor (50-31)	01/01/08	CAPE SEAL
Dist 4	GRANADAAVE	GRANADA AVE	15	CHAPARRAL ST	E LAUREL DR	R	A	2	1,794	32	57,422	**33**	02/17/23	35	40-31	Poor (50-31)	07/15/19	DEEP PATCH
Dist 6	INYOCIR	INYO CIR	10	MENDOCINO DR	END	R	A	2	250	32	8,014	**33**	02/17/23	35	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 6	LOSGATOSWA	LOS GATOS WAY	10	SARATOGA DR (W)	SARATOGA DR (E)	R	A	2	1,474	32	47,168	**33**	02/04/23	35	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	MAPLEWOODD	MAPLEWOOD DR	15	ALAMEDA AVE	GROVE ST	R	A	2	616	32	19,730	**33**	01/19/23	35	40-31	Poor (50-31)		
Dist 2	MONTANAST	MONTANA ST	15	N SANBORN RD	BEECH ST	R	A	2	1,227	32	39,277	**33**	03/13/23	35	40-31	Poor (50-31)	02/07/19	DEEP PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	NOGALDR	NOGAL DR	030	MIMBRERA WAY	LAS CASITAS DR	C	A	2	1,302	38	49,476	**33**	02/01/23	36	40-31	Poor (50-31)	09/30/19	DEEP PATCH
Dist 3	PADREDR	PADRE DR	050	W BLANCO RD	END	R	A	2	293	38	11,134	**33**	01/23/23	35	40-31	Poor (50-31)	05/15/19	SLURRY SEAL
Dist 3	RIKERST	RIKER ST	130	W ACACIA ST	W ROMIE LN	A	A	2	1,000	38	38,000	**33**	01/23/23	36	40-31	Poor (50-31)	06/14/21	SKIN PATCH
Dist 2	SWOODST	S WOOD ST	15	JOHN ST	E ALISAL ST	R	A	2	1,228	41	50,348	**33**	01/26/23	35	40-31	Poor (50-31)	02/19/21	SKIN PATCH
Dist 5	SOUZAWAY	SOUZA WAY	10	HOOVER ST	LENNY ST	R	A	2	738	32	23,638	**33**	03/02/23	35	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	TALBOTST	TALBOT ST	15	HOMESTEAD AVE	SAN VINCENTE AVE	R	A	2	949	32	30,368	**33**	01/25/23	35	40-31	Poor (50-31)	03/20/19	DEEP PATCH
Dist 5	TYLERPL	TYLER PL	10	TYLER ST	END	R	A	2	137	32	4,407	**33**	10/21/20	41	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5	WLAURELDR	W LAUREL DR	150	N DAVIS RD	EL RANCHO WAY	A	A	4	283	70	19,845	**33**	01/19/23	36	40-31	Poor (50-31)		
Dist 2	2NDAVE	2ND AVE	020	BELLEHAVEN ST	COOPER AVE	R	A	2	1,470	36	52,920	**32**	03/13/23	34	40-31	Poor (50-31)		
Dist 5	BARKLEYDR	BARKLEY DR	10	EISENHOWER ST	LOHMAN ST	R	A	2	513	32	16,436	**32**	03/02/23	34	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 3	BRUCEAVE	BRUCE AVE	10	TALBOT ST	COLLEGE DR	R	A	2	779	32	24,946	**32**	01/25/23	34	40-31	Poor (50-31)	09/16/19	DEEP PATCH
Dist 3	CATALINAAV	CATALINA AVE	10	WILSON ST	NACIONAL ST	R	A	2	668	37	24,716	**32**	03/16/23	34	40-31	Poor (50-31)	04/03/19	DEEP PATCH
Dist 3	CAYUGAST	CAYUGA ST	115	SAN LUIS ST	CLAY ST	R	C	2	445	39	17,355	**32**	01/25/23	34	40-31	Poor (50-31)		
Dist 4	CIRCLEDR	CIRCLE DR	015	N SANBORN RD	OREGON ST	C	A	2	1,563	35	54,705	**32**	03/03/23	35	40-31	Poor (50-31)	01/16/19	DEEP PATCH
Dist 3	CLAYST	CLAY ST	20	LINCOLN AVE	IVERSON ST	C	C	2	1,962	36	70,632	**32**	01/26/23	35	40-31	Poor (50-31)		
Dist 3	CORNELLAVE	CORNELL AVE	10	HASTINGS AVE	LEMOS AVE	R	A	2	681	32	21,815	**32**	01/25/23	34	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 4	EASTST	EAST ST	20	N FILICE ST	N SANBORN RD	R	A	2	798	32	25,536	**32**	03/13/23	34	40-31	Poor (50-31)		
Dist 4	ELWOODST	ELWOOD ST	15	TAMPICO AVE	LOMA DR	R	A	2	2,182	32	69,852	**32**	02/09/23	34	40-31	Poor (50-31)		
Dist 2	FAIRVIEWAV	FAIRVIEW AVE	15	S SANBORN RD	CAROL DR	R	A	2	2,020	34	68,680	**32**	01/18/23	34	40-31	Poor (50-31)	03/06/19	DEEP PATCH
Dist 4	GRANADAAVE	GRANADA AVE	35	E LAUREL DR	ROSARITA DR	R	A	2	1,748	32	55,948	**32**	02/17/23	34	40-31	Poor (50-31)	01/02/19	DEEP PATCH
Dist 3	GREENWOODP	GREENWOOD PL	010	WOODSIDE DR	SOUTH END	R	A	2	376	32	12,032	**32**	01/23/23	34	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 6	INDEPENDEN	INDEPENDENCE BLVD	NB020	PROVINCETOWN DR	E BORONDA RD	C	A	2	2,952	28	82,656	**32**	02/03/23	35	40-31	Poor (50-31)	03/06/19	DEEP PATCH
Dist 1	KILBRETHAV	KILBRETH AVE	10	N SANBORN RD	DEL MONTE AVE	R	A	2	1,666	31	51,646	**32**	02/02/23	34	40-31	Poor (50-31)	01/01/07	CAPE SEAL
Dist 2	SHASTAWAY	SHASTA WAY	10	GARDEN WAY	JOHN ST	R	A	2	792	32	25,351	**32**	01/19/23	34	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 3	SOLEDADST	SOLEDAD ST	010	JOHN ST	W GABILAN ST	R	A	2	2,140	32	68,480	**32**	03/17/23	34	40-31	Poor (50-31)		
Dist 4	SORRENTINI	SORRENTINI DR	15	GRANADA AVE	NATIVIDAD RD	R	A	2	541	32	17,330	**32**	02/17/23	34	40-31	Poor (50-31)		
Dist 3	STEPHANIED	STEPHANIE DR	10	S MAIN ST	STEPHANIE DR	R	A	2	860	41	35,260	**32**	01/23/23	34	40-31	Poor (50-31)	02/28/19	DEEP PATCH
Dist 3	TEAKWOODPL	TEAKWOOD PL	10	WOODSIDE DR	END	R	A	2	408	32	13,072	**32**	01/23/23	34	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5	VALDEZCIR	VALDEZ CIR	10	QUINTERO CIR	END	R	A	2	387	32	12,384	**32**	02/10/23	34	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 5	VICTORST	VICTOR ST	110	LARKIN ST	VAN NESS CT (E)	R	A	2	365	42	15,362	**32**	03/02/23	34	40-31	Poor (50-31)	05/15/19	SLURRY SEAL
Dist 5	ADAMSST	ADAMS ST	15	W LAUREL DR	NAVAJO DR	C	A	2	1,609	32	51,515	**31**	02/16/23	34	40-31	Poor (50-31)	03/11/19	DEEP PATCH
Dist 2	ALMAAVE	ALMA AVE	010	N. SANBORN ROAD	1ST AVE	R	A	2	2,714	36	97,704	**31**	03/13/23	33	40-31	Poor (50-31)	09/16/19	DEEP PATCH
Dist 4	ANGELUSDR	ANGELUS DR	10	E LAUREL DR	ELWOOD ST	R	A	2	802	32	25,690	**31**	02/17/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 5	CADIZCIR	CADIZ CIR	10	CHEROKEE DR	END	R	A	2	390	32	12,480	**31**	02/10/23	33	40-31	Poor (50-31)	01/01/01	SLURRY SEAL
Dist 3	CARMELITAD	CARMELITA DR	020	W ALISAL ST	PALMA DR	R	A	2	1,050	37	38,850	**31**	01/24/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	CAYUGAST	CAYUGA ST	010	CENTRAL AVE	W GABILAN ST	R	C	2	473	38	17,974	**31**	01/26/23	33	40-31	Poor (50-31)		
Dist 3	COLUMBIAAV	COLUMBIA AVE	20	LEMOS AVE	W ACACIA ST	R	A	2	865	32	27,680	**31**	01/25/23	33	40-31	Poor (50-31)		
Dist 4	DIABLODR	DIABLO DR	10	E LAUREL DR	ELWOOD ST	R	A	2	790	30	23,723	**31**	02/17/23	33	40-31	Poor (50-31)	01/01/07	SLURRY SEAL
Dist 3	EGABILANST	E GABILAN ST	15	MAIN ST	PAJARO ST	R	A	2	676	32	21,639	**31**	01/26/23	33	40-31	Poor (50-31)	03/26/19	DEEP PATCH
Dist 6	EMERALDDR	EMERALD DR	25	EMERALD WAY	DONNER WAY	R	A	2	808	37	29,896	**31**	02/04/23	33	40-31	Poor (50-31)	05/28/21	DEEP PATCH
Dist 2	FERNST	FERN ST	10	E ALISAL ST	SYCAMORE RD	R	A	2	315	34	10,722	**31**	03/13/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 2	FLORENCEPL	FLORENCE PL	15	FAIRVIEW AVE	BEVERLY DR	R	A	2	906	32	29,002	**31**	01/18/23	33	40-31	Poor (50-31)		
Dist 3	HANSENST	HANSEN ST	15	AIRPORT BLVD	HARKINS RD	C	A	2	1,051	62	65,162	**31**	01/17/23	35	40-31	Poor (50-31)	07/23/19	DEEP PATCH
Dist 5	HARDINGST	HARDING ST	15	POLK ST	TYLER ST	R	A	2	1,578	32	50,526	**31**	02/17/23	33	40-31	Poor (50-31)		
Dist 6	IMPERIALWA	IMPERIAL WAY	10	NAPA WAY	SUTTER ST	R	A	2	617	32	19,766	**31**	02/09/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 6	INDEPENDEN	INDEPENDENCE BLVD	NB010	CONSTITUTION BLVD	PROVINCETOWN DR	C	A	2	2,796	19	53,124	**31**	02/03/23	34	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	JOHNST	JOHN ST	100	SALINAS ST	S. MAIN ST	A	A	2	200	50	10,000	**31**	01/18/23	34	40-31	Poor (50-31)	01/01/02	CAPE SEAL
Dist 3	KATHERINEA	KATHERINE AVE	15	S MAIN ST	ALAMEDA AVE	R	A	2	2,803	32	89,721	**31**	01/19/23	33	40-31	Poor (50-31)	12/30/20	SKIN PATCH
Dist 3	LEMOSAVE	LEMOS AVE	010	DAVIS RD	COLLEGE DR	R	A	2	2,532	37	93,684	**31**	01/25/23	33	40-31	Poor (50-31)	02/04/19	DEEP PATCH
Dist 2	MOHARST	MOHAR ST	15	N SANBORN RD	BEECH ST	R	A	2	1,228	32	39,303	**31**	03/13/23	33	40-31	Poor (50-31)		
Dist 5	MOHAWKAVE	MOHAWK AVE	15	ADAMS ST	NAVAJO DR	R	A	2	785	38	29,830	**31**	02/16/23	33	40-31	Poor (50-31)		
Dist 5	N3RDST	N 3RD ST	10	BOEING AVE	W CURTIS ST	R	A	2	653	36	23,508	**31**	02/16/23	33	40-31	Poor (50-31)	03/25/19	SHALLOW PATCH
Dist 4	NSANBORNRD	N SANBORN RD	60	E LAUREL DR	OREGON ST	A	A	2	453	65	29,487	**31**	01/18/23	34	40-31	Poor (50-31)	03/18/19	SHALLOW PATCH
Dist 3	NACIONALST	NACIONAL ST	10	CLARK ST	PARK ST	R	A	2	1,800	38	68,400	**31**	03/16/23	33	40-31	Poor (50-31)	11/05/19	DEEP PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	NACIONALST	NACIONAL ST	30	CENTRAL AVE	S END	R	A	2	236	37	8,732	**31**	03/16/23	33	40-31	Poor (50-31)	05/21/19	DEEP PATCH
Dist 6	NAPAWAY	NAPA WAY	15	EL DORADO DR	IMPERIAL WAY	R	A	2	551	32	17,653	**31**	02/09/23	33	40-31	Poor (50-31)	03/06/19	DEEP PATCH
Dist 3	ORANGEDR	ORANGE DR	35	CAPISTRANO DR	S MAIN ST	R	A	2	1,829	32	58,550	**31**	01/23/23	33	40-31	Poor (50-31)	06/03/19	SHALLOW PATCH
Dist 4	PARSONSAVE	PARSONS AVE	15	BLOCK AVE	RAINIER DR	R	A	2	954	32	30,529	**31**	02/09/23	33	40-31	Poor (50-31)	02/27/19	DEEP PATCH
Dist 6	ROGGERD	ROGGE RD	010	NATIVIDAD RD	2725' W/O NATIVIDAD RD (COP)	R	A	2	2,725	32	87,200	**31**	03/03/23	33	40-31	Poor (50-31)		
Dist 3	SANLEANDR1	SAN LEANDRO WAY	10	W ALISAL ST	SANTA FE WAY	R	A	2	292	38	11,096	**31**	01/24/23	33	40-31	Poor (50-31)	01/01/01	CAPE SEAL
Dist 3	SANBORNPL	SANBORN PL	25	S END	INDUSTRIAL ST	C	A	2	2,355	34	80,070	**31**	01/17/23	35	40-31	Poor (50-31)	08/19/19	DEEP PATCH
Dist 5	SANTARITAS	SANTA RITA ST	15	E BOLIVAR ST	SWANER AVE	R	A	2	819	36	29,484	**31**	03/02/23	33	40-31	Poor (50-31)		
Dist 3	SUMMERST	SUMMER ST	25	FRONT ST	END	R	A	2	751	37	27,787	**31**	01/18/23	33	40-31	Poor (50-31)		
Dist 4&5	VICTORST	VICTOR ST	130	VAN NESS CT (W)	MCALLISTER ST	R	A	2	524	41	21,484	**31**	03/02/23	33	40-31	Poor (50-31)	05/15/19	SLURRY SEAL
Dist 6	YREKADR	YREKA DR	15	CALAVERAS DR	KLAMATH DR	R	A	2	1,398	32	44,736	**31**	02/08/23	33	40-31	Poor (50-31)		
Dist 3	ABBOTTST	ABBOTT ST	SB010	FRONT ST	JOHN ST	A	A	2	901	36	32,455	**30**	01/19/23	33	30-21	Failed (30-0)	05/16/19	DEEP PATCH
Dist 3	ABBOTTST	ABBOTT ST	SB090	GROWERS ST	900' S/O HARKINS RD (W/C)	A	C	2	3,225	44	141,900	**30**	01/19/23	33	30-21	Failed (30-0)		
Dist 3	CHESTNUTST	CHESTNUT ST	10	S MAIN ST	PAJARO ST	R	C	2	773	43	33,239	**30**	01/20/23	32	30-21	Failed (30-0)		
Dist 6	CUPERTINOW	CUPERTINO WAY	15	MILLBRAE ST	CAMBRIAN DR	R	A	2	2,262	32	72,397	**30**	02/04/23	32	30-21	Failed (30-0)	01/14/19	DEEP PATCH
Dist 5	DOUGLASAVE	DOUGLAS AVE	10	CRESCENT WAY	N 1ST ST	R	A	2	839	36	30,204	**30**	02/16/23	32	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	EBORONDARD	E BORONDA RD	060	NATIVIDAD DR	INDEPENDENCE BVD	A	A	2	2,082	45	93,690	**30**	01/24/23	33	30-21	Failed (30-0)		
Dist 4	ECURTISST	E CURTIS ST	10	N MAIN ST	NOICE DR	R	A	2	341	58	19,786	**30**	02/17/23	32	30-21	Failed (30-0)	01/01/85	SLURRY SEAL
Dist 3	EMARKETST	E MARKET ST	130WB	END PCC (E/O GREENFIELD ALLEY	PAJARO ST	A	A	2	480	30	14,400	**30**	02/10/23	33	30-21	Failed (30-0)		
Dist 1	ELMDR	ELM DR	10	RIDER AVE	END	R	A	2	375	23	8,625	**30**	02/02/23	32	30-21	Failed (30-0)	01/01/07	CAPE SEAL
Dist 1	GALINDOST	GALINDO ST	15	DEL MONTE AVE	END	R	A	2	1,151	32	36,838	**30**	02/03/23	32	30-21	Failed (30-0)		
Dist 3	HOMESTEADA	HOMESTEAD AVE	040	W ALISAL ST	IVERSON ST	R	C	2	1,255	37	46,435	**30**	01/25/23	32	30-21	Failed (30-0)		
Dist 3	LOMAVISTAD	LOMA VISTA DR	10	W ALISAL ST	SIERRA MADRE DR	R	A	2	735	32	23,530	**30**	01/25/23	32	30-21	Failed (30-0)	04/16/19	DEEP PATCH
Dist 3	LORIMERST	LORIMER ST	20	W ALISAL ST	HOMESTEAD AVE	R	C	2	1,021	32	32,672	**30**	01/25/23	32	30-21	Failed (30-0)		
Dist 5	LOUISECT	LOUISE CT	10	LOUISE ST	END	R	A	2	160	32	5,120	**30**	03/02/23	32	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 2	MERCERWAY	MERCER WAY	10	AIRPORT BLVD	MORTENSEN AVE	R	A	2	692	35	24,220	**30**	01/17/23	32	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	MONROEST	MONROE ST	15	TULANE ST	POLK ST	R	A	2	1,786	34	60,724	**30**	02/17/23	32	30-21	Failed (30-0)	05/21/19	DEEP PATCH
Dist 5	OSAGEDR	OSAGE DR	15	ADAMS ST	N 1ST ST	R	A	2	2,222	32	71,112	**30**	02/16/23	32	30-21	Failed (30-0)	07/29/19	DEEP PATCH
Dist 5	PARKSIDEST	PARKSIDE ST	20	W LAUREL DR	S END	R	A	2	925	38	35,150	**30**	02/16/23	32	30-21	Failed (30-0)		
Dist 3	SANFELIPEC	SAN FELIPE CT	10	SAN FELIPE ST	END	R	A	2	365	32	11,711	**30**	01/23/23	32	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANTACRUZA	SANTA CRUZ AVE	15	SAN ANGELO DR	SAN MARCOS DR	R	A	2	875	37	32,375	**30**	01/18/23	32	30-21	Failed (30-0)	02/07/19	DEEP PATCH
Dist 5	SEVILLEST	SEVILLE ST	15	DURAN ST	CHEROKEE DR	R	A	2	1,255	32	40,160	**30**	02/10/23	32	30-21	Failed (30-0)		
Dist 6	TRUCKEEWAY	TRUCKEE WAY	10	DONNER WAY	HUMBOLDT DR	R	A	2	1,180	32	37,774	**30**	02/08/23	32	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 6	UKIAHWAY	UKIAH WAY	10	SISKIYOU DR	CALAVERAS DR	R	A	2	666	32	21,315	**30**	02/08/23	32	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	WGABILANST	W GABILAN ST	50	CHURCH ST	CAPITOL ST	R	A	2	640	32	20,480	**30**	01/26/23	32	30-21	Failed (30-0)	02/07/19	DEEP PATCH
Dist 5	ADAMSST	ADAMS ST	45	MOHAWK AVE	NAVAJO DR	R	A	2	1,669	32	53,417	**29**	02/16/23	31	30-21	Failed (30-0)	05/16/19	DEEP PATCH
Dist 3	AMBROSEDR	AMBROSE DR	020	W ALISAL ST	SAN VINCENTE AVE	R	A	2	1,788	37	66,156	**29**	01/24/23	31	30-21	Failed (30-0)	07/05/19	DEEP PATCH
Dist 3	AVENUEB	AVENUE B	10	LINCOLN AVE	S MAIN ST	R	A	2	298	37	11,026	**29**	10/29/20	37	30-21	Failed (30-0)	01/01/86	CAPE SEAL
Dist 3	BELMONTDR	BELMONT DR	15	MELROSE DR	ARCHER ST	R	A	2	1,097	32	35,135	**29**	03/16/23	31	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 3	BLANCOCIR	BLANCO CIR	10	E BLANCO RD	END	R	A	2	980	50	49,000	**29**	01/18/23	31	30-21	Failed (30-0)	10/28/19	DEEP PATCH
Dist 5	CLEVELANDA	CLEVELAND AVE	15	VAN BUREN AVE	LENNY ST	R	A	2	1,212	38	46,056	**29**	03/02/23	31	30-21	Failed (30-0)		
Dist 3	COLUMBIAAV	COLUMBIA AVE	10	HASTINGS AVE	LEMOS AVE	R	A	2	682	32	21,824	**29**	01/25/23	31	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	EBORONDARD	E BORONDA RD	080	HEMINGWAY BLVD	CONSTITUTION BLVD	A	A	2	3,738	44	164,472	**29**	01/24/23	32	30-21	Failed (30-0)	01/01/02	SLURRY SEAL
Dist 4	EMARKETST	E MARKET ST	110WB	MARKET WAY/ SHERWOOD DR	START PCC (S/O MARKET WAY)	A	A	4	177	50	8,850	**29**	02/10/23	32	30-21	Failed (30-0)		
Dist 3	FRONTST	FRONT ST	040	E MARKET ST (AC START)	E ALISAL ST	A	A	3	763	65	49,595	**29**	02/10/23	31	30-21	Failed (30-0)		
Dist 3	GRIFFINST	GRIFFIN ST	10	JOHN ST	E ALISAL ST	R	A	2	1,170	37	43,290	**29**	01/26/23	31	30-21	Failed (30-0)	05/16/19	DEEP PATCH
Dist 5	HEATHERDR	HEATHER DR	15	IRIS DR	COLUMBINE DR	R	A	2	724	32	23,188	**29**	03/01/23	31	30-21	Failed (30-0)	03/11/19	DEEP PATCH
Dist 4&5	HYDEST	HYDE ST	15	VAN NESS CT	RICO ST	R	A	2	1,269	36	45,704	**29**	03/02/23	31	30-21	Failed (30-0)		
Dist 3	IVERSONST	IVERSON ST	35	CLAY ST	W ACACIA ST	C	A	2	1,279	58	74,182	**29**	01/23/23	33	30-21	Failed (30-0)		
Dist 2	JEANAVE	JEAN AVE	10	CAROL DR	SHARON DR	R	A	2	900	32	28,826	**29**	01/18/23	31	30-21	Failed (30-0)	03/06/19	DEEP PATCH
Dist 4	KENTUCKYST	KENTUCKY ST	15	LINDEN ST	TOWT ST	R	A	2	1,267	36	45,646	**29**	03/03/23	31	30-21	Failed (30-0)		
Dist 1	LASCASITAS	LAS CASITAS DR	20	RANCHERO DR	PINO WAY	C	A	2	447	37	16,539	**29**	02/10/23	32	30-21	Failed (30-0)	01/01/08	CAPE SEAL
Dist 5	LUPINDR	LUPIN DR	15	COLUMBINE DR	W BERNAL DR	R	A	2	1,899	32	60,770	**29**	03/01/23	31	30-21	Failed (30-0)	02/27/19	DEEP PATCH
Dist 4	NMADEIRAAV	N MADEIRA AVE	130	E MARKET ST	TERRACE ST	R	A	2	650	42	27,300	**29**	03/13/23	31	30-21	Failed (30-0)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 1	OLDSTAGERD	OLD STAGE RD	060	CITY LIMITS	WILLIAMS RD	C	A	2	9,382	26	243,932	**29**	03/03/23	32	30-21	Failed (30-0)	08/05/19	DEEP PATCH
Dist 3	PADREDR	PADRE DR	010	W ACACIA ST	W ROMIE LN	R	A	2	738	32	23,616	**29**	01/23/23	31	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 6	PLUMASWAY	PLUMAS WAY	10	GLACIER DR	MARIN AVE	R	A	2	889	32	28,475	**29**	02/09/23	31	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	RANCHERODR	RANCHERO DR	15	LAS CASITAS DR	LA HONDA CT	R	A	2	1,376	32	44,032	**29**	02/02/23	31	30-21	Failed (30-0)	03/06/19	DEEP PATCH
Dist 5	RODEOAVE	RODEO AVE	15	N 1ST ST	W CURTIS ST	R	A	2	1,286	34	43,724	**29**	02/16/23	31	30-21	Failed (30-0)		
Dist 2	SFILICEST	S FILICE ST	15	E ALISAL ST	JOHN ST	R	A	2	1,366	38	51,908	**29**	03/13/23	31	30-21	Failed (30-0)	10/06/21	SKIN PATCH
Dist 3	SANFELIPES	SAN FELIPE ST	20	SIERRA MADRE DR	SAN VINCENTE AVE	R	A	2	1,420	32	45,440	**29**	01/23/23	31	30-21	Failed (30-0)		
Dist 3	SANLEANDRO	SAN LEANDRO CIR	10	W ALISAL ST	END	R	A	2	221	32	7,079	**29**	01/24/23	31	30-21	Failed (30-0)	01/01/14	SLURRY SEAL
Dist 3	SANMARCOSC	SAN MARCOS CT	10	SAN MARCOS DR (N)	SAN MARCOS DR (S)	R	A	2	936	32	29,952	**29**	01/19/23	31	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANMARCOSD	SAN MARCOS DR	15	SANTA CRUZ AVE	LA MESA DR	R	A	2	1,956	37	72,372	**29**	01/18/23	31	30-21	Failed (30-0)		
Dist 2	SKYWAYBLVD	SKYWAY BLVD	010	E ALISAL ST	AIRPORT BLVD	C	A	4	2,339	62	145,018	**29**	01/17/23	33	30-21	Failed (30-0)	03/21/19	SHALLOW PATCH
Dist 4	STHELENWAY	ST HELEN WAY	10	CIRCLE DR	N MADEIRA AVE	R	A	2	1,619	32	51,808	**29**	03/03/23	31	30-21	Failed (30-0)	02/27/19	DEEP PATCH
Dist 5	TULANEST	TULANE ST	15	ROCHEX AVE	CHEROKEE DR	R	A	2	1,404	34	47,736	**29**	02/16/23	31	30-21	Failed (30-0)	02/06/19	DEEP PATCH
Dist 4	VALENCIAST	VALENCIA ST	10	OREGON ST	KENTUCKY ST	R	A	2	610	36	21,960	**29**	03/03/23	31	30-21	Failed (30-0)	01/01/07	CAPE SEAL
Dist 3	WROMIELN	W ROMIE LN	010	S MAIN ST	W ROMIE LN (MISSION PARK)	A	A	2	667	32	21,344	**29**	01/20/23	32	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 4	WASHINGTON	WASHINGTON DR	10	LINDEN ST	OREGON ST	R	A	2	793	25	19,837	**29**	03/03/23	31	30-21	Failed (30-0)	01/01/07	CAPE SEAL
Dist 3	WESTST	WEST ST	100	LANG ST	END	R	A	2	274	32	8,771	**29**	01/25/23	31	30-21	Failed (30-0)	11/05/19	DEEP PATCH
Dist 3	WILSONST	WILSON ST	45	VILLA ST	SAN CLEMENTE AVE	R	C	2	1,194	33	39,429	**29**	03/16/23	30	30-21	Failed (30-0)		
Dist 3	AUBURNST	AUBURN ST	020	CAYUGA ST	CAPITOL ST	R	A	2	310	30	9,300	**28**	01/25/23	30	30-21	Failed (30-0)		
Dist 3	AUBURNST	AUBURN ST	030	CAPITOL ST	WEST ST	R	P	2	615	40	24,600	**28**	01/25/23	29	30-21	Failed (30-0)		
Dist 4	BLOCKAVE	BLOCK AVE	15	KIP DR	PARSONS AVE	R	A	2	1,234	38	46,892	**28**	02/09/23	30	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 5	BUCHANANWA	BUCHANAN WAY	10	KENNEDY ST (N)	KENNEDY ST (S)	R	A	2	670	32	21,444	**28**	03/02/23	30	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 3	CASSIDYST	CASSIDY ST	10	CENTRAL AVE	ARCHER ST	R	C	2	320	32	10,240	**28**	03/16/23	29	30-21	Failed (30-0)		
Dist 4	CEDARST	CEDAR ST	25	N SANBORN RD	E MARKET ST	R	A	2	397	35	13,895	**28**	03/03/23	30	30-21	Failed (30-0)		
Dist 4	CONNELYCT	CONNELY CT	10	CONNELY ST (W)	CONNELY ST (E)	R	A	2	593	32	18,996	**28**	03/03/23	30	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	EMARKETST	E MARKET ST	020EB	PAJARO ST	START PCC (E/O GREENFIELD ALL	A	A	2	480	25	12,000	**28**	02/10/23	31	30-21	Failed (30-0)		
Dist 3	FAIRFAXDR	FAIRFAX DR	15	W ALISAL ST	COLUMBIA AVE	R	A	2	2,346	32	75,072	**28**	01/25/23	30	30-21	Failed (30-0)	07/05/19	DEEP PATCH
Dist 6	GLACIERDR	GLACIER DR	10	PLUMAS WAY	MODOC AVE	R	A	2	1,188	37	43,956	**28**	02/09/23	30	30-21	Failed (30-0)		
Dist 6	GLENDORAWA	GLENDORA WAY	10	COMPTON WAY	INGLEWOOD ST	R	A	2	1,822	38	69,236	**28**	02/04/23	30	30-21	Failed (30-0)		
Dist 3	HARTNELLST	HARTNELL ST	10	CENTRAL AVE	COLLEGE DR	R	A	2	801	37	29,637	**28**	01/25/23	30	30-21	Failed (30-0)	02/19/19	DEEP PATCH
Dist 6	INDEPENDEN	INDEPENDENCE BLVD	SB010	E BORONDA RD	PROVINCETOWN DR	C	A	2	2,952	32	94,464	**28**	02/03/23	31	30-21	Failed (30-0)		
Dist 5	LARKSPURDR	LARKSPUR DR	10	HEATHER DR	LUPIN DR	R	A	2	769	32	24,620	**28**	03/01/23	30	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	LASCASITAS	LAS CASITAS DR	30	PINO WAY	RIDER AVE	C	A	2	743	37	27,491	**28**	02/10/23	31	30-21	Failed (30-0)	03/06/19	DEEP PATCH
Dist 5	MADRIDST	MADRID ST	15	CHEROKEE DR	N MAIN ST	R	A	2	2,077	51	105,927	**28**	02/10/23	30	30-21	Failed (30-0)	11/07/19	DEEP PATCH
Dist 2	MCGOWANCIR	MCGOWAN CIR	10	MCGOWAN DR	END	R	A	2	272	39	10,608	**28**	01/17/23	30	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 5	N1STST	N 1ST ST	015	CHEROKEE DR	W ALVIN DR	R	A	2	1,364	41	55,924	**28**	02/17/23	30	30-21	Failed (30-0)	08/12/19	DEEP PATCH
Dist 5	N4THST	N 4TH ST	10	CRESCENT WAY	W CURTIS ST	R	A	2	675	34	22,950	**28**	02/16/23	30	30-21	Failed (30-0)		
Dist 5	PEREZST	PEREZ ST	10	S END	E BOLIVAR ST	R	A	2	165	32	5,280	**28**	03/02/23	30	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 3	SANANTONIO	SAN ANTONIO CIR	10	ORANGE DR	END	R	A	2	159	32	5,114	**28**	01/23/23	30	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 3	SOLEDADST	SOLEDAD ST	020	E GABILAN ST	N END	R	P	2	270	34	9,180	**28**	03/17/23	29	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 4	SUMMITDR	SUMMIT DR	15	HILL TOP DR (W)	HILL TOP DR (E)	R	A	2	1,187	32	37,984	**28**	03/03/23	30	30-21	Failed (30-0)	08/05/19	DEEP PATCH
Dist 6	TAHOECIR	TAHOE CIR	10	TAHOE DR	END	R	A	2	151	32	4,855	**28**	02/08/23	30	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	TERRADR	TERRA DR	10	E LAUREL DR	DORORO DR	R	A	2	751	32	24,034	**28**	02/09/23	30	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 2	TOWTST	TOWT ST	040	CORTEZ ST	GARNER AVE	C	A	2	787	36	28,332	**28**	02/03/23	32	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 3	VERTINAVE	VERTIN AVE	020	TERVEN AVE	END	R	A	2	510	42	21,420	**28**	01/17/23	30	30-21	Failed (30-0)	01/01/02	CAPE SEAL
Dist 6	YOSEMITECI	YOSEMITE CIR	10	YOSEMITE WAY	END	R	A	2	423	32	13,543	**28**	02/08/23	30	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	ABBOTTST	ABBOTT ST	SB080	S SANBORN RD	GROWERS ST	A	A	2	1,811	44	79,684	**27**	01/19/23	30	30-21	Failed (30-0)	05/21/19	DEEP PATCH
Dist 3	ANNEST	ANNE ST	10	ALEXANDER ST	N. END	R	A	2	410	32	13,120	**27**	03/15/23	29	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	AZTECCIR	AZTEC CIR	10	CHEROKEE DR	END	R	A	2	185	32	5,920	**27**	02/16/23	29	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	BALDWINST	BALDWIN ST	10	W LAUREL DR	END	R	A	2	466	38	17,708	**27**	02/16/23	29	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 5	BORONDARD	BORONDA RD	010WB	N MAIN ST	N FREEWAY ON RAMP	A	A	2	546	35	19,143	**27**	02/10/23	30	30-21	Failed (30-0)	04/15/19	SHALLOW PATCH
Dist 3	CAPITOLST	CAPITOL ST	030	CLAY ST	END	R	C	2	519	40	20,760	**27**	03/15/23	28	30-21	Failed (30-0)		
Dist 3	CAYUGAST	CAYUGA ST	120	CLAY ST	S END	R	A	2	290	37	10,730	**27**	01/25/23	29	30-21	Failed (30-0)		
Dist 3	CLAYST	CLAY ST	10	S MAIN ST	LINCOLN AVE	A	A	2	363	57	20,691	**27**	01/26/23	30	30-21	Failed (30-0)	02/27/19	DEEP PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 3	CRESPIWAY	CRESPI WAY	10	W ACACIA ST	PALMA DR	R	A	2	887	32	28,411	**27**	01/24/23	29	30-21	Failed (30-0)	03/26/19	DEEP PATCH
Dist 6	ELDORADODR	EL DORADO DR	15	HARDEN PKWY	E ALVIN DR	C	A	2	2,046	61	124,806	**27**	02/09/23	31	30-21	Failed (30-0)	04/28/21	SLURRY SEAL
Dist 2	HARRYETTED	HARRYETTE DR	10	FAIRVIEW AVE	CAROL DR	R	A	2	487	32	15,597	**27**	01/18/23	29	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	MILLBRAEST	MILLBRAE ST	15	NATIVIDAD RD	ATHERTON WAY	R	A	2	453	41	18,573	**27**	02/04/23	29	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 5	NAVAJODR	NAVAJO DR	25	W CURTIS ST	MOHAWK AVE	C	A	2	808	37	29,896	**27**	02/16/23	30	30-21	Failed (30-0)		
Dist 4	REATAST	REATA ST	15	TAPADERO DR	LINWOOD DR	R	A	2	2,281	32	73,022	**27**	02/17/23	29	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 4	SEQUOIAST	SEQUOIA ST	10	LINWOOD DR	MARYAL DR	R	A	2	1,093	32	34,999	**27**	02/17/23	29	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	SOLANOWAY	SOLANO WAY	20	MENDOCINO DR	END	R	A	2	285	32	9,120	**27**	02/17/23	29	30-21	Failed (30-0)		
Dist 2	TAMPAST	TAMPA ST	15	TORO AVE	E ALISAL ST	R	A	2	767	35	26,845	**27**	03/13/23	29	30-21	Failed (30-0)		
Dist 4	TRAZADOAVE	TRAZADO AVE	15	TAMPICO AVE	CHAPARRAL ST	R	A	2	1,354	32	43,342	**27**	02/17/23	29	30-21	Failed (30-0)	12/23/20	SKIN PATCH
Dist 5	TYLERST	TYLER ST	25	W LAUREL DR	IRIS DR	C	A	2	1,806	32	57,792	**27**	02/17/23	30	30-21	Failed (30-0)	08/05/19	DEEP PATCH
Dist 3	WGABILANST	W GABILAN ST	40	LINCOLN AVE	CHURCH ST	R	C	2	317	32	10,144	**27**	01/26/23	29	30-21	Failed (30-0)		
Dist 3	WILGARTWAY	WILGART WAY	25	MAPLEWOOD DR	E ROMIE LN	R	A	2	754	32	24,128	**27**	01/19/23	29	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 2	1STAVE	1ST AVE	25	E LAUREL DR	GARNER AVE	R	A	2	2,085	36	75,060	**26**	03/13/23	28	30-21	Failed (30-0)		
Dist 3	ARCHERST	ARCHER ST	010	BELMONT DR	UNIVERSITY AVE	R	A	2	689	32	22,048	**26**	03/16/23	28	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	BRUNKENAVE	BRUNKEN AVE	20	CHAMBERLAIN ST	MALARIN ST	R	A	2	1,012	42	42,504	**26**	01/18/23	28	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 3	CALIFORNI1	CALIFORNIA ST	105A	JOHN ST	MAPLE ST	C	A	2	950	46	43,700	**26**	01/20/23	30	30-21	Failed (30-0)		
Dist 6	CAMBRIANDR	CAMBRIAN DR	10	ATHERTON WAY	CUPERTINO WAY	R	A	2	1,320	37	48,840	**26**	02/04/23	28	30-21	Failed (30-0)		
Dist 5	CHEROKEEDR	CHEROKEE DR	070	TULANE ST	S END	R	A	2	525	38	19,950	**26**	02/16/23	28	30-21	Failed (30-0)	05/09/19	SLURRY SEAL
Dist 3	COLLEGEDR	COLLEGE DR	020	W ALISAL ST	END	R	A	2	1,481	38	56,278	**26**	01/25/23	28	30-21	Failed (30-0)		
Dist 5	COMANCHEWA	COMANCHE WAY	10	SHAWNEE WAY	CHEROKEE DR	R	A	2	786	32	25,161	**26**	02/16/23	28	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	COMMISSION	COMMISSION ST	15	GRIFFIN ST	END	R	A	2	1,489	32	47,659	**26**	01/26/23	28	30-21	Failed (30-0)	07/29/19	DEEP PATCH
Dist 5	CRESCENTWA	CRESCENT WAY	15	ADAMS ST	N 1ST ST	R	A	2	2,692	32	86,170	**26**	02/16/23	28	30-21	Failed (30-0)		
Dist 4	DOLORESST	DOLORES ST	10	OREGON ST	KENTUCKY ST	R	A	2	556	35	19,486	**26**	03/03/23	28	30-21	Failed (30-0)	02/08/19	DEEP PATCH
Dist 3	HAWTHORNES	HAWTHORNE ST	010	S MAIN ST	PAJARO ST	R	C	2	776	32	24,832	**26**	01/19/23	28	30-21	Failed (30-0)		
Dist 6	LOSALTOSWA	LOS ALTOS WAY	15	ATHERTON WAY (N)	ATHERTON WAY (S)	R	A	2	1,444	32	46,208	**26**	02/04/23	28	30-21	Failed (30-0)		
Dist 6	MARINAVE	MARIN AVE	15	RAINIER DR	LESLIE DR	R	A	2	2,035	32	65,133	**26**	02/09/23	28	30-21	Failed (30-0)	06/24/19	DEEP PATCH
Dist 4	PACHECOST	PACHECO ST	15	TAMPICO AVE	NATIVIDAD RD	R	A	2	1,140	32	36,502	**26**	02/17/23	28	30-21	Failed (30-0)		
Dist 5	PARKSIDEST	PARKSIDE ST	10	ROCHEX AVE	W LAUREL DR	R	A	2	500	32	16,000	**26**	02/16/23	28	30-21	Failed (30-0)		
Dist 6	PIKEWAY	PIKE WAY	20	LINWOOD DR	NICHOLS AVE	R	A	2	295	32	9,440	**26**	02/09/23	28	30-21	Failed (30-0)		
Dist 5	PRIMROSEDR	PRIMROSE DR	10	HEATHER DR	LUPIN DR	R	A	2	768	32	24,595	**26**	03/01/23	28	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	RIKERST	RIKER ST	120	CLAY ST	W ACACIA ST	A	A	2	1,431	38	54,378	**26**	01/23/23	29	30-21	Failed (30-0)	06/14/21	SKIN PATCH
Dist 4	SANTATERES	SANTA TERESA CIR	10	GRANADA AVE	END	R	A	2	180	32	5,760	**26**	02/17/23	28	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 5	SEPULVEDAD	SEPULVEDA DR	15	N 1ST ST	W ALVIN DR	R	A	2	1,518	32	48,595	**26**	02/17/23	28	30-21	Failed (30-0)		
Dist 6	YOSEMITEWA	YOSEMITE WAY	15	CASCADE CT	HUBOLDT DR	R	A	2	503	32	16,124	**26**	02/08/23	28	30-21	Failed (30-0)		
Dist 3	AMHERSTDR	AMHERST DR	10	W ALISAL ST	COLLEGE DR	R	A	2	630	32	20,177	**25**	03/16/23	27	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	BRUTUSST	BRUTUS ST	15	END (N)	END (S)	R	A	2	1,137	32	36,392	**25**	03/03/23	27	30-21	Failed (30-0)	03/08/19	DEEP PATCH
Dist 3	FAIRMONTDR	FAIRMONT DR	10	N END	LOS PALOS DR	R	C	2	220	32	7,040	**25**	01/19/23	27	30-21	Failed (30-0)	04/20/21	SKIN PATCH
Dist 3	FAIRMONTDR	FAIRMONT DR	20	LOS PALOS DR	S END	R	C	2	704	32	22,528	**25**	01/19/23	27	30-21	Failed (30-0)		
Dist 4	FILBERTWAY	FILBERT WAY	15	BRIGHTON ST	MCCALLISTER ST	R	A	2	255	32	8,160	**25**	03/02/23	27	30-21	Failed (30-0)	05/10/19	SLURRY SEAL
Dist 2	GRANDHAVEN	GRANDHAVEN ST	15	WILLIAMS RD	TOWT ST	R	A	2	1,688	32	54,046	**25**	03/13/23	27	30-21	Failed (30-0)	11/12/19	DEEP PATCH
Dist 5	HARDINGCIR	HARDING CIR	10	HARDING ST	END	R	A	2	215	26	5,590	**25**	02/17/23	27	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	HAWTHORNES	HAWTHORNE ST	030	CARMEL AVE	ALAMEDA AVE	R	C	2	561	32	17,952	**25**	01/19/23	27	30-21	Failed (30-0)		
Dist 6	INGLEWOODS	INGLEWOOD ST	10	PESCADERO DR	END	R	A	2	687	37	25,419	**25**	02/04/23	27	30-21	Failed (30-0)		
Dist 5	IRISALY	IRIS ALY	10	W BERNAL DR	IRIS DR	R	A	2	1,179	20	23,594	**25**	03/01/23	27	30-21	Failed (30-0)		
Dist 2	KIMMELST	KIMMEL ST	15	N SANBORN RD	BEECH ST	R	A	2	1,224	32	39,189	**25**	03/13/23	27	30-21	Failed (30-0)		
Dist 3	KIRKWOODAV	KIRKWOOD AVE	15	SAN CLEMENTE AVE	VILLA ST	R	A	2	1,139	32	36,456	**25**	03/16/23	27	30-21	Failed (30-0)	07/05/19	DEEP PATCH
Dist 6	LOSCOCHESA	LOS COCHES AVE	20	HUMBOLDT DR	CAMBRIAN DR	R	A	2	2,098	37	77,626	**25**	02/04/23	27	30-21	Failed (30-0)	02/06/19	DEEP PATCH
Dist 2	MACHADOWAY	MACHADO WAY	20	KIMMEL ST	ACOSTA ST	R	A	2	910	32	29,120	**25**	03/13/23	27	30-21	Failed (30-0)		
Dist 2	MIDWAYAVE	MIDWAY AVE	10	FAIRHAVEN ST	E LAUREL DR	R	A	2	574	36	20,664	**25**	03/13/23	27	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	N4THST	N 4TH ST	20	ROCHEX AVE	W CURTIS ST	R	A	2	406	22	8,932	**25**	02/16/23	27	30-21	Failed (30-0)		
Dist 4	NOICEDR	NOICE DR	20	CHAPARRAL ST	E LAUREL DR	R	A	2	1,876	32	60,039	**25**	02/16/23	27	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 1	PACIFICAVE	PACIFIC AVE	10	GARNER AVE	DEL MONTE AVE	R	A	2	1,544	23	35,512	**25**	02/02/23	27	30-21	Failed (30-0)	03/20/19	DEEP PATCH
Dist 6	PESCADEROD	PESCADERO DR	10	INGLEWOOD ST	ARCADIA WAY	R	A	2	608	32	19,456	**25**	02/04/23	27	30-21	Failed (30-0)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 5	RICOST	RICO ST	040	CASENTINI ST	LARKIN ST	C	A	2	836	41	34,276	**25**	03/01/23	28	30-21	Failed (30-0)	02/27/19	DEEP PATCH
Dist 3	SANFELIPES	SAN FELIPE ST	15	C.O.P.	SIERRA MADRE DR	R	A	2	430	32	13,760	**25**	01/23/23	27	30-21	Failed (30-0)	06/07/19	SHALLOW PATCH
Dist 2	SHARONDR	SHARON DR	15	END	BARBARA PL	R	A	2	1,271	32	40,685	**25**	01/18/23	27	30-21	Failed (30-0)	07/08/19	DEEP PATCH
Dist 4	SUNST	SUN ST	10	END	CALLE CEBU	R	A	2	590	39	23,010	**25**	01/26/23	27	30-21	Failed (30-0)	01/14/19	DEEP PATCH
Dist 1	WILLIAMSRD	WILLIAMS RD	070	E BORONDA RD	OLD STAGE RD	C	A	2	5,963	24	143,112	**25**	01/18/23	29	30-21	Failed (30-0)		
Dist 6	ALTURASCIR	ALTURAS CIR	15	LOS COCHES AVE	END	R	A	2	375	32	12,027	**24**	02/08/23	26	30-21	Failed (30-0)		
Dist 3	AVENUEA	AVENUE A	10	S MAIN ST	LINCOLN AVE	R	A	2	299	28	8,372	**24**	01/26/23	26	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 2	BARBARAPL	BARBARA PL	010	BEVERLY DR	FAIRVIEW AVE	R	A	2	752	35	26,320	**24**	01/18/23	26	30-21	Failed (30-0)		
Dist 5	BOEINGAVE	BOEING AVE	15	RODEO AVE	NAVAJO DR	R	A	2	1,600	36	57,603	**24**	02/16/23	26	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 3	CARMELAVE	CARMEL AVE	020	EL PASO PL	HAWTHORNE ST	R	C	2	694	37	25,678	**24**	01/24/23	26	30-21	Failed (30-0)		
Dist 2	FAIRHAVENS	FAIRHAVEN ST	15	WILLIAMS RD	TOWT ST	R	A	2	1,687	32	54,012	**24**	03/13/23	26	30-21	Failed (30-0)		
Dist 3	HAWTHORNES	HAWTHORNE ST	020	PAJARO ST	CARMEL AVE	R	C	2	1,482	32	47,424	**24**	01/19/23	26	30-21	Failed (30-0)		
Dist 3	HOMESTEADA	HOMESTEAD AVE	010	N END	WILSON ST	R	A	2	285	38	10,830	**24**	01/25/23	26	30-21	Failed (30-0)		
Dist 6	INDEPENDEN	INDEPENDENCE BLVD	SB020	PROVINCETOWN DR	CONSTITUTION BLVD	C	A	2	2,796	18	50,328	**24**	02/03/23	28	30-21	Failed (30-0)		
Dist 5	IRISDR	IRIS DR	15	N MAIN ST	LUPIN DR	C	A	2	440	54	23,760	**24**	03/01/23	27	30-21	Failed (30-0)	11/12/19	DEEP PATCH
Dist 3	IVERSONST	IVERSON ST	55	W ACACIA ST	C.O.P.	C	A	2	1,400	44	61,600	**24**	01/23/23	28	30-21	Failed (30-0)		
Dist 3	JOHNSONAVE	JOHNSON AVE	15	ABBOTT ST	E END	R	A	2	1,040	42	43,680	**24**	01/18/23	26	30-21	Failed (30-0)		
Dist 5	KIOWACIR	KIOWA CIR	10	CHEROKEE DR	END	R	A	2	184	32	5,888	**24**	02/16/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	LAMIRADACT	LA MIRADA CT	10	LA MIRADA DR (N)	LA MIRADA DR (N)	R	A	2	1,124	32	35,968	**24**	01/19/23	26	30-21	Failed (30-0)	01/23/19	SHALLOW PATCH
Dist 4	LUNSFORDDR	LUNSFORD DR	10	NATIVIDAD RD	END	R	A	2	706	32	22,612	**24**	02/17/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	MADONNADR	MADONNA DR	10	ROSARITA DR	SANTA TERESA WAY	R	A	2	722	32	23,109	**24**	02/17/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	MAEAVE	MAE AVE	030	DEL MONTE AVE	GARNER AVE	R	A	2	1,549	36	55,764	**24**	02/03/23	26	30-21	Failed (30-0)	08/19/19	DEEP PATCH
Dist 2	MARGARETST	MARGARET ST	15	E ALISAL ST	PALOMA AVE	R	A	2	1,305	35	45,701	**24**	03/13/23	26	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 2	MARIGOLDWA	MARIGOLD WAY	15	GARDEN WAY	MEADOW DR	R	A	2	1,114	32	35,678	**24**	01/19/23	26	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 5	N3RDST	N 3RD ST	20	W CURTIS ST	ROCHEX AVE	R	A	2	412	32	13,184	**24**	02/16/23	26	30-21	Failed (30-0)	03/25/19	SHALLOW PATCH
Dist 4	NWOODST	N WOOD ST	10	E. ALISAL ST	ROOSEVELT ST	R	A	2	577	32	18,471	**24**	01/26/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	NEWDEALST	NEW DEAL ST	15	DEL MONTE AVE	CORTEZ ST	R	A	2	769	26	19,994	**24**	02/03/23	26	30-21	Failed (30-0)		
Dist 3	PADREDR	PADRE DR	040	NISSEN RD	W BLANCO RD	R	A	2	762	37	28,194	**24**	01/23/23	26	30-21	Failed (30-0)	09/01/20	SKIN PATCH
Dist 2	PALOMAAVE	PALOMA AVE	30	TAMPA ST	MIAMI ST	R	A	2	1,142	34	38,828	**24**	03/13/23	26	30-21	Failed (30-0)		
Dist 4	PARKWAYRD	PARKWAY RD	15	N SANBORN RD	EUCALYPTUS DR	R	A	2	1,027	32	32,887	**24**	03/03/23	26	30-21	Failed (30-0)	09/30/19	DEEP PATCH
Dist 6	PESCADEROD	PESCADERO DR	20	ARCADIA WAY	LOS COCHES AVE	R	A	2	2,636	37	97,532	**24**	02/04/23	26	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 5	ROCHEXAVE	ROCHEX AVE	15	N MAIN ST	CRESCENT WAY	R	A	2	2,658	33	87,714	**24**	02/16/23	26	30-21	Failed (30-0)		
Dist 2	SHEBBRONAV	S HEBBRON AVE	15	E ALISAL ST	JOHN ST	C	A	2	1,290	36	46,440	**24**	03/13/23	27	30-21	Failed (30-0)	03/13/19	DEEP PATCH
Dist 5	SEVILLEWAY	SEVILLE WAY	10	CHEROKEE DR	SEVILLE ST	R	A	2	177	32	5,664	**24**	02/10/23	26	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	SHERWOODPL	SHERWOOD PL	10	SHERWOOD DR	END	R	A	2	766	38	29,145	**24**	01/20/23	26	30-21	Failed (30-0)	03/05/19	DEEP PATCH
Dist 4	SHIRESWAY	SHIRES WAY	10	BLOCK AVE	RAINIER DR	R	A	2	475	37	17,609	**24**	02/09/23	26	30-21	Failed (30-0)	09/16/19	DEEP PATCH
Dist 3	SIERRAMADR	SIERRA MADRE DR	15	SANTA MONICA WAY	SANTA PAULA DR	R	A	2	2,719	32	87,028	**24**	01/24/23	26	30-21	Failed (30-0)	04/11/19	DEEP PATCH
Dist 3	STANDREWCT	ST ANDREW CT	10	PALMA DR (W)	PALMA DR (E)	R	A	2	925	32	29,600	**24**	01/24/23	26	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 3	STEPHANIED	STEPHANIE DR	30	C.O.P.	BYRON DR	R	A	2	130	35	4,550	**24**	01/23/23	26	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	STEVENSONS	STEVENSON ST	10	MCALLISTER ST	BRIGHTON ST	R	A	2	542	31	16,802	**24**	03/02/23	26	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 6	TRINITYWAY	TRINITY WAY	15	E ALVIN DR	END	R	A	2	895	32	28,668	**24**	02/09/23	26	30-21	Failed (30-0)		
Dist 5	ALHAMBRAST	ALHAMBRA ST	10	SEPULVEDA DR	N 1ST ST	R	A	2	509	30	15,270	**23**	02/17/23	25	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 6	ALMADENDR	ALMADEN DR	10	CUPERTINO WAY	LOS COCHES AVE	R	A	2	259	32	8,308	**23**	02/04/23	25	30-21	Failed (30-0)	04/03/19	DEEP PATCH
Dist 5	ARAGONCIR	ARAGON CIR	10	CHEROKEE DR	END	R	A	2	475	32	15,200	**23**	02/10/23	25	30-21	Failed (30-0)	11/07/19	DEEP PATCH
Dist 3	ARCHERST	ARCHER ST	020	UNIVERSITY AVE	NACIONAL ST	R	A	2	1,291	32	41,312	**23**	03/16/23	25	30-21	Failed (30-0)	07/16/19	DEEP PATCH
Dist 2	BEECHST	BEECH ST	010	GARNER AVE	ACOSTA ST (SW END)	R	A	2	1,810	52	94,120	**23**	03/13/23	25	30-21	Failed (30-0)	07/06/20	SKIN PATCH
Dist 5	BORONDARD	BORONDA RD	010EB	N FREEWAY ON RAMP	N MAIN ST	A	A	2	546	66	36,098	**23**	02/10/23	26	30-21	Failed (30-0)	04/15/19	SHALLOW PATCH
Dist 1&2	BURKEST	BURKE ST	10	DEL MONTE AVE	END	R	A	2	708	25	17,700	**23**	02/03/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	CALIFORNI1	CALIFORNIA ST	145	E ACACIA ST	E ROMIE LN	C	A	2	611	48	29,328	**23**	01/20/23	27	30-21	Failed (30-0)	04/15/19	DEEP PATCH
Dist 3	CARMELITAD	CARMELITA DR	010	AMBROSE DR	W ALISAL ST	R	A	2	1,904	32	60,928	**23**	01/24/23	25	30-21	Failed (30-0)		
Dist 6	COMPTONWAY	COMPTON WAY	15	PESCADERO DR	GLENDORA WAY	R	A	2	535	38	20,356	**23**	03/17/23	25	30-21	Failed (30-0)		
Dist 2	COOPERAVE	COOPER AVE	10	2ND AVE	TOWT ST	R	A	2	472	35	16,520	**23**	03/13/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	DONNERCIR	DONNER CIR	10	DONNER WAY	END	R	A	2	449	32	14,374	**23**	02/08/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	EACACIAST	E ACACIA ST	030	CARMEL AVE	ALAMEDA AVE	R	C	2	476	37	17,612	**23**	01/20/23	25	30-21	Failed (30-0)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 5	EBROCIR	EBRO CIR	10	CHEROKEE DR	END	R	A	2	520	32	16,640	**23**	02/10/23	25	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	FAIRMONTCI	FAIRMONT CIR	10	FAIRMONT DR	END	R	A	2	139	32	4,448	**23**	01/19/23	25	30-21	Failed (30-0)	06/01/21	SKIN PATCH
Dist 2	GARNERAVE	GARNER AVE	050	1ST AVE	WILLIAMS RD	C	A	2	600	41	24,600	**23**	02/02/23	27	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	HUNTINGTON	HUNTINGTON ST	10	ROCHEX AVE	W LAUREL DR	R	A	2	410	30	12,300	**23**	02/16/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	JUNIPEROWA	JUNIPERO WAY	10	W ACACIA ST	PALMA DR	R	A	2	887	32	28,406	**23**	01/24/23	25	30-21	Failed (30-0)	03/26/19	DEEP PATCH
Dist 6	LESLIEDR	LESLIE DR	15	NATIVIDAD RD	CALAVERAS DR	R	A	2	1,363	32	43,622	**23**	02/09/23	25	30-21	Failed (30-0)	08/05/19	DEEP PATCH
Dist 6	MARIPOSACT	MARIPOSA CT	10	MARIPOSA ST	END	R	A	2	363	32	11,621	**23**	02/09/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	PAJAROST	PAJARO ST	050	E ROMIE LN	SAN MIGUEL AVE	A	C	2	1,142	50	57,100	**23**	01/20/23	27	30-21	Failed (30-0)		
Dist 3	PAJAROST	PAJARO ST	060	SAN MIGUEL AVE	SAN PEDRO ST	A	C	2	710	32	22,720	**23**	01/20/23	27	30-21	Failed (30-0)		
Dist 4	POPLARST	POPLAR ST	10	PARKWAY RD	E MARKET ST	R	A	2	408	36	14,713	**23**	03/03/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	PRESTONST	PRESTON ST	10	MARTELLA ST	END	R	A	2	338	28	9,464	**23**	03/16/23	25	30-21	Failed (30-0)	04/15/21	SKIN PATCH
Dist 2	QUILLAST	QUILLA ST	25	WILLIAMS ROAD	E ALISAL ST	R	A	2	345	37	12,765	**23**	03/13/23	25	30-21	Failed (30-0)		
Dist 3	RIKERST	RIKER ST	140	W ROMIE LN	W BLANCO RD	A	A	2	1,963	37	72,631	**23**	01/23/23	26	30-21	Failed (30-0)	07/11/19	SHALLOW PATCH
Dist 3	ROSEST	ROSE ST	10	WEST ST	END	R	C	2	230	32	7,383	**23**	03/15/23	25	30-21	Failed (30-0)		
Dist 3	SANVINCEN1	SAN VINCENTE CIR	10	SAN VINCENTE AVE	END	R	A	2	324	37	11,988	**23**	01/23/23	25	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANTABARBA	SANTA BARBARA AVE	15	WILSON ST	NATIONAL ST	R	A	2	668	32	21,376	**23**	03/16/23	25	30-21	Failed (30-0)		
Dist 2	SKYWAYBLVD	SKYWAY BLVD	020	AIRPORT BLVD	MORTENSEN AVE	R	A	2	623	36	22,428	**23**	01/17/23	25	30-21	Failed (30-0)	03/21/19	SHALLOW PATCH
Dist 4	STBRENDANW	ST BRENDAN WAY	10	ST FRANCIS WAY	ROSARITA DR	R	A	2	1,374	32	43,996	**23**	02/17/23	25	30-21	Failed (30-0)	04/03/19	DEEP PATCH
Dist 5	TAFTCIR	TAFT CIR	10	VAN BUREN AVE	END	R	A	2	240	27	6,480	**23**	03/02/23	25	30-21	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 5	WLAURELDR	W LAUREL DR	140	N DAVIS RD	S FREEWAY ON RAMP	A	A	4	459	100	45,918	**23**	01/19/23	26	30-21	Failed (30-0)		
Dist 6	YOLOCIR	YOLO CIR	10	MENDOCINO DR	END	R	A	2	247	38	9,386	**23**	02/17/23	25	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 2	2NDAVE	2ND AVE	010	GARNER AVE	BELLEHAVEN ST	R	A	2	910	36	32,760	**22**	03/13/23	24	30-21	Failed (30-0)		
Dist 3	ABBOTTST	ABBOTT ST	NB030	GROWERS ST	S SANBORN RD	A	O	2	1,811	44	79,684	**22**	01/19/23	25	30-21	Failed (30-0)	10/28/19	DEEP PATCH
Dist 2	AFTONRD	AFTON RD	010	SYCAMORE RD	BARDIN RD	R	A	2	1,376	34	46,784	**22**	03/13/23	24	30-21	Failed (30-0)	04/15/19	SHALLOW PATCH
Dist 5	ALVINCIR	ALVIN CIR	10	W ALVIN DR	END	R	A	2	333	32	10,665	**22**	02/10/23	24	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	ATHERTONWA	ATHERTON WAY	10	MILLBRAE ST	CAMBRIAN DR	R	A	2	1,257	37	46,509	**22**	02/04/23	24	30-21	Failed (30-0)	01/16/19	DEEP PATCH
Dist 3	AVELARST	AVELAR ST	10	PINE ST	END	R	C	2	280	32	8,960	**22**	01/20/23	24	30-21	Failed (30-0)	09/01/20	SKIN PATCH
Dist 2	CORTEZST	CORTEZ ST	15	NEW DEAL ST	END	R	A	2	1,045	32	33,440	**22**	02/03/23	24	30-21	Failed (30-0)		
Dist 3	FRONTST	FRONT ST	050WB	FORK 436 FT N/O E SALISAL ST	PCC START	A	A	1	594	18	10,692	**22**	02/10/23	25	30-21	Failed (30-0)		
Dist 2	KENNETHAVE	KENNETH AVE	010	FAIRHAVEN ST	E LAUREL DR	R	A	2	572	34	19,448	**22**	03/13/23	24	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	LINDENST	LINDEN ST	15	OREGON ST	EUCALYPTUS DR	R	A	2	996	42	41,839	**22**	03/03/23	24	30-21	Failed (30-0)		
Dist 6	MARIPOSAST	MARIPOSA ST	10	TRINITY WAY	MARIN AVE	R	A	2	873	32	27,945	**22**	02/09/23	24	30-21	Failed (30-0)		
Dist 6	MENDOCINOD	MENDOCINO DR	45	YOLO CIR	EL DORADO DR	R	A	2	887	38	33,706	**22**	02/17/23	24	30-21	Failed (30-0)	05/21/19	DEEP PATCH
Dist 4	MERCEDST	MERCED ST	15	E MARKET ST	END	R	A	2	883	32	28,286	**22**	01/18/23	24	30-21	Failed (30-0)	06/24/19	DEEP PATCH
Dist 4	PIKEWAY	PIKE WAY	10	PARSONS AVE	LINWOOD DR	R	A	2	266	32	8,512	**22**	02/09/23	24	30-21	Failed (30-0)		
Dist 5	POLKCIR	POLK CIR	10	POLK ST	END	R	A	2	210	25	5,250	**22**	02/17/23	24	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	RIANDACIR	RIANDA CIR	20	PRADER ST	END	R	A	2	510	42	21,420	**22**	01/18/23	24	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	RIKERTER	RIKER TER	10	W ALISAL ST	END	R	A	2	1,072	32	34,310	**22**	01/23/23	24	30-21	Failed (30-0)	02/04/19	DEEP PATCH
Dist 3	SANTAMONI1	SANTA MONICA WAY	15	SIERRA MADRE DR	SANTA FE WAY	R	A	2	816	37	30,192	**22**	01/24/23	24	30-21	Failed (30-0)	02/25/19	DEEP PATCH
Dist 5	SHAWNEEWAY	SHAWNEE WAY	15	SEMINOLE WAY	INCA WAY	R	A	2	516	32	16,540	**22**	02/16/23	24	30-21	Failed (30-0)	07/24/20	SKIN PATCH
Dist 2&4	TOWTST	TOWT ST	060	E LAUREL DR	E MARKET ST	C	A	2	1,497	42	62,874	**22**	02/08/23	26	30-21	Failed (30-0)	06/17/19	DEEP PATCH
Dist 2	TULIPCIR	TULIP CIR	10	JOHN ST	END	R	A	2	387	32	12,393	**22**	01/19/23	24	30-21	Failed (30-0)	10/19/20	SKIN PATCH
Dist 3	WILSONST	WILSON ST	15	HOMESTEAD AVE	VILLA ST	R	C	2	635	33	20,979	**22**	03/16/23	24	30-21	Failed (30-0)		
Dist 2	ACOSTAST	ACOSTA ST	120	TOWT ST	2ND AVE	R	A	2	484	32	15,488	**21**	03/13/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 6	ARCADIAWAY	ARCADIA WAY	30	NATIVIDAD RD	GLENDORA WAY	R	A	2	738	37	27,306	**21**	02/04/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	BARDINWAY	BARDIN WAY	010	BARDIN CIR (N)	WILLIAMS RD	R	A	2	895	32	28,640	**21**	03/15/23	23	30-21	Failed (30-0)	10/31/19	SHALLOW PATCH
Dist 6	CAMBRIANDR	CAMBRIAN DR	30	CUPERTINO WAY	SAUSAL DR	R	A	2	1,051	37	38,887	**21**	02/04/23	23	30-21	Failed (30-0)		
Dist 3	CAPITOLST	CAPITOL ST	110	LANG ST	GEIL ST	R	A	2	325	38	12,350	**21**	01/25/23	23	30-21	Failed (30-0)		
Dist 3	CAYUGAST	CAYUGA ST	110	W ALISAL ST	SAN LUIS ST	R	C	2	635	39	24,765	**21**	01/25/23	23	30-21	Failed (30-0)		
Dist 3	CEDROSAVE	CEDROS AVE	10	NACIONAL ST	END	R	A	2	385	32	12,320	**21**	03/16/23	23	30-21	Failed (30-0)	03/18/19	SHALLOW PATCH
Dist 3	CHALONCIR	CHALON CIR	10	W ACACIA ST	END	R	A	2	256	32	8,199	**21**	01/25/23	23	30-21	Failed (30-0)	10/19/20	SKIN PATCH
Dist 6	COLUSAPL	COLUSA PL	10	MENDOCINO DR (W)	MENDOCINO DR (E)	R	A	2	1,470	32	47,040	**21**	02/17/23	23	30-21	Failed (30-0)	03/07/19	DEEP PATCH
Dist 5	ELAMARST	E LAMAR ST	15	N MAIN ST	SANTA RITA ST	R	A	2	783	40	31,320	**21**	03/02/23	23	30-21	Failed (30-0)	03/07/19	DEEP PATCH
Dist 2&4	ELAURELDR	E LAUREL DR	025	N SANBORN RD	TOWT ST	A	A	2	1,658	42	69,636	**21**	01/19/23	24	30-21	Failed (30-0)	09/06/19	DEEP PATCH

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	GARNERALY	GARNER ALY	10	ALMA AVE	GARNER AVE	R	A	2	250	21	5,250	**21**	03/17/23	23	30-21	Failed (30-0)	03/19/19	SHALLOW PATCH
Dist 2	GREENST	GREEN ST	15	DEL MONTE AVE	GARNER AVE	R	A	2	1,546	32	49,484	**21**	02/03/23	23	30-21	Failed (30-0)	08/19/19	DEEP PATCH
Dist 2	HAVENALY	HAVEN ALY	020	FAIRHAVEN ST	GRANDHAVEN ST	R	A	2	298	16	4,768	**21**	03/13/23	23	30-21	Failed (30-0)	04/20/21	SKIN PATCH
Dist 4	HILLTOPDR	HILL TOP DR	15	N MADEIRA AVE	SUMMIT DR	R	A	2	1,476	32	47,244	**21**	03/03/23	23	30-21	Failed (30-0)		
Dist 3	HOWARDST	HOWARD ST	20	LINCOLN AVE	CHURCH ST	R	C	2	270	23	6,210	**21**	01/26/23	23	30-21	Failed (30-0)		
Dist 2	KEYST	KEY ST	10	TORO AVE	PALOMA AVE	R	A	2	343	32	10,988	**21**	03/13/23	23	30-21	Failed (30-0)	09/30/19	DEEP PATCH
Dist 6	MENLOWAY	MENLO WAY	10	ATHERTON WAY	LOS ALTOS WAY	R	A	2	644	32	20,625	**21**	02/04/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	MURPHYST	MURPHY ST	10	E ALISAL ST	END	R	A	2	586	32	18,752	**21**	01/18/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	N2NDST	N 2ND ST	10	BOEING AVE	W CURTIS ST	R	A	2	635	36	22,860	**21**	02/16/23	23	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	NMADEIRAAV	N MADEIRA AVE	025	HILL CIR	N SANBORN RD	R	A	2	581	32	18,619	**21**	03/03/23	23	30-21	Failed (30-0)	05/21/19	DEEP PATCH
Dist 5	NAVAJODR	NAVAJO DR	15	ADAMS ST	W CURTIS ST	C	A	2	905	38	34,390	**21**	02/16/23	25	30-21	Failed (30-0)	04/05/19	DEEP PATCH
Dist 4	NEILST	NEIL ST	10	MERCED ST	GRIFFIN ST	R	A	2	277	38	10,551	**21**	01/18/23	23	30-21	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SACACIACIR	S ACACIA CIR	10	W ACACIA ST	END	R	A	2	147	32	4,732	**21**	03/16/23	23	30-21	Failed (30-0)	09/01/20	SKIN PATCH
Dist 6	SARATOGADR	SARATOGA DR	15	NATIVIDAD RD	END	R	A	2	1,455	41	59,655	**21**	02/04/23	23	30-21	Failed (30-0)	01/16/19	DEEP PATCH
Dist 5	SUCRECT	SUCRE CT	15	E LAMAR ST (W)	E LAMAR ST (E)	R	A	2	675	25	16,875	**21**	03/02/23	23	30-21	Failed (30-0)	03/07/19	DEEP PATCH
Dist 6	SUTTERST	SUTTER ST	10	MARIN AVE	VENTURA WAY	R	A	2	1,306	37	48,322	**21**	02/09/23	23	30-21	Failed (30-0)		
Dist 4	TIPPL	TIP PL	10	TOP PL	END	R	A	2	202	32	6,466	**21**	03/03/23	23	30-21	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	ALAMEDAAVE	ALAMEDA AVE	025	MAPLEWOOD DR	E ROMIE LN	C	A	2	943	32	30,176	**20**	01/20/23	24	20-11	Failed (30-0)	09/16/19	DEEP PATCH
Dist 5	APACHECIR	APACHE CIR	10	CHEROKEE DR	END	R	A	2	225	32	7,200	**20**	02/16/23	22	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	AVISCT	AVIS CT	10	MARGARET ST	SYCAMORE RD	R	A	2	563	36	20,268	**20**	03/13/23	22	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	BARCELONAC	BARCELONA CIR	10	CHEROKEE DR	END	R	A	2	475	32	15,200	**20**	02/10/23	22	20-11	Failed (30-0)	07/29/19	DEEP PATCH
Dist 3	CHAMBERLAI	CHAMBERLAIN ST	10	BRUNKEN AVE	ABBOTT ST	R	A	2	671	41	27,511	**20**	01/18/23	22	20-11	Failed (30-0)	01/01/02	CAPE SEAL
Dist 4	CONNELYST	CONNELY ST	15	N SANBORN RD	EUCALYPTUS DR	R	A	2	886	35	31,010	**20**	03/03/23	22	20-11	Failed (30-0)		
Dist 5	DURANCIR	DURAN CIR	10	CHEROKEE DR	END	R	A	2	471	32	15,072	**20**	02/10/23	22	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	IVYST	IVY ST	10	E MARKET ST	GRIFFIN ST	R	A	2	342	32	10,949	**20**	01/18/23	22	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	LAMIRADADR	LA MIRADA DR	15	SAN BRUNO WAY	LA MESA DR	R	A	2	1,125	32	36,002	**20**	01/19/23	22	20-11	Failed (30-0)		
Dist 3	PARKST	PARK ST	030	NACIONAL ST	BELMONT DR	R	A	2	1,524	32	48,768	**20**	03/16/23	22	20-11	Failed (30-0)	10/18/19	DEEP PATCH
Dist 5	PUEBLODR	PUEBLO DR	15	ADAMS ST	N 1ST ST	R	A	2	2,447	32	78,314	**20**	02/16/23	22	20-11	Failed (30-0)	02/22/19	DEEP PATCH
Dist 1	RIDERAVE	RIDER AVE	020	LAS CASITAS DR	MIMBRERA WAY	C	A	2	1,222	38	46,436	**20**	02/01/23	24	20-11	Failed (30-0)	04/02/19	DEEP PATCH
Dist 3	SANANGELOD	SAN ANGELO DR	15	SANTA CRUZ AVE	LA MESA DR	R	A	2	1,918	37	70,966	**20**	01/18/23	22	20-11	Failed (30-0)		
Dist 6	SAUSALDR	SAUSAL DR	10	PESCADERO DR	CAMBRIAN DR	R	A	2	719	32	23,018	**20**	02/04/23	22	20-11	Failed (30-0)	07/29/19	DEEP PATCH
Dist 4	SUNST	SUN ST	30	E MARKET ST	COMMISSION ST	R	A	2	271	32	8,696	**20**	01/26/23	22	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	TYLERST	TYLER ST	15	N 4TH ST	W LAUREL DR	R	A	2	1,429	31	44,299	**20**	02/17/23	22	20-11	Failed (30-0)	08/05/19	DEEP PATCH
Dist 5	TYLERST	TYLER ST	35	IRIS DR	S END	R	A	2	417	32	13,344	**20**	02/17/23	22	20-11	Failed (30-0)	11/12/19	DEEP PATCH
Dist 3	VICTORST	VICTOR ST	010	VICTOR WY	W ROSSI ST	R	A	2	713	41	29,233	**20**	03/02/23	22	20-11	Failed (30-0)		
Dist 5	ASHBURYWAY	ASHBURY WAY	10	ADOBE DR	VICTOR ST	R	A	2	1,056	32	33,817	**19**	03/02/23	21	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 6	ATHERTONWA	ATHERTON WAY	20	CAMBRIAN DR	MILLBRAE ST	R	A	2	2,573	37	95,201	**19**	02/04/23	21	20-11	Failed (30-0)	09/16/19	DEEP PATCH
Dist 2	BARDINCIR	BARDIN CIR	010	BARDIN WAY (N)	BARDIN WAY (S)	R	A	2	1,043	32	33,376	**19**	03/15/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	HOWARDST	HOWARD ST	10	SALINAS ST	LINCOLN AVE	R	C	2	225	32	7,200	**19**	01/26/23	21	20-11	Failed (30-0)		
Dist 5	INCAWAY	INCA WAY	15	SHAWNEE WAY	ADAMS ST	R	A	2	981	32	31,398	**19**	02/16/23	21	20-11	Failed (30-0)		
Dist 3	INDUSTRIAL	INDUSTRIAL ST	10	VERTIN AVE	SANBORN PL	R	A	2	1,027	41	42,107	**19**	01/17/23	21	20-11	Failed (30-0)	01/01/02	SLURRY SEAL
Dist 4	KIPDR	KIP DR	10	BLOCK AVE	E ALVIN DR	R	A	2	756	37	27,972	**19**	02/09/23	21	20-11	Failed (30-0)	11/12/19	DEEP PATCH
Dist 3	MALARINST	MALARIN ST	10	ABBOTT ST	BRUNKEN AVE	R	A	2	674	42	28,308	**19**	01/18/23	21	20-11	Failed (30-0)	01/01/02	CAPE SEAL
Dist 5	N1STST	N 1ST ST	045	W ALVIN DR	W CURTIS ST	R	A	2	2,226	38	84,588	**19**	02/17/23	21	20-11	Failed (30-0)	11/07/19	DEEP PATCH
Dist 5	NAVAJODR	NAVAJO DR	45	N 1ST ST	N MAIN ST	C	A	2	750	41	30,750	**19**	02/16/23	23	20-11	Failed (30-0)		
Dist 4	PRADERST	PRADER ST	10	RIANDA ST	E ALISAL ST	R	A	2	313	37	11,581	**19**	01/18/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 1	RIDERAVE	RIDER AVE	005	GEE ST	GARNER AVE	R	A	2	757	38	28,766	**19**	02/01/23	21	20-11	Failed (30-0)	03/06/19	DEEP PATCH
Dist 3	SANANTONI1	SAN ANTONIO DR	10	W ROMIE LN	W ACACIA ST	R	A	2	775	32	24,819	**19**	01/23/23	21	20-11	Failed (30-0)	03/06/19	DEEP PATCH
Dist 3	SANCLEMENT	SAN CLEMENTE AVE	15	KIRKWOOD AVE	NACIONAL ST	R	C	2	679	32	21,728	**19**	03/16/23	21	20-11	Failed (30-0)		
Dist 3	SANMARINOW	SAN MARINO WAY	10	E ROMIE LN	SANTA CRUZ AVE	R	A	2	473	41	19,393	**19**	01/18/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANVINCENT	SAN VINCENTE AVE	010	W ALISAL ST	SANTA PAULA DR	C	A	2	1,145	32	36,640	**19**	01/24/23	23	20-11	Failed (30-0)	05/16/19	DEEP PATCH
Dist 3	SANTAPAULA	SANTA PAULA DR	15	W ALISAL ST	SAN VINCENTE AVE	R	A	2	879	32	28,148	**19**	01/25/23	21	20-11	Failed (30-0)	07/05/19	DEEP PATCH
Dist 5	SEMINOLEWA	SEMINOLE WAY	10	SHAWNEE WAY	CHEROKEE DR	R	A	2	926	32	29,656	**19**	02/16/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	SENECAPL	SENECA PL	10	CHEROKEE DR	END	R	A	2	367	32	11,744	**19**	02/16/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 4	SUNST	SUN ST	40	COMMISSION ST	END	R	A	2	454	41	18,625	**19**	01/26/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	TARPCIR	TARP CIR	10	SIMAS ST	END	R	A	2	339	37	12,543	**19**	03/17/23	21	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	BELLEHAVEN	BELLEHAVEN ST	15	WILLIAMS RD	TOWT ST	R	A	2	1,684	32	53,900	**18**	03/13/23	20	20-11	Failed (30-0)	02/27/19	DEEP PATCH
Dist 3	CYPRESSST	CYPRESS ST	10	CENTRAL AVE	END	R	A	2	238	37	8,806	**18**	01/25/23	20	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 3	FAIRFAXCIR	FAIRFAX CIR	10	W ALISAL ST	END	R	A	2	232	32	7,452	**18**	01/25/23	20	20-11	Failed (30-0)	07/11/19	SHALLOW PATCH
Dist 5	GARFIELDCI	GARFIELD CIR	10	SWANER AVE	END	R	A	2	155	26	4,030	**18**	03/02/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	LAMESAWAY	LA MESA WAY	10	LA MESA DR	E BLANCO RD	R	A	2	135	37	4,995	**18**	01/18/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	LAPOSADAWA	LA POSADA WAY	10	SHERWOOD DR	LA POSADA DR	R	A	2	135	32	4,320	**18**	02/17/23	20	20-11	Failed (30-0)	01/01/07	SLURRY SEAL
Dist 3	NACACIACIR	N ACACIA CIR	10	W ACACIA ST	END	R	A	2	156	32	4,993	**18**	03/16/23	20	20-11	Failed (30-0)	08/28/20	SKIN PATCH
Dist 5	NAVAJODR	NAVAJO DR	35	MOHAWK AVE	N 1ST ST	C	A	2	946	37	35,002	**18**	02/16/23	22	20-11	Failed (30-0)		
Dist 5	RUSSELLRD	RUSSELL RD	60	PAUL AVE	SAN JUAN GRADE RD	A	A	2	332	32	10,624	**18**	02/09/23	21	20-11	Failed (30-0)	01/09/19	DEEP PATCH
Dist 3	SALINASST	SALINAS ST	20	JOHN ST	CLAY ST	A	A	2	336	38	12,768	**18**	01/26/23	21	20-11	Failed (30-0)	10/31/19	SHALLOW PATCH
Dist 3	SANTAROSAA	SANTA ROSA AVE	10	NACIONAL ST	PARK ST	R	A	2	466	32	14,921	**18**	03/16/23	20	20-11	Failed (30-0)	03/25/19	SHALLOW PATCH
Dist 2	SKYPL	SKY PL	10	ALMA AVE	END	R	A	2	245	32	7,855	**18**	03/13/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	STANNDR	ST ANN DR	10	BELMONT DR	ARCHER ST	R	A	2	1,256	32	40,214	**18**	03/16/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	BELAIRWAY	BEL AIR WAY	10	W ACACIA ST	FAIRFAX DR	R	A	2	423	32	13,558	**17**	01/25/23	19	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	CHEROKEECT	CHEROKEE CT	10	CHEROKEE DR (N)	CHEROKEE DR (S)	R	A	2	1,646	32	52,686	**17**	02/16/23	19	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 5	DURANST	DURAN ST	10	CHEROKEE DR	SEVILLE ST	R	A	2	1,052	32	33,664	**17**	02/10/23	19	20-11	Failed (30-0)	03/26/19	DEEP PATCH
Dist 3	FRONTST	FRONT ST	070WB	PCC END	MERGE TO E MARKET ST	A	A	1	434	18	7,812	**17**	02/10/23	20	20-11	Failed (30-0)		
Dist 2	GARNERAVE	GARNER AVE	030	N SANBORN RD	BEECH ST	C	A	2	1,224	42	51,408	**17**	02/02/23	21	20-11	Failed (30-0)	05/21/19	DEEP PATCH
Dist 3	PARAISOCT	PARAISO CT	10	VIA PARAISO (N)	VIA PARAISO (S)	R	A	2	970	32	31,040	**17**	01/19/23	20	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 5	PIMACIR	PIMA CIR	10	CHEROKEE DR	END	R	A	2	180	32	5,760	**17**	02/16/23	19	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	SANTAMONIC	SANTA MONICA CT	10	SANTA MONICA WAY	END	R	A	2	363	35	12,705	**17**	01/24/23	19	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 3	STANFORDAV	STANFORD AVE	10	HASTINGS AVE	LEMOS AVE	R	A	2	678	32	21,708	**17**	01/25/23	19	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 2	DEWEYAVE	DEWEY AVE	10	BEECH ST	TOWT ST	R	A	2	412	52	21,424	**16**	03/13/23	18	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	OREGONST	OREGON ST	10	N SANBORN RD	WASHINGTON DR	C	A	2	191	38	7,276	**16**	03/03/23	20	20-11	Failed (30-0)	03/20/19	DEEP PATCH
Dist 4	PEACHDR	PEACH DR	15	CALLE CEBU	COMMISSION ST	R	A	2	952	32	30,488	**16**	01/26/23	18	20-11	Failed (30-0)	06/17/19	DEEP PATCH
Dist 1	RIDERAVE	RIDER AVE	010	GARNER AVE	LAS CASITAS DR	C	A	2	1,864	38	70,832	**16**	02/01/23	20	20-11	Failed (30-0)		
Dist 2	SANBENITOS	SAN BENITO ST	020	S MADEIRA AVE	END	R	A	2	398	42	16,716	**16**	01/19/23	18	20-11	Failed (30-0)		
Dist 4	TOPPL	TOP PL	15	CEDAR ST	END	R	A	2	422	26	10,972	**16**	03/03/23	18	20-11	Failed (30-0)		
Dist 3	VIAPARAISO	VIA PARAISO	25	LOS PALOS DR	LA MESA DR	R	A	2	1,626	32	52,052	**16**	01/19/23	19	20-11	Failed (30-0)	06/25/21	SKIN PATCH
Dist 3	ABBOTTPL	ABBOTT PL	15	N END	S END	R	A	2	787	44	34,628	**15**	01/18/23	17	20-11	Failed (30-0)		
Dist 4	BRIDGEST	BRIDGE ST	10	N MAIN ST	E MENKE ST	R	A	2	680	24	16,320	**15**	03/17/23	17	20-11	Failed (30-0)		
Dist 5	CACERASCIR	CACERAS CIR	10	CHEROKEE DR	END	R	A	2	480	32	15,360	**15**	02/10/23	17	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 2	PEARLALY	PEARL ALY	10	S PEARL ST	220' E/O S PEARL ST	R	A	2	220	20	4,400	**15**	01/19/23	17	20-11	Failed (30-0)		
Dist 2	WIRENST	WIREN ST	10	WILLIAMS RD	N. END	R	A	2	1,000	32	32,000	**15**	03/15/23	17	20-11	Failed (30-0)	01/01/91	CAPE SEAL
Dist 2	JOHNCIR	JOHN CIR	10	JOHN ST	END	R	A	2	273	32	8,761	**14**	01/17/23	17	20-11	Failed (30-0)	01/01/01	CAPE SEAL
Dist 4	OREGONST	OREGON ST	20	WASHINGTON DR	TOWT ST	C	A	2	1,466	38	55,713	**14**	03/03/23	18	20-11	Failed (30-0)	02/07/19	DEEP PATCH
Dist 3	RIKERST	RIKER ST	010	W MARKET ST	320' S/O W MARKET ST	R	A	2	320	37	11,840	**14**	01/23/23	16	20-11	Failed (30-0)		
Dist 3	SANVINCENT	SAN VINCENTE AVE	020	SANTA PAULA DR	W ACACIA ST	C	A	2	567	32	18,144	**14**	01/24/23	18	20-11	Failed (30-0)	05/16/19	DEEP PATCH
Dist 2	MORTENSENA	MORTENSEN AVE	020	SKYWAY BLVD	MERCER WAY	R	A	2	1,028	55	56,540	**13**	01/17/23	16	20-11	Failed (30-0)		
Dist 4	NFILICEST	N FILICE ST	10	E ALISAL ST	N END (BARRICADE)	R	A	2	105	44	4,620	**13**	03/17/23	15	20-11	Failed (30-0)		
Dist 1	TOWTST	TOWT ST	020	MAE AVE	DEL MONTE AVE	C	A	2	1,000	32	32,000	**13**	02/03/23	17	20-11	Failed (30-0)	01/01/01	SLURRY SEAL
Dist 4	CHERRYDR	CHERRY DR	10	SHERWOOD DR	PEACH DR	R	A	2	701	32	22,459	**12**	01/26/23	15	20-11	Failed (30-0)	03/26/19	DEEP PATCH
Dist 2	GARNERAVE	GARNER AVE	040	BEECH ST	1ST AVE	C	A	2	1,494	41	61,254	**11**	02/02/23	15	20-11	Failed (30-0)	04/05/19	DEEP PATCH
Dist 2	TOWTST	TOWT ST	030	DEL MONTE AVE	CORTEZ ST	C	A	2	768	36	27,648	**11**	02/03/23	15	20-11	Failed (30-0)	03/20/19	DEEP PATCH
Dist 4	SUNST	SUN ST	20	CALLE CEBU	E MARKET ST	R	A	2	683	32	21,856	**10**	01/26/23	13	10-0	Failed (30-0)	08/07/19	DEEP PATCH
Dist 3	BURTONAVE	BURTON AVE	10	HARKINS RD	END	R	A	2	1,180	42	49,560	**9**	01/17/23	12	10-0	Failed (30-0)	05/21/19	DEEP PATCH
Dist 2	JEFFERYAVE	JEFFERY AVE	10	SKYWAY BLVD	MERCER WAY	R	A	2	1,043	36	37,564	**9**	01/17/23	12	10-0	Failed (30-0)		
Dist 3	MARTELLAST	MARTELLA ST	30	W LAKE ST	SOUTH END	R	A	2	175	32	5,600	**9**	03/16/23	11	10-0	Failed (30-0)	03/06/19	DEEP PATCH
Dist 4	BRIDGEST	BRIDGE ST	20	E MENKE ST	E ROSSI ST	R	A	2	410	30	12,300	**8**	03/17/23	10	10-0	Failed (30-0)	01/02/19	DEEP PATCH
Dist 1	CAOBAWAY	CAOBA WAY	20	AMARILLO WAY	END	R	A	2	169	37	6,253	**7**	02/01/23	10	10-0	Failed (30-0)		
Dist 3	DAYTONST	DAYTON ST	10	HARKINS RD	END	R	A	2	1,635	42	68,670	**7**	01/17/23	10	10-0	Failed (30-0)	07/05/19	DEEP PATCH
Dist 3	VALEST	VALE ST	10	W MARKET ST	END	R	A	2	234	47	10,998	**7**	03/15/23	9	10-0	Failed (30-0)		

City of Salinas - 2023 PMP Update
Reference Reports - Sections Sorted by PCI (High to Low)

District	Street ID	Road Name	Section ID	Begin Location	End Location	FC	ST	Lanes	Length	Width	Area	Current PCI (10-11-23)	Last Calc PCI Date	Last Calc PCI	PCI Range	Condition Category	Last MnR Date	Last MnR Treatment
Dist 2	ANDERSONAV	ANDERSON AVE	10	SKYWAY BLVD	MERCER WAY	R	A	2	1,045	37	38,680	**6**	01/17/23	9	10-0	Failed (30-0)		
Dist 3	CALIFORNIA	CALIFORNIA ALY	030	E SAN LUIS ST	END	R	A	2	420	18	7,560	**6**	01/20/23	9	10-0	Failed (30-0)		
Dist 2	HAVENALY	HAVEN ALY	010	WEST END	FAIRHAVEN ST	R	A	2	307	16	4,912	**5**	03/13/23	7	10-0	Failed (30-0)		
Dist 3	NEWST	NEW ST	10	W MARKET ST	END	R	A	2	426	30	12,780	**5**	03/15/23	7	10-0	Failed (30-0)		
Dist 1	SELMDR	S ELM DR	10	RIDER AVE	END	R	A	2	325	32	10,400	**3**	03/16/23	5	10-0	Failed (30-0)		
Dist 4	CETENTR	C.E.T. ENTRANCE	010	NAVAJO DR	END	R	A	2	175	32	5,600	**0**	08/31/17	19	10-0	Failed (30-0)		
Dist 4	DIVISIONST	DIVISION ST	10	E MARKET ST	END	R	G	2	230	32	7,360			0	None	Other		
Dist 4	ROSSIALY	ROSSI ALY	010	MARKET WAY	START PCC	R	G	1	510	14	7,140			0	None	Other		

City of Salinas

Current PCI Condition

Printed: 10/11/2023

Feature Legend

- **Category I - Excellent/ Good**
- **Category II - Fair (Non-Load)**
- **Category III - Fair (Load)**
- **Category IV - Poor**
- **Category V - Failed**

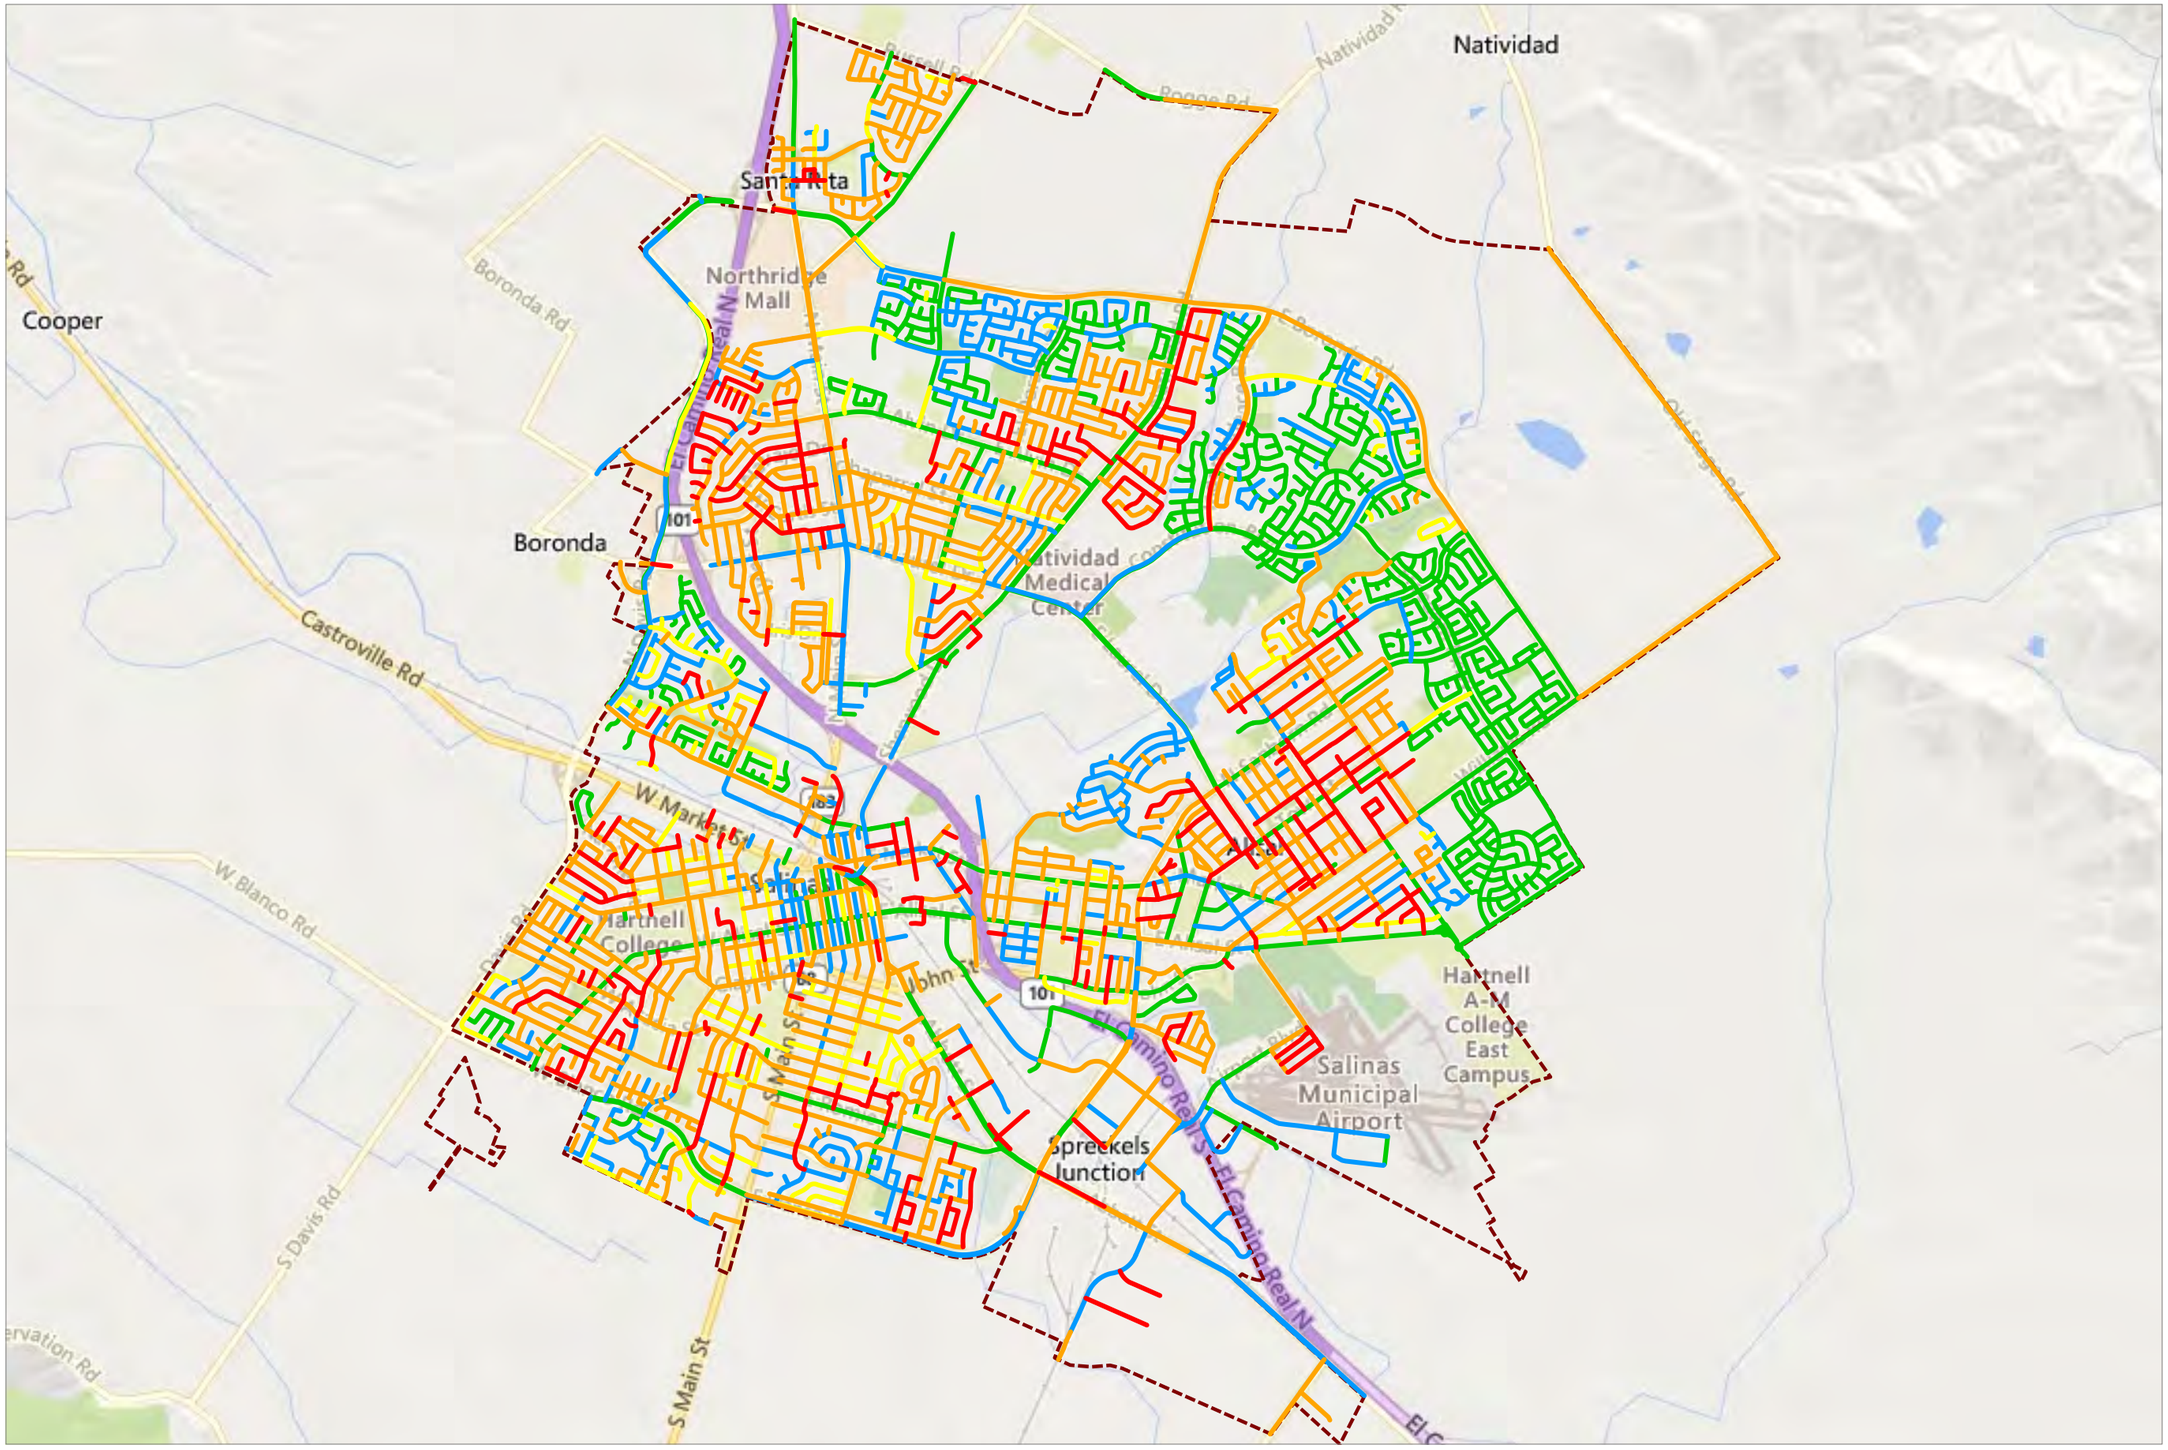

City of Salinas

Functional Class

Feature Legend

- A - Arterial
- C - Collector
- R - Residential/Local

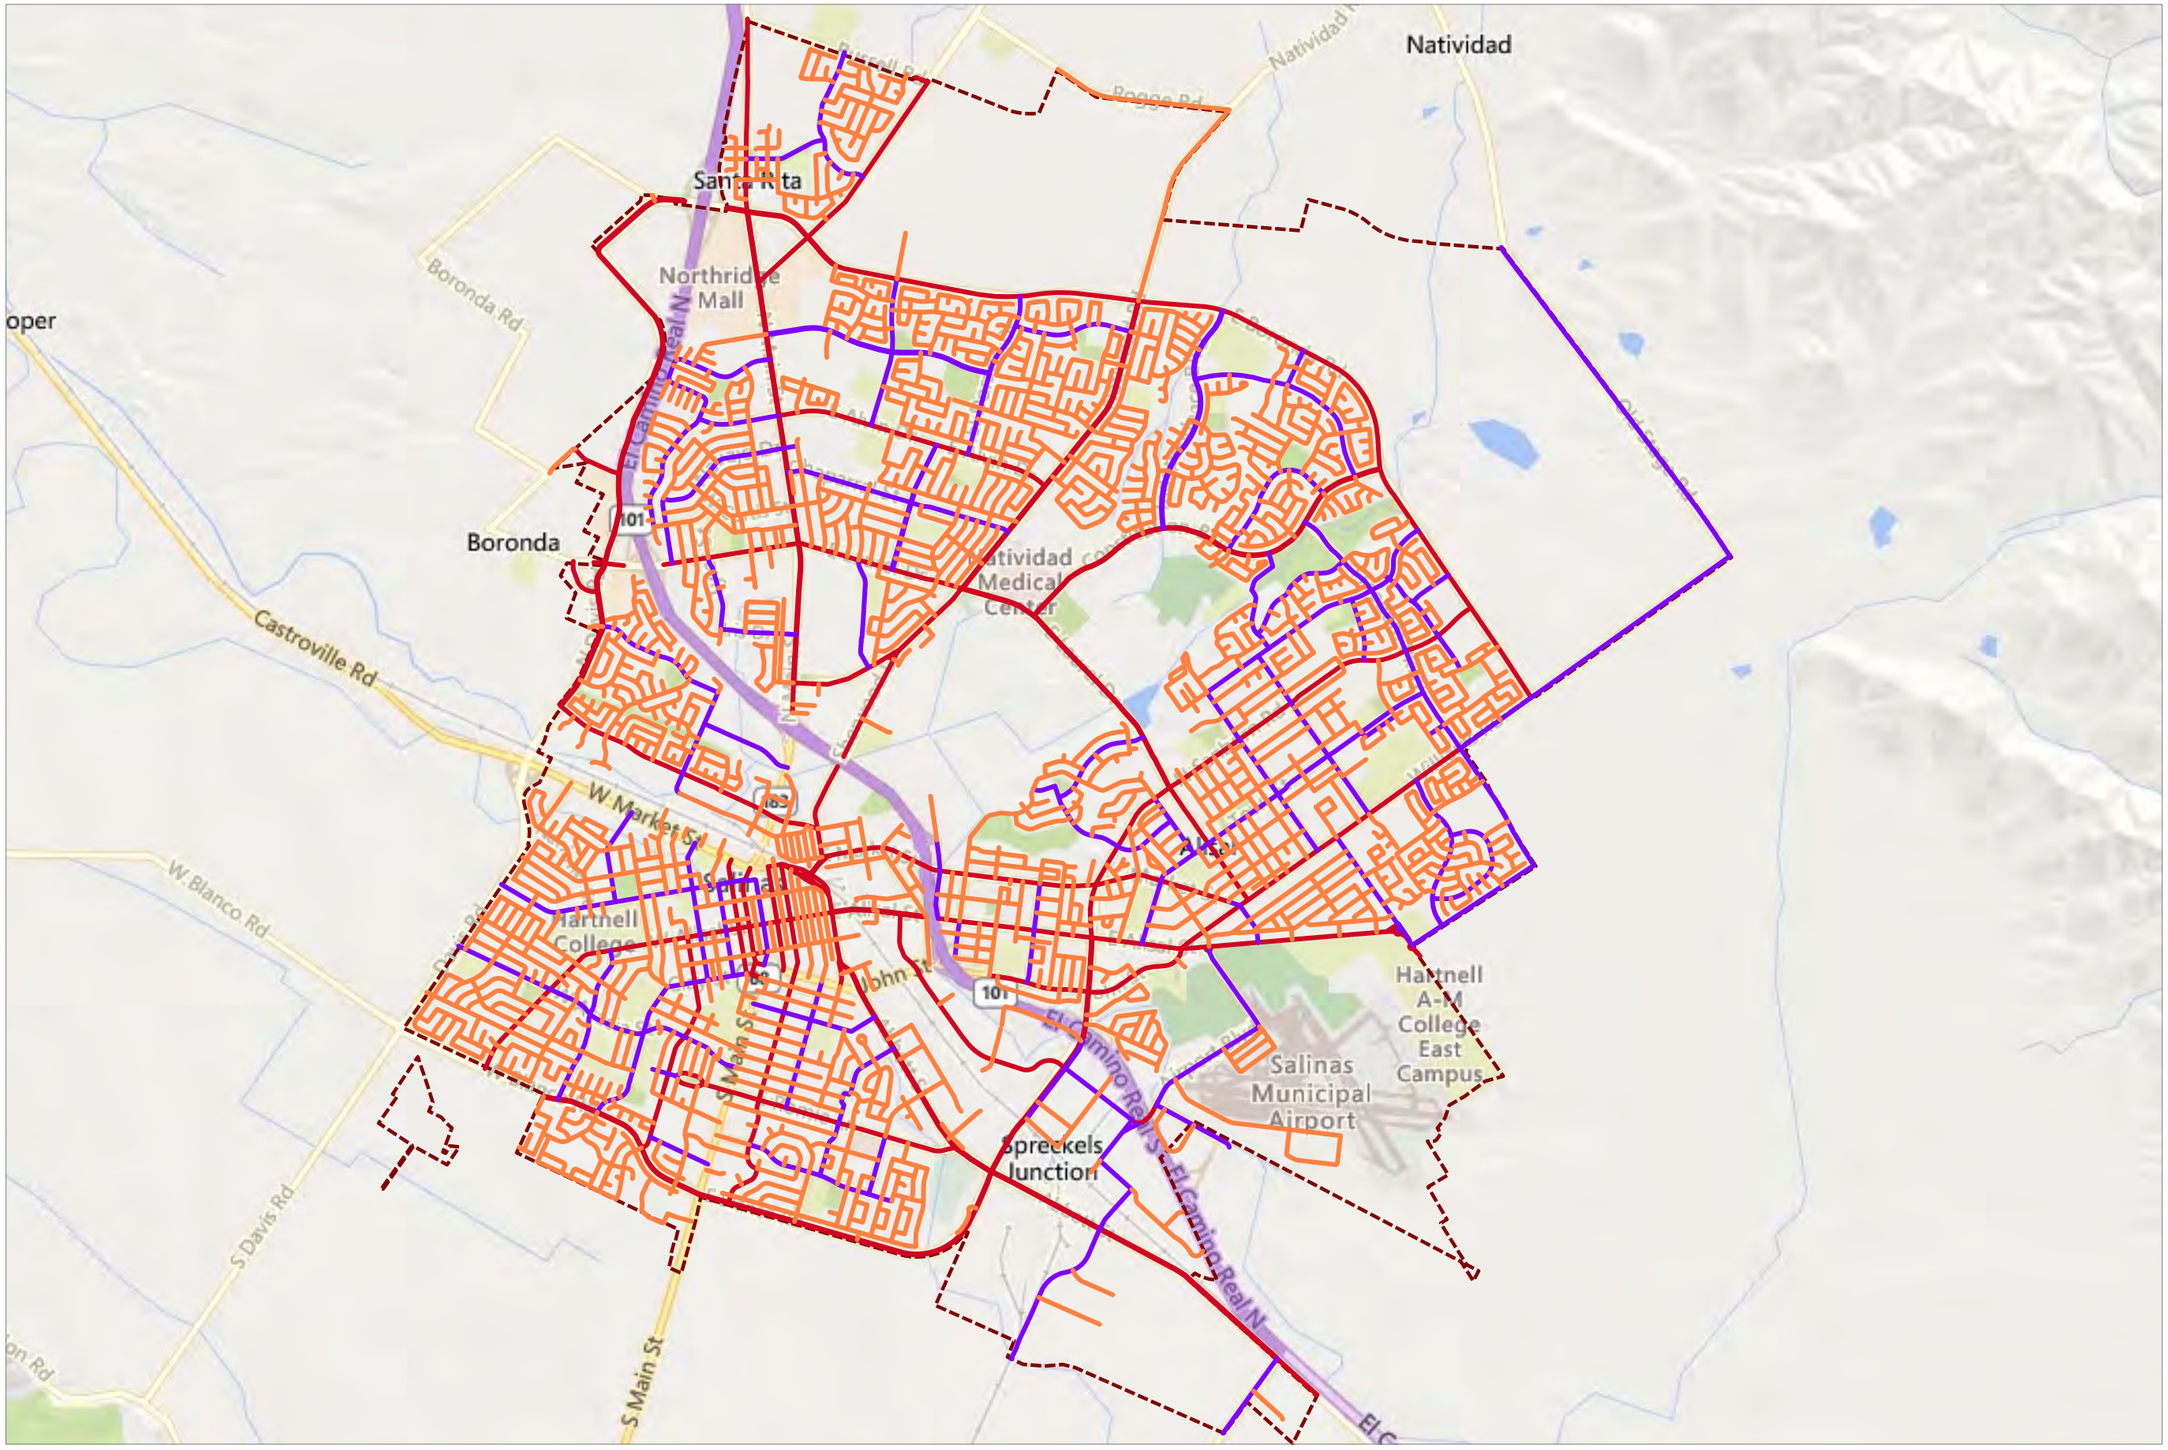

City of Salinas

Current PCI Condition

Printed: 10/11/2023

Feature Legend

- **Category I - Good**
- **Category II - Fair (Non-Load)**
- **Category III - Fair (Load)**

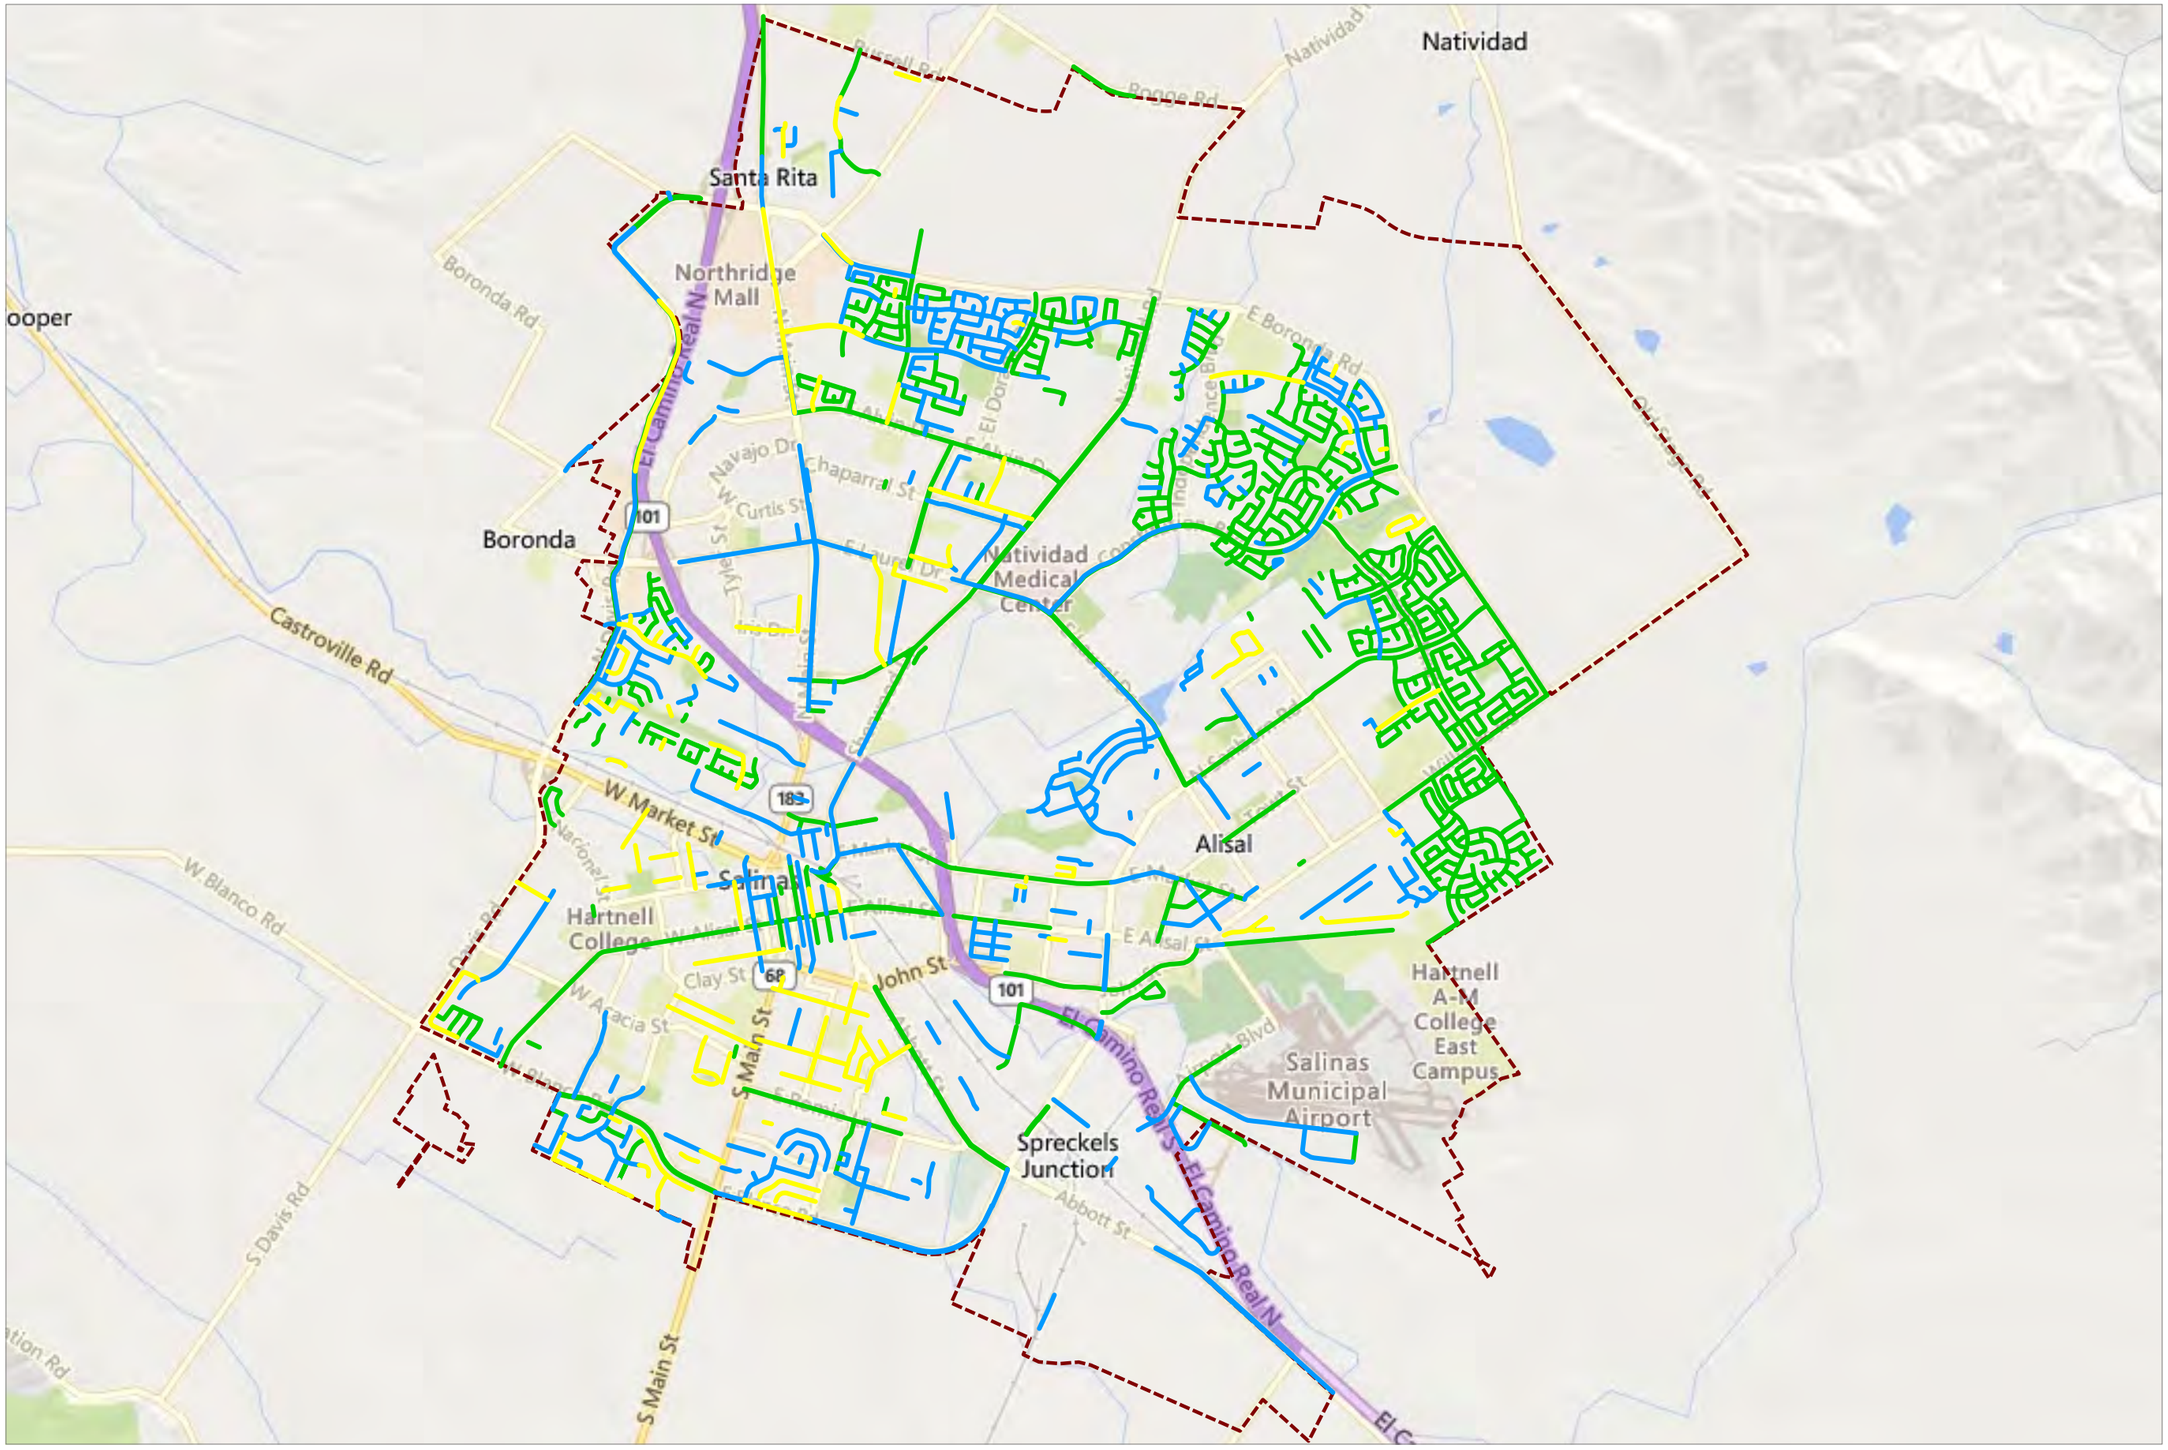

Appendix A
Summarized System Information

City of Salinas

Network Summary Statistics

Printed: 10/11/2023

	Total Sections	Total Center Miles	Total Lane Miles	Total Area (sq. ft.)	PCI
Arterial	279	51.20	177.46	16,532,638.77	62
Collector	188	46.59	106.97	10,432,533.97	52
Residential/Local	1,253	194.17	388.16	35,324,561.24	49
Total	1,720	291.96	672.59	62,289,733.98	
				Overall Network PCI as of 10/11/2023:	53
**Combined	2	0.14	0.18	14,500	N/A
Gravel	2	0.14	0.18	14,500	N/A

*** Combined Sections are excluded from totals. These Sections do not have a PCI Date - they have not been inspected or had a Treatment applied.*

City of Salinas

Network Replacement Cost

Printed: 10/02/2023

Functional Class	Surface Type	Lane Miles	Unit Cost/ Square Foot	Pavement Area/ Square Feet	Cost To Replace/ (in thousands)
Arterial	AC	134.1	$19.60	12,827,528	$251,420
	AC/AC	19.9	$19.60	1,641,565	$32,175
	AC/PCC	7.2	$19.60	775,506	$15,200
	PCC	16.3	$19.60	1,288,039	$25,246
Collector	AC	95.9	$18.20	9,250,424	$168,358
	AC/AC	3.3	$18.20	316,458	$5,760
	AC/PCC	5.2	$18.20	596,066	$10,848
	PCC	2.5	$18.20	269,586	$4,906
Residential/Local	AC	353.7	$16.80	32,233,597	$541,524
	AC/AC	2.6	$16.80	254,877	$4,282
	AC/PCC	12.5	$16.80	1,190,576	$20,002
	PCC	19.3	$16.80	1,645,511	$27,645
	Grand Total:	672.6		62,289,733	$1,107,364

Decision Tree

Printed: 9/29/2023

Functional Class	Surface	Condition Category	Treatment Type	Treatment	Cost/Sq Yd, except Seal Cracks in LF:	Yrs Between Crack Seals	Yrs Between Surface Seals	# of Surface Seals before Overlay
Arterial	AC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.56	4		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		8	
			Restoration Treatment	LIGHT REHAB	$50.40			2
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$13.86		8	
		III - Good, Load Related		LIGHT REHAB	$50.40			
		IV - Poor		HEAVY REHAB	$104.71			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$176.40			
	AC/AC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.56	4		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		8	
			Restoration Treatment	LIGHT REHAB	$50.40			2
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$13.86		8	
		III - Good, Load Related		LIGHT REHAB	$50.40			
		IV - Poor		HEAVY REHAB	$104.71			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$176.40			
	AC/PCC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.56	4		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		8	
			Restoration Treatment	LIGHT REHAB	$50.40			2
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$13.86		8	
		III - Good, Load Related		LIGHT REHAB	$50.40			
		IV - Poor		HEAVY REHAB	$104.71			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$176.40			

Functional Class and Surface combination not used

Selected Treatment is not a Surface Seal

Decision Tree

Printed: 9/29/2023

Functional Class	Surface	Condition Category	Treatment Type	Treatment	Cost/Sq Yd, except Seal Cracks in LF:	Yrs Between Crack Seals	Yrs Between Surface Seals	# of Surface Seals before Overlay
Arterial	PCC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.56	4		
			Surface Treatment	DO NOTHING	$0.00		15	
			Restoration Treatment	DO NOTHING	$0.00			99
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		HEAVY REHAB	$104.71			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$176.40			
	ST	I - Very Good	Crack Treatment	DO NOTHING	$0.00	9		
			Surface Treatment	DO NOTHING	$0.00		15	
			Restoration Treatment	DO NOTHING	$0.00			99
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		DO NOTHING	$0.00			
		V - Very Poor		DO NOTHING	$0.00			

Functional Class and Surface combination not used

Selected Treatment is not a Surface Seal

Decision Tree

Printed: 9/29/2023

Functional Class	Surface	Condition Category	Treatment Type	Treatment	Cost/Sq Yd, except Seal Cracks in LF:	Yrs Between Crack Seals	Yrs Between Surface Seals	# of Surface Seals before Overlay
Collector	AC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	4		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		8	
			Restoration Treatment	LIGHT REHAB	$44.10			3
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$12.60		8	
		III - Good, Load Related		LIGHT REHAB	$44.10			
		IV - Poor		HEAVY REHAB	$91.35			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$163.80			
	AC/AC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	4		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		8	
			Restoration Treatment	LIGHT REHAB	$44.10			3
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$12.60		8	
		III - Good, Load Related		LIGHT REHAB	$44.10			
		IV - Poor		HEAVY REHAB	$91.35			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$163.80			
	AC/PCC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	4		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		8	
			Restoration Treatment	LIGHT REHAB	$44.10			3
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$12.60		8	
		III - Good, Load Related		LIGHT REHAB	$44.10			
		IV - Poor		HEAVY REHAB	$91.35			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$163.80			

Functional Class and Surface combination not used

Selected Treatment is not a Surface Seal

Decision Tree

Printed: 9/29/2023

Functional Class	Surface	Condition Category	Treatment Type	Treatment	Cost/Sq Yd, except Seal Cracks in LF:	Yrs Between Crack Seals	Yrs Between Surface Seals	# of Surface Seals before Overlay
Collector	PCC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	4		
			Surface Treatment	DO NOTHING	$0.00		15	
			Restoration Treatment	DO NOTHING	$0.00			99
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		HEAVY REHAB	$91.35			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$163.80			
	ST	I - Very Good	Crack Treatment	DO NOTHING	$0.00	9		
			Surface Treatment	DO NOTHING	$0.00		15	
			Restoration Treatment	DO NOTHING	$0.00			99
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		DO NOTHING	$0.00			
		V - Very Poor		DO NOTHING	$20.00			

Functional Class and Surface combination not used

Selected Treatment is not a Surface Seal

Decision Tree

Printed: 9/29/2023

Functional Class	Surface	Condition Category	Treatment Type	Treatment	Cost/Sq Yd, except Seal Cracks in LF:	Yrs Between Crack Seals	Yrs Between Surface Seals	# of Surface Seals before Overlay
Residential/Local	AC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	5		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		10	
			Restoration Treatment	LIGHT REHAB	$44.10			3
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$12.60		10	
		III - Good, Load Related		LIGHT REHAB	$44.10			
		IV - Poor		HEAVY REHAB	$75.60			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$151.20			
	AC/AC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	5		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		10	
			Restoration Treatment	LIGHT REHAB	$44.10			3
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$12.60		10	
		III - Good, Load Related		LIGHT REHAB	$44.10			
		IV - Poor		HEAVY REHAB	$75.60			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$151.20			
	AC/PCC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	5		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		10	
			Restoration Treatment	LIGHT REHAB	$44.10			3
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$12.60		10	
		III - Good, Load Related		LIGHT REHAB	$44.10			
		IV - Poor		HEAVY REHAB	$75.60			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$151.20			

Functional Class and Surface combination not used

Selected Treatment is not a Surface Seal

Decision Tree

Printed: 9/29/2023

Functional Class	Surface	Condition Category	Treatment Type	Treatment	Cost/Sq Yd, except Seal Cracks in LF:	Yrs Between Crack Seals	Yrs Between Surface Seals	# of Surface Seals before Overlay
Residential/Local	PCC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	5		
			Surface Treatment	DO NOTHING	$0.00		15	
			Restoration Treatment	DO NOTHING	$0.00			99
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		HEAVY REHAB	$75.60			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$151.20			
	ST	I - Very Good	Crack Treatment	DO NOTHING	$0.00	9		
			Surface Treatment	DO NOTHING	$0.00		15	
			Restoration Treatment	DO NOTHING	$0.00			99
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		DO NOTHING	$0.00			
		V - Very Poor		DO NOTHING	$0.00			

Functional Class and Surface combination not used

Selected Treatment is not a Surface Seal

Decision Tree

Printed: 9/29/2023

Functional Class	Surface	Condition Category	Treatment Type	Treatment	Cost/Sq Yd, except Seal Cracks in LF:	Yrs Between Crack Seals	Yrs Between Surface Seals	# of Surface Seals before Overlay
Other	AC	I - Very Good	Crack Treatment	SEAL CRACKS	$1.25	5		
			Surface Treatment	LIGHT MAINTENANCE	$6.53		10	
			Restoration Treatment	LIGHT REHAB	$44.10			3
		II - Good, Non-Load Related		HEAVY MAINTENANCE	$12.60		10	
		III - Good, Load Related		LIGHT REHAB	$44.10			
		IV - Poor		HEAVY REHAB	$75.60			
		V - Very Poor		RECONSTRUCT STRUCTURE (AC)	$151.20			
	AC/AC	I - Very Good	Crack Treatment	DO NOTHING	$0.00	9		
			Surface Treatment	DO NOTHING	$0.00		10	
			Restoration Treatment	DO NOTHING	$0.00			3
		II - Good, Non-Load Related		DO NOTHING	$16.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		DO NOTHING	$0.00			
		V - Very Poor		DO NOTHING	$0.00			
	AC/PCC	I - Very Good	Crack Treatment	DO NOTHING	$0.00	5		
			Surface Treatment	DO NOTHING	$0.00		10	
			Restoration Treatment	DO NOTHING	$0.00			3
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		DO NOTHING	$0.00			
		V - Very Poor		DO NOTHING	$0.00			

Functional Class and Surface combination not used

Selected Treatment is not a Surface Seal

Decision Tree

Printed: 9/29/2023

Functional Class	Surface	Condition Category	Treatment Type	Treatment	Cost/Sq Yd, except Seal Cracks in LF:	Yrs Between Crack Seals	Yrs Between Surface Seals	# of Surface Seals before Overlay
Other	PCC	I - Very Good	Crack Treatment	DO NOTHING	$0.00	5		
			Surface Treatment	DO NOTHING	$0.00		15	
			Restoration Treatment	DO NOTHING	$0.00			99
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		DO NOTHING	$0.00			
		V - Very Poor		DO NOTHING	$0.00			
	ST	I - Very Good	Crack Treatment	DO NOTHING	$0.00	9		
			Surface Treatment	DO NOTHING	$0.00		15	
			Restoration Treatment	DO NOTHING	$0.00			99
		II - Good, Non-Load Related		DO NOTHING	$0.00			
		III - Good, Load Related		DO NOTHING	$0.00			
		IV - Poor		DO NOTHING	$0.00			
		V - Very Poor		DO NOTHING	$0.00			

Functional Class and Surface combination not used

Selected Treatment is not a Surface Seal

Appendix B
Budget Scenarios

Needs Analysis
&
Zero Budget
($378 Million over 5 Years)

- Projected PCI/Cost Summary

City of Salinas

Needs - Projected PCI/Cost Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Year	PCI Treated	PCI Untreated	PM Cost	Rehab Cost	Cost
2024	88	53	$2,140,278	$352,462,413	$354,602,691
2025	83	50	$145,558	$1,369,187	$1,514,745
2026	82	47	$382,288	$4,179,124	$4,561,412
2027	81	45	$4,880,111	$5,102,976	$9,983,088
2028	80	42	$4,044,852	$2,897,697	$6,942,549

	% PM	PM Total Cost	Rehab Total Cost	Total Cost
	3.07%	$11,593,088	$366,011,397	$377,604,485

Increase PCI by 5

($191 Million over 5 Years)

- Pavement Network Condition Lane Miles
- Network Condition Summary
- Cost Summary

Scenario: Increase by 5 (53-58)

Objective: Minimum Network Average PCI | Target: By Year

Year	Value	Year	Value	Year	Value	Year	Value
Year 1	54	Year 2	55	Year 3	56	Year 4	57
Year 5	58						

Annual budget needs to meet target objectives

Year	Arterial	Collector	Res/Loc	Other	Preventative Maintenance	Total
2024	$2,175,079	$1,510,474	$4,537,974	$0	$2,140,278	$8,223,527
2025	$22,662,827	$281,139	$17,755,520	$0	$145,558	$40,699,486
2026	$8,965,101	$2,736,004	$29,683,424	$0	$2,788	$41,384,529
2027	$32,522,126	$10,841,634	$7,399,649	$0	$678,553	$50,763,409
2028	$27,491,233	$5,143,597	$16,951,610	$0	$357,029	$49,586,439

Average Yearly Total: $38,131,478

Grand Total: $190,657,391

Pavement Network prior to treatments in lane miles.

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	62	11.4%	7.7%	14
Collector	51	4.3%	8.3%	7
Residential	49	13.1%	31.3%	11

Pavement Network after schedulable treatments applied in lane miles.

2024

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	63	48.1%	28.9%	15
Collector	53	28.7%	49.5%	8
Residential	50	25.3%	55.3%	12

Pavement Network after schedulable treatments applied in lane miles.

2025

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	67	56.7%	22.3%	16
Collector	49	27.8%	53.6%	7
Residential	51	34.2%	51.7%	13

2026

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	66	53.0%	21.1%	17
Collector	47	27.0%	55.8%	7
Residential	54	43.6%	44.0%	15

2027

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	72	62.4%	12.8%	19
Collector	48	38.5%	49.6%	9
Residential	53	45.0%	44.0%	15

2028

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	76	68.6%	5.1%	20
Collector	47	41.4%	49.6%	10
Residential	53	46.5%	42.2%	16

Target-Driven Scenarios
Network Condition Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: Increase by 5 (53-58)

Objective: Minimum Network Average PCI | Target: By Year

Year	Value	Year	Value	Year	Value	Year	Value
Year 1	54	Year 2	55	Year 3	56	Year 4	57
Year 5	58						

Projected Network Average PCI by year

Year	Never Treated	With Selected Treatment	Without Selected Treatment
2024	53	54	53
2025	50	55	50
2026	47	56	47
2027	45	57	45
2028	42	58	42

Percent Network Area by Functional Classification and Condition Class

Condition in base year 2024, prior to applying treatments.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	11.4%	4.3%	13.1%	0.0%	28.8%
II / III	7.5%	4.1%	12.3%	0.0%	23.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2024 after schedulable treatments applied.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	12.8%	4.8%	14.4%	0.0%	31.9%
II / III	6.1%	3.7%	11.0%	0.0%	20.8%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2028 after schedulable treatments applied.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	18.2%	6.9%	26.4%	0.0%	51.5%
II / III	7.0%	1.5%	6.4%	0.0%	14.9%
IV	1.4%	1.5%	4.8%	0.0%	7.7%
V	0.0%	6.8%	19.1%	0.0%	25.9%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

City of Salinas

Target-Driven Scenarios - Cost Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: Increase by 5 (53-58)

Objective: Minimum Network Average PCI | Target: By Year

Year	Value	Year	Value	Year	Value	Year	Value
Year 1	54	Year 2	55	Year 3	56	Year 4	57
Year 5	58						

Year		Rehabilitation	Preventive Maintenance		Total Cost	Deferred
2024	II	$1,577,737	Non-Project	$2,140,278	$8,223,527	$346,379,164
	III	$4,505,512	Project	$0		
	IV	$0				
	V	$0				
	Total	$6,083,249				
	Project	$0				
2025	II	$3,369,928	Non-Project	$145,558	$40,699,486	$348,869,378
	III	$689,550	Project	$0		
	IV	$36,494,450				
	V	$0				
	Total	$40,553,928				
	Project	$0				
2026	II	$1,136,755	Non-Project	$2,788	$41,384,529	$357,774,623
	III	$1,138,006	Project	$0		
	IV	$39,106,980				
	V	$0				
	Total	$41,381,741				
	Project	$0				
2027	II	$1,575,332	Non-Project	$678,553	$50,763,409	$341,650,887
	III	$223,813	Project	$0		
	IV	$21,450,674				
	V	$26,835,038				
	Total	$50,084,856				
	Project	$0				
2028	II	$170,315	Non-Project	$357,029	$49,586,440	$323,557,765
	III	$241,060	Project	$0		
	IV	$13,452,070				
	V	$35,365,966				
	Total	$49,229,411				
	Project	$0				

Summary

Functional Class	Rehabilitation	Prev. Maint.
Arterial	$92,929,328	$887,038
Collector	$20,093,996	$418,851
Residential/Local	$74,309,860	$2,018,317
Total:	$187,333,184	$3,324,206

Grand Total: $190,657,390

Maintain 53 PCI

($116 Million over 5 Years)

- Pavement Network Condition Lane Miles
- Network Condition Summary
- Cost Summary

Scenario: Maintain 53 PCI

Objective: Minimum Network Average PCI | Target: Overall 53

Annual budget needs to meet target objectives

Year	Arterial	Collector	Res/Loc	Other	Preventative Maintenance	Total
2024	$101,694	$2,346	$281,128	$0	$385,167	$385,167
2025	$1,948,650	$1,329,379	$19,397,824	$0	$1,900,669	$22,675,854
2026	$786,492	$653,204	$25,664,810	$0	$2,788	$27,104,506
2027	$15,481,260	$3,958,486	$13,119,608	$0	$678,553	$32,559,354
2028	$9,311,937	$12,933,185	$11,377,856	$0	$353,922	$33,622,979

Average Yearly Total: $23,269,572
Grand Total: $116,347,859

Pavement Network prior to treatments in lane miles.

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	62	11.4%	7.7%	14
Collector	51	4.3%	8.3%	7
Residential	49	13.1%	31.3%	11

Pavement Network after schedulable treatments applied in lane miles.

2024

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	62	43.0%	28.9%	14
Collector	52	25.8%	49.5%	7
Residential	49	23.0%	55.3%	11

2025

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	60	42.9%	33.9%	14
Collector	49	26.9%	53.6%	7
Residential	51	33.1%	52.3%	13

Pavement Network after schedulable treatments applied in lane miles.

2026

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	58	36.3%	36.9%	13
Collector	45	23.2%	57.6%	7
Residential	53	41.0%	45.9%	15

2027

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	60	43.4%	31.8%	14
Collector	44	28.0%	58.3%	7
Residential	53	44.6%	44.0%	15

2028

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	60	45.3%	28.3%	15
Collector	46	39.6%	51.4%	10
Residential	52	45.2%	43.2%	16

Target-Driven Scenarios
Network Condition Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: Maintain 53 PCI

Objective: Minimum Network Average PCI | Target: Overall 53

Projected Network Average PCI by year

Year	Never Treated	With Selected Treatment	Without Selected Treatment
2024	53	53	53
2025	50	53	50
2026	47	53	47
2027	45	53	45
2028	42	53	42

Percent Network Area by Functional Classification and Condition Class

Condition in base year 2024, prior to applying treatments.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	11.4%	4.3%	13.1%	0.0%	28.8%
II / III	7.5%	4.1%	12.3%	0.0%	23.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2024 after schedulable treatments applied.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	11.4%	4.3%	13.1%	0.0%	28.8%
II / III	7.5%	4.1%	12.3%	0.0%	23.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2028 after schedulable treatments applied.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	12.0%	6.6%	25.6%	0.0%	44.3%
II / III	7.0%	1.5%	6.6%	0.0%	15.1%
IV	3.3%	1.8%	4.9%	0.0%	10.0%
V	4.2%	6.8%	19.6%	0.0%	30.7%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

City of Salinas

Target-Driven Scenarios - Cost Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: Maintain 53 PCI

Objective: Minimum Network Average PCI | Target: Overall 53

Year	Rehabilitation		Preventive Maintenance		Total Cost	Deferred
2024	II	$0	Non-Project	$385,167	$385,167	$354,217,524
	III	$0	Project	$0		
	IV	$0				
	V	$0				
	Total	$0				
	Project	$0				
2025	II	$4,303,273	Non-Project	$1,900,669	$22,675,854	$374,731,370
	III	$4,054,398	Project	$0		
	IV	$12,417,513				
	V	$0				
	Total	$20,775,185				
	Project	$0				
2026	II	$959,859	Non-Project	$2,788	$27,104,505	$397,916,638
	III	$1,138,006	Project	$0		
	IV	$25,003,852				
	V	$0				
	Total	$27,101,717				
	Project	$0				
2027	II	$1,670,150	Non-Project	$678,553	$32,559,354	$400,058,059
	III	$223,813	Project	$0		
	IV	$29,986,838				
	V	$0				
	Total	$31,880,801				
	Project	$0				
2028	II	$170,315	Non-Project	$353,922	$33,622,979	$398,197,581
	III	$241,060	Project	$0		
	IV	$27,983,516				
	V	$4,874,165				
	Total	$33,269,057				
	Project	$0				

Summary

Functional Class	Rehabilitation	Prev. Maint.
Arterial	$26,745,244	$884,789
Collector	$18,458,607	$417,993
Residential/Local	$67,822,909	$2,018,317
Total:	$113,026,760	$3,321,099

Grand Total: $116,347,859

Current Funding
($35 Million over 5 Years)

- Network Condition Summary
- Cost Summary

Scenarios - Network Condition Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: Current Funding

Year	Budget	PM	Year	Budget	PM	Year	Budget	PM
2024	$11,000,000	10%	2026	$6,000,000	10%	2028	$6,000,000	10%
2025	$6,000,000	10%	2027	$6,000,000	10%			

Projected Network Average PCI by Year

Year	Never Treated	With Selected Treatment	Treated Centerline Miles	Treated Lane Miles
2024	53	54	47.96	111.08
2025	50	52	11.92	26.22
2026	47	50	13.18	29.54
2027	45	48	15.56	36.48
2028	42	46	23.16	55.21

Percent Network Area by Functional Class and Condition Category

Condition in base year 2024, prior to applying treatments.

Condition	Arterial	Collector	Res/Loc	Other	Total
I	11.4%	4.3%	13.1%	0.0%	28.8%
II / III	7.5%	4.1%	12.3%	0.0%	23.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2024 after schedulable treatments applied.

Condition	Arterial	Collector	Res/Loc	Other	Total
I	13.5%	4.8%	17.5%	0.0%	35.8%
II / III	5.4%	3.7%	7.9%	0.0%	16.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2028 after schedulable treatments applied.

Condition	Arterial	Collector	Res/Loc	Other	Total
I	8.2%	3.4%	18.0%	0.0%	29.6%
II / III	7.8%	2.3%	6.4%	0.0%	16.5%
IV	6.3%	4.2%	12.3%	0.0%	22.8%
V	4.2%	6.8%	20.1%	0.0%	31.1%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Scenarios Criteria:

Criteria:

City of Salinas

Scenarios - Cost Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: Current Funding

Year	PM	Budget		Rehabilitation		Preventative Maintenance	Surplus PM	Deferred		Stop Gap
2024	10%	$11,000,000	II	$4,859,851	Non-Project	$1,098,490	$1,510	$343,605,467	Funded	$0
			III	$4,909,954					Unmet	$1,179,840
			IV	$128,929	Project	$0				
			V	$0						
			Total	$9,898,734						
			Project	$0						
2025	10%	$6,000,000	II	$644,022	Non-Project	$599,754	$246	$380,798,398	Funded	$0
			III	$285,109					Unmet	$2,043
			IV	$4,467,883	Project	$0				
			V	$0						
			Total	$5,397,014						
			Project	$0						
2026	10%	$6,000,000	II	$799,816	Non-Project	$590,380	$9,620	$425,100,086	Funded	$0
			III	$1,138,006					Unmet	$6,569
			IV	$3,459,883	Project	$0				
			V	$0						
			Total	$5,397,705						
			Project	$0						
2027	10%	$6,000,000	II	$628,677	Non-Project	$594,266	$5,734	$457,516,271	Funded	$0
			III	$120,107					Unmet	$22,278
			IV	$4,648,494	Project	$0				
			V	$0						
			Total	$5,397,278						
			Project	$0						
2028	10%	$6,000,000	II	$88,541	Non-Project	$608,204	$0	$481,180,164	Funded	$0
			III	$207,417					Unmet	$9,645
			IV	$5,075,989	Project	$0				
			V	$0						
			Total	$5,371,947						
			Project	$0						

Summary

Functional Class	Rehabilitation	Prev. Maint.	Funded Stop Gap	Unmet Stop Gap
Arterial	$4,220,856	$886,784	$0	$168,024
Collector	$2,213,756	$325,571	$0	$219,326
Residential/Local	$25,028,066	$2,278,739	$0	$833,025
Grand Total:	$31,462,678	$3,491,094	$0	$1,220,375

Scenarios Criteria:

Criteria:

Increased Funding

($43 Million over 5 Years)

- Network Condition Summary
- Cost Summary

Scenarios - Network Condition Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: Increased Funding

Year	Budget	PM
2024	$11,000,000	10%
2025	$10,000,000	10%

Year	Budget	PM
2026	$10,000,000	10%
2027	$6,000,000	10%

Year	Budget	PM
2028	$6,000,000	10%

Projected Network Average PCI by Year

Year	Never Treated	With Selected Treatment	Treated Centerline Miles	Treated Lane Miles
2024	53	54	47.96	111.08
2025	50	53	17.16	36.61
2026	47	51	12.59	28.34
2027	45	49	15.55	36.45
2028	42	47	23.16	55.21

Percent Network Area by Functional Class and Condition Category

Condition in base year 2024, prior to applying treatments.

Condition	Arterial	Collector	Res/Loc	Other	Total
I	11.4%	4.3%	13.1%	0.0%	28.8%
II / III	7.5%	4.1%	12.3%	0.0%	23.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2024 after schedulable treatments applied.

Condition	Arterial	Collector	Res/Loc	Other	Total
I	13.5%	4.8%	17.5%	0.0%	35.8%
II / III	5.4%	3.7%	7.9%	0.0%	16.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2028 after schedulable treatments applied.

Condition	Arterial	Collector	Res/Loc	Other	Total
I	8.2%	3.4%	19.4%	0.0%	31.0%
II / III	7.8%	2.3%	6.4%	0.0%	16.5%
IV	6.3%	4.2%	10.9%	0.0%	21.4%
V	4.2%	6.8%	20.1%	0.0%	31.1%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

City of Salinas

Scenarios - Cost Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: Increased Funding

Year	PM	Budget		Rehabilitation		Preventative Maintenance	Surplus PM	Deferred		Stop Gap
2024	10%	$11,000,000	II	$4,859,851	Non-Project	$1,098,490	$1,510	$343,605,467	Funded	$0
			III	$4,909,954					Unmet	$1,179,840
			IV	$128,929	Project	$0				
			V	$0						
			Total	$9,898,734						
			Project	$0						
2025	10%	$10,000,000	II	$663,860	Non-Project	$997,910	$2,090	$376,803,742	Funded	$0
			III	$285,109					Unmet	$2,043
			IV	$8,044,546	Project	$0				
			V	$0						
			Total	$8,993,515						
			Project	$0						
2026	10%	$10,000,000	II	$815,108	Non-Project	$192,225	$807,775	$417,908,278	Funded	$0
			III	$1,138,006					Unmet	$6,569
			IV	$7,039,898	Project	$0				
			V	$0						
			Total	$8,993,013						
			Project	$0						
2027	10%	$6,000,000	II	$628,677	Non-Project	$594,266	$5,734	$450,329,587	Funded	$0
			III	$120,107					Unmet	$22,278
			IV	$4,643,370	Project	$0				
			V	$0						
			Total	$5,392,154						
			Project	$0						
2028	10%	$6,000,000	II	$88,541	Non-Project	$611,551	$0	$474,043,655	Funded	$0
			III	$207,417					Unmet	$9,645
			IV	$5,075,989	Project	$0				
			V	$0						
			Total	$5,371,947						
			Project	$0						

Summary

Functional Class	Rehabilitation	Prev. Maint.	Funded Stop Gap	Unmet Stop Gap
Arterial	$4,220,856	$886,784	$0	$168,024
Collector	$2,213,756	$325,572	$0	$219,326
Residential/Local	$32,214,750	$2,282,086	$0	$833,025
Grand Total:	$38,649,362	$3,494,442	$0	$1,220,375

Scenarios Criteria:

Criteria:

Target PCI's

Arterials 75, Collectors 65

($205 Million over 10 Years)

- Pavement Network Condition Lane Miles
- Network Condition Summary
- Cost Summary

Scenario: A-75, C-65

Objective: Minimum Network Average PCI | Target: By Functional Class and Year

Arterial	Value	Collector	Value	Residential/Local	Value	Other	Value
Year 1	63.3	Year 1	53.3	Year 1		Year 1	
Year 2	64.6	Year 2	54.6	Year 2		Year 2	
Year 3	65.9	Year 3	55.9	Year 3		Year 3	
Year 4	67.2	Year 4	57.2	Year 4		Year 4	
Year 5	68.5	Year 5	58.5	Year 5		Year 5	
Year 6	69.8	Year 6	59.8	Year 6		Year 6	
Year 7	71.1	Year 7	61.1	Year 7		Year 7	
Year 8	72.4	Year 8	62.4	Year 8		Year 8	
Year 9	73.7	Year 9	63.7	Year 9		Year 9	
Year 10	75	Year 10	65	Year 10		Year 10	

Annual budget needs to meet target objectives

Year	Arterial	Collector	Res/Loc	Other	Preventative Maintenance	Total
2024	$2,856,350	$3,163,583	$0	$0	$182,668	$6,019,934
2025	$13,375,993	$9,699,839	$0	$0	$131,819	$23,075,832
2026	$16,466,549	$10,859,395	$0	$0	$2,741	$27,325,944
2027	$14,608,578	$10,964,990	$0	$0	$639,528	$25,573,568
2028	$14,159,216	$9,990,299	$0	$0	$349,373	$24,149,515
2029	$14,137,993	$9,718,307	$0	$0	$352,095	$23,856,301
2030	$14,591,036	$6,786,818	$0	$0	$405,812	$21,377,854
2031	$13,077,293	$5,937,108	$0	$0	$783,176	$19,014,401
2032	$12,961,867	$5,790,582	$0	$0	$578,125	$18,752,449
2033	$10,366,724	$5,478,479	$0	$0	$1,490,159	$15,845,203

Average Yearly Total: $20,499,100

Grand Total: $204,991,001

Pavement Network prior to treatments in lane miles.

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	62	11.4%	7.7%	14
Collector	51	4.3%	8.3%	7
Residential	49	13.1%	31.3%	11

Pavement Network after schedulable treatments applied in lane miles.

Pavement Network after schedulable treatments applied in lane miles.

2024

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	63	50.8%	28.9%	15
Collector	54	32.9%	48.3%	9
Residential	49	23.0%	55.3%	11

2025

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	65	52.4%	27.1%	15
Collector	55	40.4%	43.6%	10
Residential	47	21.1%	56.5%	10

2026

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	66	51.7%	21.9%	17
Collector	56	45.2%	39.0%	12
Residential	44	19.5%	58.5%	10

2027

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	67	56.3%	18.9%	17
Collector	57	52.7%	35.5%	13
Residential	42	16.9%	60.9%	9

2028

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	69	58.1%	15.1%	18
Collector	59	57.9%	32.6%	14
Residential	39	14.0%	63.1%	8

2029

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	70	61.0%	11.0%	18
Collector	60	58.5%	28.3%	15
Residential	37	9.8%	64.4%	8

2030

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	71	60.7%	7.0%	19
Collector	62	60.2%	25.1%	15
Residential	34	5.8%	65.4%	7

Pavement Network after schedulable treatments applied in lane miles.

2031

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	73	64.9%	4.9%	19
Collector	63	63.8%	22.8%	15
Residential	32	4.3%	67.6%	6

2032

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	74	69.6%	4.1%	20
Collector	64	65.7%	21.0%	16
Residential	30	4.0%	69.7%	6

2033

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	75	73.9%	6.5%	21
Collector	65	67.8%	20.3%	16
Residential	28	3.3%	72.1%	5

Target-Driven Scenarios
Network Condition Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: A-75, C-65

Objective: Minimum Network Average PCI | Target: By Functional Class and Year

Arterial	Value	Collector	Value	Residential/Local	Value	Other	Value
Year 1	63.3	Year 1	53.3	Year 1		Year 1	
Year 2	64.6	Year 2	54.6	Year 2		Year 2	
Year 3	65.9	Year 3	55.9	Year 3		Year 3	
Year 4	67.2	Year 4	57.2	Year 4		Year 4	
Year 5	68.5	Year 5	58.5	Year 5		Year 5	
Year 6	69.8	Year 6	59.8	Year 6		Year 6	
Year 7	71.1	Year 7	61.1	Year 7		Year 7	
Year 8	72.4	Year 8	62.4	Year 8		Year 8	
Year 9	73.7	Year 9	63.7	Year 9		Year 9	
Year 10	75	Year 10	65	Year 10		Year 10	

Projected Network Average PCI by year

Year	Never Treated	With Selected Treatment	Without Selected Treatment
2024	53	54	53
2025	50	53	50
2026	47	52	47
2027	45	51	45
2028	42	50	42
2029	39	49	39
2030	36	49	36
2031	33	48	33
2032	31	47	31
2033	29	47	29

Percent Network Area by Functional Classification and Condition Class

Condition in base year 2024, prior to applying treatments.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	11.4%	4.3%	13.1%	0.0%	28.8%
II / III	7.5%	4.1%	12.3%	0.0%	23.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2024 after schedulable treatments applied.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	13.5%	5.5%	13.1%	0.0%	32.0%
II / III	5.4%	3.1%	12.3%	0.0%	20.8%
IV	7.0%	6.5%	22.7%	0.0%	36.1%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2033 after schedulable treatments applied.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	19.6%	11.4%	1.9%	0.0%	32.8%
II / III	5.2%	2.0%	13.9%	0.0%	21.2%
IV	0.7%	0.0%	11.4%	0.0%	12.1%
V	1.0%	3.4%	29.5%	0.0%	33.9%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

City of Salinas

Target-Driven Scenarios - Cost Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: A-75, C-65

Objective: Minimum Network Average PCI | Target: By Functional Class and Year

Arterial	Value	Collector	Value	Residential/Local	Value	Other	Value
Year 1	63.3	Year 1	53.3	Year 1		Year 1	
Year 2	64.6	Year 2	54.6	Year 2		Year 2	
Year 3	65.9	Year 3	55.9	Year 3		Year 3	
Year 4	67.2	Year 4	57.2	Year 4		Year 4	
Year 5	68.5	Year 5	58.5	Year 5		Year 5	
Year 6	69.8	Year 6	59.8	Year 6		Year 6	
Year 7	71.1	Year 7	61.1	Year 7		Year 7	
Year 8	72.4	Year 8	62.4	Year 8		Year 8	
Year 9	73.7	Year 9	63.7	Year 9		Year 9	
Year 10	75	Year 10	65	Year 10		Year 10	

Year		Rehabilitation	Preventive Maintenance		Total Cost	Deferred
2024	II	$2,148,524	Non-Project	$182,668	$6,019,934	$348,582,757
	III	$2,492,544	Project	$0		
	IV	$1,196,198				
	V	$0				
	Total	$5,837,266				
	Project	$0				
2025	II	$490,825	Non-Project	$131,819	$23,075,832	$368,697,214
	III	$0	Project	$0		
	IV	$22,453,188				
	V	$0				
	Total	$22,944,013				
	Project	$0				
2026	II	$391,215	Non-Project	$2,741	$27,325,944	$391,661,633
	III	$1,138,006	Project	$0		
	IV	$23,529,945				
	V	$2,264,037				
	Total	$27,323,203				
	Project	$0				
2027	II	$1,575,332	Non-Project	$639,528	$25,573,567	$400,906,915
	III	$0	Project	$0		
	IV	$8,951,326				
	V	$14,407,382				
	Total	$24,934,039				
	Project	$0				
2028	II	$170,315	Non-Project	$349,373	$24,149,515	$405,723,069
	III	$0	Project	$0		
	IV	$5,753,641				
	V	$17,876,186				
	Total	$23,800,142				
	Project	$0				

Year	Rehabilitation		Preventive Maintenance		Total Cost	Deferred
2029	II	$0	Non-Project	$352,095	$23,856,301	$407,309,709
	III	$0	Project	$0		
	IV	$2,118,331				
	V	$21,385,875				
	Total	$23,504,206				
	Project	$0				
2030	II	$371,070	Non-Project	$405,812	$21,377,854	$400,114,014
	III	$0	Project	$0		
	IV	$1,571,468				
	V	$19,029,504				
	Total	$20,972,042				
	Project	$0				
2031	II	$527,675	Non-Project	$783,176	$19,014,401	$403,690,340
	III	$0	Project	$0		
	IV	$6,533,024				
	V	$11,170,526				
	Total	$18,231,225				
	Project	$0				
2032	II	$377,679	Non-Project	$578,125	$18,752,449	$413,759,131
	III	$0	Project	$0		
	IV	$11,653,572				
	V	$6,143,074				
	Total	$18,174,324				
	Project	$0				
2033	II	$249,346	Non-Project	$1,490,159	$15,845,204	$432,909,207
	III	$0	Project	$0		
	IV	$12,919,751				
	V	$1,185,948				
	Total	$14,355,045				
	Project	$0				

Summary

Functional Class	Rehabilitation	Prev. Maint.
Arterial	$123,504,851	$3,096,748
Collector	$76,570,653	$1,818,749
Residential/Local	$0	$0
Total:	$200,075,504	$4,915,497

Grand Total: $204,991,001

Target PCI's

Arterials 75, Collectors 65, Residentials 50

($327 Million over 10 Years)

- Pavement Network Condition Lane Miles
- Network Condition Summary
- Cost Summary

Scenario: A-75, C-65, R-50

Objective: Minimum Network Average PCI | Target: By Functional Class and Year

Arterial	Value	Collector	Value	Residential/Local	Value	Other	Value
Year 1	63.3	Year 1	53.3	Year 1	50	Year 1	
Year 2	64.6	Year 2	54.6	Year 2	50	Year 2	
Year 3	65.9	Year 3	55.9	Year 3	50	Year 3	
Year 4	67.2	Year 4	57.2	Year 4	50	Year 4	
Year 5	68.5	Year 5	58.5	Year 5	50	Year 5	
Year 6	69.8	Year 6	59.8	Year 6	50	Year 6	
Year 7	71.1	Year 7	61.1	Year 7	50	Year 7	
Year 8	72.4	Year 8	62.4	Year 8	50	Year 8	
Year 9	73.7	Year 9	63.7	Year 9	50	Year 9	
Year 10	75	Year 10	65	Year 10	50	Year 10	

Annual budget needs to meet target objectives

Year	Arterial	Collector	Res/Loc	Other	Preventative Maintenance	Total
2024	$2,856,350	$3,163,583	$3,785,847	$0	$2,140,278	$9,805,781
2025	$13,375,993	$9,699,839	$12,200,914	$0	$145,558	$35,276,746
2026	$16,466,549	$10,859,395	$13,186,581	$0	$2,788	$40,512,524
2027	$14,608,578	$10,964,990	$13,293,923	$0	$678,553	$38,867,491
2028	$14,159,216	$9,990,299	$14,278,266	$0	$357,270	$38,427,781
2029	$14,137,993	$9,718,307	$13,721,918	$0	$1,045,421	$37,578,219
2030	$14,591,036	$6,786,818	$15,344,968	$0	$447,246	$36,722,821
2031	$13,077,293	$5,937,108	$13,897,942	$0	$787,481	$32,912,343
2032	$12,961,867	$5,790,582	$12,141,707	$0	$625,655	$30,894,156
2033	$10,366,724	$5,478,479	$9,744,192	$0	$2,307,102	$25,589,396

Average Yearly Total: $32,658,726

Grand Total: $326,587,259

Pavement Network prior to treatments in lane miles.

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	62	11.4%	7.7%	14
Collector	51	4.3%	8.3%	7
Residential	49	13.1%	31.3%	11

Pavement Network after schedulable treatments applied in lane miles.

Pavement Network after schedulable treatments applied in lane miles.

2024

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	63	50.8%	28.9%	15
Collector	54	32.9%	48.3%	9
Residential	50	24.8%	55.3%	12

2025

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	65	52.4%	27.1%	15
Collector	55	40.4%	43.6%	10
Residential	50	32.0%	53.8%	12

2026

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	66	51.7%	21.9%	17
Collector	56	45.2%	39.0%	12
Residential	50	35.6%	51.6%	13

2027

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	67	56.3%	18.9%	17
Collector	57	52.7%	35.5%	13
Residential	50	39.2%	49.6%	14

2028

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	69	58.1%	15.1%	18
Collector	59	57.9%	32.6%	14
Residential	50	41.8%	47.0%	15

2029

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	70	61.0%	11.0%	18
Collector	60	58.5%	28.3%	15
Residential	50	43.6%	44.7%	15

2030

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	71	60.7%	7.0%	19
Collector	62	60.2%	25.1%	15
Residential	50	43.8%	42.5%	16

Pavement Network after schedulable treatments applied in lane miles.

2031

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	73	64.9%	4.9%	19
Collector	63	63.8%	22.8%	15
Residential	50	46.0%	40.8%	16

2032

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	74	69.6%	4.1%	20
Collector	64	65.7%	21.0%	16
Residential	50	46.4%	39.4%	16

2033

Functional Class	PCI	Percentage of the Network in Very Good Condition	Percentage of the Network in Poor or Very Poor Condition	Remaining Life
Arterial	75	73.9%	6.5%	21
Collector	65	67.8%	20.3%	16
Residential	50	47.9%	38.5%	17

Target-Driven Scenarios
Network Condition Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: A-75, C-65, R-50

Objective: Minimum Network Average PCI | Target: By Functional Class and Year

Arterial	Value	Collector	Value	Residential/Local	Value	Other	Value
Year 1	63.3	Year 1	53.3	Year 1	50	Year 1	
Year 2	64.6	Year 2	54.6	Year 2	50	Year 2	
Year 3	65.9	Year 3	55.9	Year 3	50	Year 3	
Year 4	67.2	Year 4	57.2	Year 4	50	Year 4	
Year 5	68.5	Year 5	58.5	Year 5	50	Year 5	
Year 6	69.8	Year 6	59.8	Year 6	50	Year 6	
Year 7	71.1	Year 7	61.1	Year 7	50	Year 7	
Year 8	72.4	Year 8	62.4	Year 8	50	Year 8	
Year 9	73.7	Year 9	63.7	Year 9	50	Year 9	
Year 10	75	Year 10	65	Year 10	50	Year 10	

Projected Network Average PCI by year

Year	Never Treated	With Selected Treatment	Without Selected Treatment
2024	53	54	53
2025	50	55	50
2026	47	55	47
2027	45	56	45
2028	42	56	42
2029	39	57	39
2030	36	58	36
2031	33	58	33
2032	31	59	31
2033	29	59	29

Percent Network Area by Functional Classification and Condition Class

Condition in base year 2024, prior to applying treatments.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	11.4%	4.3%	13.1%	0.0%	28.8%
II / III	7.5%	4.1%	12.3%	0.0%	23.9%
IV	7.0%	6.7%	22.7%	0.0%	36.3%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2024 after schedulable treatments applied.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	13.5%	5.5%	14.1%	0.0%	33.1%
II / III	5.4%	3.1%	11.3%	0.0%	19.8%
IV	7.0%	6.5%	22.7%	0.0%	36.1%
V	0.7%	1.6%	8.7%	0.0%	11.0%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

Condition in year 2033 after schedulable treatments applied.

Condition Class	Arterial	Collector	Res/Loc	Other	Total
I	19.6%	11.4%	27.1%	0.0%	58.1%
II / III	5.2%	2.0%	7.8%	0.0%	15.0%
IV	0.7%	0.0%	0.6%	0.0%	1.3%
V	1.0%	3.4%	21.2%	0.0%	25.6%
Total	26.5%	16.7%	56.7%	0.0%	100.0%

City of Salinas

Target-Driven Scenarios - Cost Summary

Interest: 0.00% Inflation: 0.00% Printed: 10/11/2023

Scenario: A-75, C-65, R-50

Objective: Minimum Network Average PCI | **Target: By Functional Class and Year**

Arterial	Value	Collector	Value	Residential/Local	Value	Other	Value
Year 1	63.3	Year 1	53.3	Year 1	50	Year 1	
Year 2	64.6	Year 2	54.6	Year 2	50	Year 2	
Year 3	65.9	Year 3	55.9	Year 3	50	Year 3	
Year 4	67.2	Year 4	57.2	Year 4	50	Year 4	
Year 5	68.5	Year 5	58.5	Year 5	50	Year 5	
Year 6	69.8	Year 6	59.8	Year 6	50	Year 6	
Year 7	71.1	Year 7	61.1	Year 7	50	Year 7	
Year 8	72.4	Year 8	62.4	Year 8	50	Year 8	
Year 9	73.7	Year 9	63.7	Year 9	50	Year 9	
Year 10	75	Year 10	65	Year 10	50	Year 10	

Year	Rehabilitation		Preventive Maintenance		Total Cost	Deferred
2024	II	$2,645,520	Non-Project	$2,140,278	$9,805,781	$344,796,910
	III	$3,823,785	Project	$0		
	IV	$1,196,198				
	V	$0				
	Total	$7,665,503				
	Project	$0				
2025	II	$3,262,177	Non-Project	$145,558	$35,276,746	$352,709,864
	III	$1,371,277	Project	$0		
	IV	$30,497,734				
	V	$0				
	Total	$35,131,188				
	Project	$0				
2026	II	$947,587	Non-Project	$2,788	$40,512,524	$362,487,113
	III	$1,138,006	Project	$0		
	IV	$36,160,105				
	V	$2,264,037				
	Total	$40,509,736				
	Project	$0				
2027	II	$1,575,332	Non-Project	$678,553	$38,867,491	$357,983,022
	III	$223,813	Project	$0		
	IV	$21,982,411				
	V	$14,407,382				
	Total	$38,188,938				
	Project	$0				
2028	II	$170,315	Non-Project	$357,270	$38,427,782	$348,122,012
	III	$241,060	Project	$0		
	IV	$19,782,951				
	V	$17,876,186				
	Total	$38,070,512				
	Project	$0				

Year		Rehabilitation	Preventive Maintenance		Total Cost	Deferred
2029	II	$861,302	Non-Project	$1,045,421	$37,578,219	$335,517,514
	III	$0	Project	$0		
	IV	$10,045,342				
	V	$25,626,154				
	Total	$36,532,798				
	Project	$0				
2030	II	$371,070	Non-Project	$447,246	$36,722,822	$312,017,038
	III	$0	Project	$0		
	IV	$3,573,424				
	V	$32,331,081				
	Total	$36,275,576				
	Project	$0				
2031	II	$540,073	Non-Project	$787,481	$32,912,343	$294,244,504
	III	$0	Project	$0		
	IV	$10,700,145				
	V	$20,884,644				
	Total	$32,124,862				
	Project	$0				
2032	II	$510,709	Non-Project	$625,655	$30,894,156	$283,102,305
	III	$0	Project	$0		
	IV	$14,934,101				
	V	$14,823,692				
	Total	$30,268,502				
	Project	$0				
2033	II	$1,187,170	Non-Project	$2,307,102	$25,589,396	$280,972,522
	III	$0	Project	$0		
	IV	$15,557,711				
	V	$6,537,414				
	Total	$23,282,294				
	Project	$0				

Summary

Functional Class	Rehabilitation	Prev. Maint.
Arterial	$123,504,851	$3,096,748
Collector	$76,570,653	$1,818,749
Residential/Local	$117,974,404	$3,621,853
Total:	$318,049,908	$8,537,350

Grand Total: $326,587,258

Appendix C
Definitions

DEFINITIONS

This section is intended to define important pavement design acronyms and terms used when discussing a Pavement Management Program (PMP).

GENERAL TERMS

AC - Asphaltic Concrete - A plant mixed asphalt binder (asphalt cement that is classified according to the Standard Specification for Performance Graded Asphalt Binder) and aggregate (rocks) thoroughly mixed and compacted into a mass.

ALLIGATOR CRACKING - Alligator or fatigue cracking is a series of interconnecting cracks caused by fatigue failure of the asphalt concrete surface under repeated traffic loading. Cracking begins at the bottom of the asphalt surface (or stabilized base) where the stress and strain are highest under a wheel load. The cracks propagate to the surface initially as a series of parallel longitudinal cracks. After repeated traffic loading, the cracks connect, forming many sided, sharp-angled pieces that develop a pattern resembling chicken wire or the skin of an alligator. Alligator cracking occurs only in areas subjected to repeated traffic loading, such as wheel paths. (Pattern-type cracking that occurs over an entire area not subjected to loading is called “block cracking,” which is not a load-associated distress.)

BLOCK CRACKING - Block cracks are interconnected cracks that divide the pavement into approximately rectangular pieces. Block cracking is caused mainly by shrinkage of the asphalt concrete and daily temperature cycling (which results in daily stress/strain cycling). It is not load-associated. Block cracking usually indicates that the asphalt has hardened significantly. Block cracking normally occurs over a large portion of the pavement area, but sometimes will occur only in non-traffic areas. This type of distress differs from alligator cracking in that alligator cracks form smaller, many-sided pieces with sharp angles. Also, unlike block, alligator cracks are caused by repeated traffic loadings, and are therefore found only in traffic areas (i.e., wheel paths).

CRITICAL PCI - The PCI value at which the rate of loss increases with time, or the cost of applying a maintenance treatment increases significantly.

DISTORTIONS (Bumps & Sags)- Bumps are small, localized, upward displacements of the pavement surface. They are different from shoves in that shoves are caused by unstable pavement. Sags are small, abrupt, downward displacements of the pavement surface. If bumps appear in pattern perpendicular to traffic flow and are spaced at less than 3 m (10 ft), the distress is called corrugation. Distortion and displacement that occur

over large areas of the pavement surface causing large and/or long dips in the pavement should be recorded at “swelling.”

EMULSION - A chemical added to water and asphalt that keeps the asphalt in a stable suspension in the water.

ESAL - The impact of trucks is measured in equivalent single 18,000 pound axle loads (Equivalent Single Axle Load).

FC - Functional Classification is the process by which streets and highways are grouped into classes, or systems, according to the character of traffic service that they are intended to provide. There are three highway functional classifications: arterial, collector, and local roads. All streets and highways are grouped into one of these classes, depending on the character of the traffic.

Arterials - provide the highest level of service at the greatest speed for the longest uninterrupted distance, with some degree of access control.

Collectors - provide a less highly developed level of service at a lower speed for shorter distances by collecting traffic from local roads and connecting them with arterials.

Residential/Local - consists of all roads not defined as arterials or collectors and primarily provides access to land with little or no through movement.

- (*Excerpted from the U.S. Department of Transportation, Federal Highway Administration web site on “Functional Classification”.)*

LONGITUDINAL / TRANSVERSE CRACKING - Longitudinal cracks are parallel to the pavement’s centerline or laydown direction. Transverse cracks extend across the pavement at approximately right angles to the pavement centerline or direction of laydown. These types of cracks are not usually load-associated.

OVERLAY - The placement of asphaltic concrete mix over an existing asphaltic concrete or portland cement concrete surface.

Light Overlay - would include any overlay of less than 2 inches of asphalt.

Heavy Overlay - is a thicker layer of asphalt and might include such items/operations as, but not limited to fabric, milling/grinding and reconstruction.

PATCHING & UTILITY CUTS - A patch is an area of pavement that has been replaced with new material to repair the existing pavement. A patch is considered a defect no matter how well it is performing (a patched area or adjacent area usually does not perform as well as an original pavement section). Generally, some roughness is associated with this distress.

PAVEMENT PRESERVATION - Applying the Right Treatment to the Right Pavement at the Right Time using the Right Materials.

PCC - Portland Cement Concrete

PCI - Pavement Condition Index - A rating scale for the condition of a road segment. 100 represents no defects and recent major rehabilitation.

PMP/ PMS - Pavement Management Program/ Pavement Management System - A program to aid in tracking the condition of roads and a means to help quantify the cost of maintaining the roads in a given area.

POTHOLES - Most often are structurally related distresses and should not be confused with raveling and weathering.

PREVENTIVE MAINTENANCE - Provides budget dollars for localized pavement repairs such as digouts and crack filling.

R-VALUE - A test to evaluate the base, subbase and subgrades of an area to be used in pavement designing for thickness of asphalt.

RAVELING - Raveling is the dislodging of coarse aggregate particles. Raveling may be caused by insufficient asphalt binder, poor mixture quality, insufficient compaction, segregation, or stripping. In addition, raveling may be caused by certain types of traffic, i.e., tracked vehicles. Softening of the surface and dislodging of the aggregates due to oil spillage are also included under raveling.

REFLECTIVE CRACKING - Cracks that occur in new “thin” overlays that are identical to the cracks that were present in the existing pavement.

RUTTING / SHOVING - A rut is a surface depression in the wheel paths. Pavement uplift may occur along the sides of the rut, but, in many instances, ruts are noticeable only after a rainfall when the paths are filled with water. Rutting stems from a permanent deformation in any of the pavement layers or subgrades, usually caused by consolidated or lateral movement of the materials due to traffic load.

Shoving is a permanent, longitudinal displacement of a localized area of the pavement surface caused by traffic loading. When traffic pushes against the pavement, it produces a short, abrupt wave in the pavement surface. This distress normally occurs only in unstable liquid asphalt mix (cutback or emulsion) pavements.

SLURRY SEAL - Includes a graded aggregate along with emulsion and water. Generally squeegeed and generally consists of two layers.

TI - Traffic Index - Cars and light trucks have little impact on the pavement structure. Larger/Heavier trucks have very significant impacts on the pavement due to the high axle weights. The total EALs is converted into a design Traffic Index (TI). The design TI is the total number of EALs that the pavement will support before it begins to fail, regardless of the passage of time. Normally for a new pavement, the EALs over a 20_year period are used. For rehabilitation procedures such as overlays, 10 years is generally used.

WEATHERING - Weathering is the loss of the fine aggregate from within the pavement matrix. This distress indicates that either the asphalt binder has hardened appreciably or that a poor quality mixture is present.

STREETSAVER® / REPORT DEFINITIONS

% LOAD RELATED - The percentage of the pavement distress in a management section that is load related distress (caused by excessive weight on the pavement surface).

% OF ENVIRONMENT - The percentage of the pavement distress in a management section that is an environment related distress.

% OTHER - Is the percentage of the pavement section that is not a load related or environment related distress.

ACTIVE - Indicates whether or not the current record is active.

ACTION / TREATMENT - A proposed type of rehabilitation work that should be used on a given road segment, based on PCI, FC and engineering evaluation.

ANNUAL BUDGET - The amount of money that is available each year to be used for pavement maintenance. These funds can come from various sources and can vary from year to year, although it is generally a fixed figure.

AREA - Contains the area of a section in square feet. This is automatically calculated using the values that are entered in the Length and Width fields. However, if the section is irregularly shaped the area can be entered by the user.

AREA ID - Is an optional, jurisdiction defined field to identify the area in which the section is located. For example, each neighborhood or subdivision, or each geographic type (mountain, valley, coast, etc.) in the jurisdiction may be assigned a letter of the alphabet.

BASE BUDGET - Provides an area for you to enter the dollar amount of your base budget.

BASE BUDGET INCREASE FACTOR - Stores the percent that the base budget will increase each year.

BASE PM SPLIT - Percent of the base budget that has been set aside for preventive maintenance.

BEGINNING LOCATION - Identifies the point that defines the beginning of the section. This is generally the name of a cross road or other landmark.

BRANCH - Generally a road name or a road name with a direction of travel.

CL - Centerline Mile - a measuring of the length of a road regardless of the width of the road.

CONDITION - Column lists the condition levels (2-5) that require stop-gap treatments.

COST/ SQ YD - Indicates the cost per square yard of road for the suggested treatment.

CURRENT PCI - Calculated from either a visual inspection or a maintenance treatment.

DESCRIPTION - Displays a description of the item named in the previous column in a grid.

DISTRESS - Contains the type of distress present on a section of a road.

DISTRESSES - Defects found in asphalt concrete (AC) pavements or portland cement concrete (PCC) pavements. These defects degrade the condition of the road.

DETERIORATION CURVE - This provides a graphical representation of the current pavement condition index and the historical PCIs for each section of road in your jurisdiction.

END LOCATION - Identifies the point that defines the end of the section. This is generally the name of a crossroad or other landmark.

EVENTS – This provides for viewing and maintaining of Events or changes that have been made on a management section. The Events that are included are:

- Management Section Creation.
- Results from Maintenance and Rehabilitation treatments that have been applied to the Management Section.
- Results from Visual Inspections of Management Sections.
- Listing of changes/edits of information on a Management Section.

EVENT ACTIVE - Indicates whether an Event is currently part of the active history for the current Section.

EVENT PCI - The PCI after the selected Event occurred.

EVENT TRANSACTION TYPE - Includes: Creation, Inspection, Treatment, Split, Combine, Attribute Change and Core Data Change.

EVENT VALID - Indicates if an Event can be activated and made part of the valid events for the current section.

FUNDING SOURCE - Is an optional, jurisdiction defined field to identify the funding source for the section; an example might be G for general fund.

GENERAL CODE - Is an optional, jurisdiction defined field used to identify sections of pavement sharing common characteristics, i.e., drainage type.

INFLATION RATE - Is the inflation used throughout your jurisdiction. You may wish to consult your financial department with this value.

INSPECTION AREA - Is the total area of the inspection unit.

INTEREST RATE - Contains the interest rate used throughout your jurisdiction.

LM - Lane Mile - a measurement of the length of all the lanes for a given FC or area.

LIFE EXTENSION - Is the number of years that a maintenance treatment extends the life of a pavement surface.

M&R, or MnR - An acronym for Maintenance and Rehabilitation, used to refer to treatment data or history in the StreetSaver® program.

MAINTENANCE/ REHABILITATION - This is used to review the proposed maintenance, new maintenance, and/ or rehabilitation for any road section in your jurisdiction.

M&R DATE - Displays the date the maintenance/ rehabilitation treatment was completed.

MANAGEMENT SECTION - This is used to maintain an inventory of all the roads and road sections in your jurisdiction.

MANAGEMENT UNIT - Relates a project to a management unit.

MILEPOSTS - Display the beginning and ending points of a management section.

NEW PCI - Stores the PCI value that was calculated after a treatment was applied.

NUMBER OF SURFACE SEALS BEFORE OVERLAY - Displays the recommended number of surface seals before the application of an overlay.

OLD PCI - Displays the pavement condition index before a treatment was applied.

OPTIMUM PCI – The Optimum PCI refers to the highest PCI level the overall network can achieve within the given “Budget Needs” time frame. That level is dependent on the parameters set in the Decision Tree and where the PCI Breakpoints are set. Changes made to the either the timing, or the treatments, within the Decision Tree, or to the value of each of the PCI Breakpoints will directly affect the Optimum PCI.

OTHER - Displays the weighting factor applied to management sections with functional classes other than arterial, collector, and residential.

OVERLAY - Displays the overlay code that corresponds to an overlay procedure.

OVERLAY CODE - Is an identifier for the treatment type; use one of the six codes from the pop-up list that appears when this is activated.

PCI CAP - Stores the maximum PCI value that will be included in needs and scenario calculations. If a PCI value is larger than the PCI Cap value, it will not be included.

PCI EFFECTIVENESS CUT-OFF - Contains the minimum PCI value used in calculating the area under the projected performance curve. That area is used in ranking sections needing work, and the area below the PCI Cut-Off value is not included in that area. It should generally be the lowest PCI value that defines the minimum acceptable condition for all of the pavement types and functional classification groupings.

PCI HIGH - LOW > 25 - Is marked if the difference between the high and low PCI values is greater than 25.

PCI HIGH VALUE - Is the maximum PCI value for an inspection unit used in the last PCI calculation for a management unit.

PCI LOW VALUE - Is the minimum PCI value for an inspection unit used in the last PCI calculation for a management unit.

PM% - Scenarios based on a yearly budget, this column stores the percent that has been set aside for preventive maintenance.

RATING - The rating is the weighted cost effectiveness ratio of the recommended treatment. Also referred to as Weighted Effectiveness Ratio (WER)

REPLACEMENT COST - Is the cost per square yard to install a new pavement surface.

RESIDENTIAL $ - Indicates the cost of a stop-gap treatment per square yard when applied to a road with a residential functional class and a given condition.

ROAD ID - Contains a two-character identifier that was assigned to the road. The combination of Road Number, Road Name, and Road ID must be unique for each road section.

ROAD NAME - Displays the name of the road that corresponds to the road number and road ID. The combination of Road Number, Road Name, and Road ID must be unique for each road section.

ROAD NUMBER - Contains the number that was assigned to a road. The combination of Road Number, Road Name, and Road ID must be unique for each road section.

SECTION - Usually a branch or road is large and needs to be divided into smaller pieces to maintain. These smaller pieces are labeled as "**Sections**" or "**Segments**" and designated with a number and a beginning and ending location.

SECTION ID - Is an identifier that is unique for each section of a given street. Note that the Street ID and the Section ID combined describe the individual section. Therefore, that combination must be unique. The same Section ID can be reused as long as it is used in conjunction with a different Street ID each time.

SEGMENT LENGTH - Is the length in feet of the management section.

SELECT MANAGEMENT SECTIONS - Allows you to calculate PCI values based on selected management sections. If this button is marked, the management sections that have had records updated since the last calculations are displayed in a grid. Select the management sections you want included in the calculations from this grid.

SPECIAL - Check box is marked if the displayed inspection unit is non-representative of a section as a whole.

SPECIAL UNIT - The information will either be Y or blank. Y is an indication that this inspection unit is in some way non-representative of the section as a whole, and would receive a different maintenance/rehabilitation treatment from the rest of the section.

STANDARD INSPECTION UNITS - Is the typical number of inspection units that would be used for a particular management section.

STOP-GAP APPLICATION INTERVAL - Indicates the number of years between the applications of stop-gap treatments.

STREET ID - Is an identifier that is unique for each street. The Street ID usually bears some similarity to the actual street name.

STREET NAME - Is the full name of the street including “Street”, “Way”, “Court” etc.

SURFACE TYPE - Describes the type of surface for a specific section of road. The options for this field are:

- **A - AC** for asphalt concrete,
- **C - AC/PCC** for asphalt concrete over Portland cement concrete,
- **O - AC/AC** for overlays of asphalt concrete over asphalt concrete,
- **P - PCC** for Portland cement concrete,
- **S - ST** for surface treatment (This Surface Type is not used very often, as it refers to roads that are neither AC, or PCC, but have a surface treatment over dirt or gravel.)

TREATMENT - Contains the type of treatment the road received or will receive.

TREATMENT COST - Is an optional field giving the cost in dollars and cents of the treatment.

UNIT OF MEASURE - Displays the units of measure used to measure an item.

UNIT PRICE - Displays the price paid for an inventory item.

VISUAL PCI - Used to identify PCI calculations that have been determined based upon a visual inspection. If this check box is blank, then the PCI was extrapolated based upon the maintenance treatment that has been applied to a management section.

WEIGHTING FACTORS - Section displays the weighting factors established by your jurisdiction for the functional classes.

YEAR OF MAINTENANCE - Stores the proposed year of a treatment.

YEARS BETWEEN CRACK SEALS - Displays the number of years between the application of crack seals for the functional class with a specific severity.

YEARS BETWEEN SURFACE SEALS - Displays the recommended number of years that should come between surface seal application for the functional class with the indicated severity.

YEARS TO CALCULATE - Stores the number of years you want to include in the Budget Needs calculation. The number of years cannot be less than 5 or more than 20.

ZONES - Geographical areas of the city defined by city staff to aid in the development of a maintenance plan for residential roads.