CITYWIDE SIDEWALK REPAIR PROJECT
PHASE II
PROJECT NO. 9720

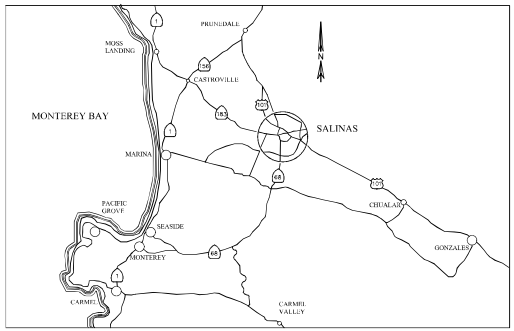

VICINITY MAP

NOT TO SCALE

SALINAS

INDEX OF SHEETS	SHEET NO.	BASE BID
TITLE SHEET	1	1
LOCATION MAP	2	1-2
DETAILS	3	1-2
CALTRANS STANDARD PLANS	4	1-2
LOCATION 1 RANCHERO DRIVE QUANTITIES	5	1
LOCATION 1 RANCHERO DRIVE	6-7	1
LOCATION 2 FIRST AVENUE QUANTITIES	8	1
LOCATION 2 FIRST AVENUE	9-10	1
LOCATION 3 TAPADERO STREET QUANTITIES	11	1
LOCATION 3 TAPADERO STREET	12	1
LOCATION 4 VAN BUREN AVENUE QUANTITIES	13	1
LOCATION 4 VAN BUREN AVENUE	14-16	1
LOCATION 5 PENNSYLVANIA DRIVE QUANTITIES	17	1
LOCATION 5 PENNSYLVANIA DRIVE	18	1
LOCATION 6 DELANCEY DRIVE QUANTITIES	19	1
LOCATION 6 DELANCEY DRIVE	20-21	1
LOCATION 7 E. ROMIE LANE QUANTITIES	22	2
LOCATION 7 E. ROMIE LANE	23-26	2
LOCATION 8 EISENHOWER QUANTITIES	27	2
LOCATION 8 EISENHOWER STREET	28-30	2
EROSION & SEDIMENT CONTROL	31-35	1-2

GENERAL NOTES

1. THE WORK IN GENERAL SHALL INCLUDE FURNISHING OF ALL LABOR, MATERIALS, TOOLS, EQUIPMENT AND INCIDENTALS REQUIRED FOR CONSTRUCTION IN ACCORDANCE WITH THE PLANS AND ATTACHED SPECIFICATIONS. THE LIMITS OF WORK SHALL BE ON EAST MARKET STREET BETWEEN MERCED STREET AND SHERWOOD DRIVE AND MORE FULLY DESCRIBED AS FOLLOWS:

   IN GENERAL THE WORK SHALL INCLUDE, BUT IS NOT LIMITED TO THE CONSTRUCTION AND RECONSTRUCTION OF NEW; CONCRETE SIDEWALK, CURB AND GUTTER, AND DRIVEWAY. WORK SHALL ALSO INCLUDE REMOVAL AND PLANTING OF TREES.

2. EXCEPT AS OTHERWISE SPECIFIED, ALL WORK AND MATERIALS SHALL CONFORM TO AND BE IN ACCORDANCE WITH THE APPLICABLE PROVISIONS OF THE CITY OF SALINAS, STANDARD SPECIFICATIONS, DESIGN STANDARDS, AND STANDARD PLANS (2008 EDITION), IN CONJUNCTION WITH CALIFORNIA 2014 MUTCD SPECIFICATIONS. IN CASE OF CONFLICT BETWEEN SAID DOCUMENTS, THE MOST STRINGENT REQUIREMENT SHALL APPLY AS DETERMINED BY THE CITY ENGINEER.

3. THE EXISTING FACILITIES INDICATED ON THESE PLANS ARE DESIGNATED AS CLOSELY AS POSSIBLE TO REPRESENT EXISTING CONDITIONS. HOWEVER, IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO ASCERTAIN THE EXISTENCE AND LOCATION OF ALL UNDERGROUND AND OVERHEAD FACILITIES AND TO PROTECT THEM FROM DAMAGE. THE CONTRACTOR SHALL BEAR TOTAL EXPENSE OF REPAIR OR REPLACEMENT OF ANY UNDERGROUND OR OVERHEAD FACILITIES DAMAGED BY HIS/HER OPERATIONS. THE CONTRACTOR SHALL CONTACT U.S.A. (UNDERGROUND SERVICE ALERT, TELEPHONE NUMBER 1-800-227-2600) 48 HOURS IN ADVANCE BEFORE PERFORMING ANY TRENCHING AND/OR EXCAVATION WORK.

4. LIMITS FOR THE REMOVAL AND RECONSTRUCTION OF MISCELLANEOUS CONCRETE FACILITIES, INCLUDING SIDEWALKS, DRIVTWAYS, AND CURB AND GUTTERS, AND TREE WELLS SHALL BE MARKED IN THE FIELD BY THE CITY ENGINEER PRIOR TO THE BEGINNING OF CONSTRUCTION.

5. ANY EXISTING RAISED PAVEMENT MARKERS, LEGEND, AND/OR STRIPING THAT IS DAMAGED AND/OR REMOVED DURING TRENCHING AND/OR EXCAVATION SHALL BE REPLACED BY THE CONTRACTOR PER THE PLANS AND SPECIFICATIONS. ALL REPLACED LEGENDS AND STRIPING SHALL BE THERMOPLASTIC AS SPECIFIED IN THE SPECIFICATIONS.

6. CONTRACTOR SHALL RE-INSTALL CURB MARKINGS RED ZONE, THAT ARE IMPACTED/REMOVED BY WORK OF THIS PROJECT STATED IN THE SPECIFICATIONS, AND AS SHOWN ON THE PLANS.GREEN ZONE, YELLOW ZONE, WHITE ZONE, AND/OR BLUE ZONE THAT ARE IMPACTED/REMOVED BY WORK OF THIS PROJECT SHALL BE VERIFIED BY THE CITY ENGINEER PRIOR TO THE REINSTALLATION.

7. IN THE EVENT OF ANY CONFLICT OF INFORMATION SHOWN ON THE PLANS, THESE SPECIFICATIONS, ANY CONFLICT BETWEEN THE PLAN AND THE INTENT FOR A CONSISTENT AND FUNCTIONAL FACILITY OR IN THE FIELD THE CONTRACTOR SHALL NOTIFY THE CITY ENGINEER IN WRITING, UPON WHICH TIME THE CITY ENGINEER SHALL RESOLVE THE CONFLICT BY THE ISSUANCE OF A WRITTEN CHANGE ORDER BY REVISING THE PLAN, SPECIFICATIONS AND/OR BOTH. THE CONTRACTOR SHALL BEAR FULL COST AND RESPONSIBILITY FOR WORK AFFECTED BY SUCH UNRESOLVED CONFLICTS AND PERFORMED BY THE CONTRACTOR PRIOR TO THE RESOLUTION BY THE CITY ENGINEER.

8. THE CONTRACTOR SHALL EXERCISE ALL NECESSARY CAUTION TO AVOID DAMAGE TO ANY EXISTING TREES, LANDSCAPE, UTILITIES AND/OR SURFACE IMPROVEMENTS WHICH ARE TO REMAIN IN PLACE, AND SHALL BEAR FULL RESPONSIBILITY FOR ANY DAMAGE THERETO.

9. THE CONTRACTOR IS RESPONSIBLE TO ENSURE THAT FINISHED AREAS OF THE PROJECT ARE PROTECTED FROM ANY DAMAGE, WHICH MAY RESULT FROM ADJACENT AREAS STILL UNDER CONSTRUCTION.

10. ALL WORK TO BE SCHEDULED AND COORDINATED BY THE CONTRACTOR WITH THE CONSTRUCTION ACTIVITIES OF THE UTILITY COMPANIES AND/OR ANY OTHER CONTRACTOR(S) WORKING IN THE AREA.

11. THE CONTRACTOR AGREES THAT HE/SHE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS, INCLUDING THE SAFETY OF PERSONS AND PROPERTY, DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT AND THAT THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE CITY AND THE CITY ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE CITY OR THE CITY ENGINEER.

    THE SIDEWALK SCHEDULE REFLECTS THE CITY'S RIGHT-OF-WAY, WHICH IS THE DISTANCE FROM THE FACE OF CURB TO THE PROPERTY LINE. HOWEVER, EXISTING CURBS SHOULD NOT BE USED TO LOCATE PROPERTY LINES SINCE THEY ARE NOT LOCATED EXACTLY ON LINE. THE CITY OF SALINAS IS NOT, EXPRESSLY OR BY IMPLICATION, RESPONSIBLE FOR ACCURACY OF THE SIDEWALK SCHEDULE, FOR INFORMATION ONLY. THE SIDEWALK SCHEDULE BOOK IS LOCATED AT THE LINK BELOW:
    https://www.cityofsalinas.org/files/sharedassets/city-v/1/public-works/documents/2020_sidewalk_schedule.pdf

12. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL MATERIALS, EQUIPMENT, LABOR AND INCIDENTAL FOR THE PROJECT EXCEPT AS SHOWN N.I.C., BY OTHERS (NOT IN CONTRACT OR BY OTHERS) OR CITY FURNISHED MATERIAL.

13. CONTRACTOR SHALL REMOVE ALL CONTAMINATED WATER FROM SAW CUTTING PAVEMENT. CONTAMINATED WATER SHALL BE REMOVED AND DISPOSED OF BY AN ENVIRONMENTALLY APPROVED METHOD, AND AS APPROVED BY THE CITY ENGINEER.

14. ALL QUANTITIES AS SHOWN ON THE PLANS ARE APPROXIMATE ONLY AND FOR THE CONTRACTOR'S INFORMATION ONLY. THE CITY OF SALINAS DOES NOT, EXPRESSLY OR BY IMPLICATION, AGREE THAT THE ACTUAL AMOUNT OF WORK SHALL CORRESPOND THEREWITH. PAYMENT SHALL BE MADE ONLY ON THE BASIS OF THE ACTUAL QUANTITIES OF WORK PERFORMED.

15. SITE VERIFY ALL (E) CONDITIONS IN THE FIELD AND REPORT IN WRITING TO THE CITY ENGINEER IF YOU FIND ANYTHING THAT DEVIATES FROM THE DRAWINGS.

16. EVERYTHING SHOWN (E) IS TO REMAIN.

SEDIMENT CONTROL NOTES

1. ALL DRAINAGE INLETS RECEIVING RUNOFF FROM DISTURBED SOIL AREAS SHALL BE PROTECTED WITH A GRAVEL BAG SEDIMENT TRAP INLET PROTECTION.

2. EROSION CONTROL TYPE-1 NON-ELOATABLE MULCH OR PLANTING SHALL BE IMPLEMENTED AT ANY AREAS OF DISTURBED SOIL.

Know what's **below.** **Call** before you dig.

CITY OF SALINAS
PUBLIC WORKS DEPARTMENT

DESIGNED BY: J. ESTEBAN
DRAWN BY: VS, AO, JH
CONSTRUCTION REVIEW: A. ALFARO
PROJECT ENGINEER / MANAGER: V. SANCHEZ

APPROVED FOR CONSTRUCTION:
DATE _____
ADRIANA ROBLES, P.E., C.F.M.
CITY ENGINEER

ADRIANA ROBLES — NO. 69142 — Civil — STATE OF CALIFORNIA

REVIEWED BY:
DATE _____

REVIEWED BY:
DATE _____
DAVID T. JACOBS, P.E., L.S.
PUBLIC WORKS DIRECTOR

DATE	REVISION	APP.

CITYWIDE SIDEWALK REPAIR PROJECT PHASE 2

TITLE SHEET

PROJ. NO(S): 9720
FILE NO.: 8244
SHEET NO.: 1
OF: 35

File Path: J:\9720 - 2911 50\9720 Citywide Sidewalk Repair Project II 2\PRP\Dwg\Arch\ 2 Sheets.dwg